

UCR SERIES CURVE BOOK

ULTRACHEM[®] ANSI-DIMENSIONAL PUMPS



3/31/25 Rev. 0

TABLE OF CONTENTS

Model UCR1516

3500 rpm, 60 Hz, 1-1/2" x 1"	4
1750 rpm, 60 Hz, 1-1/2" x 1"	5
2900 rpm, 50 Hz, 1-1/2" x 1"	6
1450 rpm, 50 Hz, 1-1/2" x 1"	7

Model UCR1516L

3500 rpm, 60 Hz, 1-1/2" x 1"	8
1750 rpm, 60 Hz, 1-1/2" x 1"	9
2900 rpm, 50 Hz, 1-1/2" x 1"	10
1450 rpm, 50 Hz, 1-1/2" x 1"	11

Model UCR1518

3500 rpm, 60 Hz, 1-1/2" x 1"	12
1750 rpm, 60 Hz, 1-1/2" x 1"	13
2900 rpm, 50 Hz, 1-1/2" x 1"	14
1450 rpm, 50 Hz, 1-1/2" x 1"	15

Model UCR1518L

3500 rpm, 60 Hz, 1-1/2" x 1"	16
1750 rpm, 60 Hz, 1-1/2" x 1"	17
2900 rpm, 50 Hz, 1-1/2" x 1"	18
1450 rpm, 50 Hz, 1-1/2" x 1"	19

Model UCR2110

3500 rpm, 60 Hz, 2" x 1"	20
1750 rpm, 60 Hz, 2" x 1"	21
2900 rpm, 50 Hz, 2" x 1"	22
1450 rpm, 50 Hz, 2" x 1"	23

Model UCR2110L

3500 rpm, 60 Hz, 2" x 1"	24
1750 rpm, 60 Hz, 2" x 1"	25
2900 rpm, 50 Hz, 2" x 1"	26
1450 rpm, 50 Hz, 2" x 1"	27

Model UCR3110

3500 rpm, 60 Hz, 3" x 1"	28
1750 rpm, 60 Hz, 3" x 1"	29
2900 rpm, 50 Hz, 3" x 1"	30
1450 rpm, 50 Hz, 3" x 1"	31

Model UCR3156

3500 rpm, 60 Hz, 3" x 1-1/2"	32
1750 rpm, 60 Hz, 3" x 1-1/2"	33
2900 rpm, 50 Hz, 3" x 1-1/2"	34
1450 rpm, 50 Hz, 3" x 1-1/2"	35

Model UCR3158

3500 rpm, 60 Hz, 3" x 2"	36
1750 rpm, 60 Hz, 3" x 2"	37
2900 rpm, 50 Hz, 3" x 2"	38
1450 rpm, 50 Hz, 3" x 2"	39

Model UCR326

3500 rpm, 60 Hz, 3" x 2"	40
1750 rpm, 60 Hz, 3" x 2"	41
2900 rpm, 50 Hz, 3" x 2"	42
1450 rpm, 50 Hz, 3" x 2"	43

Model UCR326H

3500 rpm, 60 Hz, 3" x 2"	44
1750 rpm, 60 Hz, 3" x 2"	45
2900 rpm, 50 Hz, 3" x 2"	46
1450 rpm, 50 Hz, 3" x 2"	47

Model UCR328

3500 rpm, 60 Hz, 3" x 1-1/2"	48
1750 rpm, 60 Hz, 3" x 1-1/2"	49
2900 rpm, 50 Hz, 3" x 1-1/2"	50
1450 rpm, 50 Hz, 3" x 1-1/2"	51

Model UCR3210

3500 rpm, 60 Hz, 3" x 2"	52
1750 rpm, 60 Hz, 3" x 2"	53
2900 rpm, 50 Hz, 3" x 2"	54
1450 rpm, 50 Hz, 3" x 2"	55

Model UCR436

3500 rpm, 60 Hz, 4" x 3"	56
1750 rpm, 60 Hz, 4" x 3"	57
2900 rpm, 50 Hz, 4" x 3"	58
1450 rpm, 50 Hz, 4" x 3"	59

Model UCR436L

3500 rpm, 60 Hz, 4" x 3"	60
1750 rpm, 60 Hz, 4" x 3"	61
2900 rpm, 50 Hz, 4" x 3"	62
1450 rpm, 50 Hz, 4" x 3"	63

Model UCR438

3500 rpm, 60 Hz, 4" x 3"	64
1750 rpm, 60 Hz, 4" x 3"	65
2900 rpm, 50 Hz, 4" x 3"	66
1450 rpm, 50 Hz, 4" x 3"	67

Model UCR4310H

1750 rpm, 60 Hz, 4" x 3"	68
1450 rpm, 50 Hz, 4" x 3"	69

Model UCR6410

1750 rpm, 60 Hz, 6" x 4"	70
1450 rpm, 50 Hz, 6" x 4"	71

FINISH THOMPSON INC. - HEADQUARTERS


921 Greengarden Road | Erie, PA 16501
800.934.9384 | ph 814.455.4478 | fx 814.455.8518
email sales@finishthompson.com

FINISH THOMPSON INC. - EUROPE CENTER

Otto-Hahn-Strasse 16 | Maintal, D-63477 Germany
49 (0)6181-90878-0 | fx 49 (0)6181-90878-18
email europecenter@finishthompson.com

UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR1516
3500 RPM, 60-Hz
Suction: 1.5" Flange
Discharge: 1" Flange
S.G. 1.0

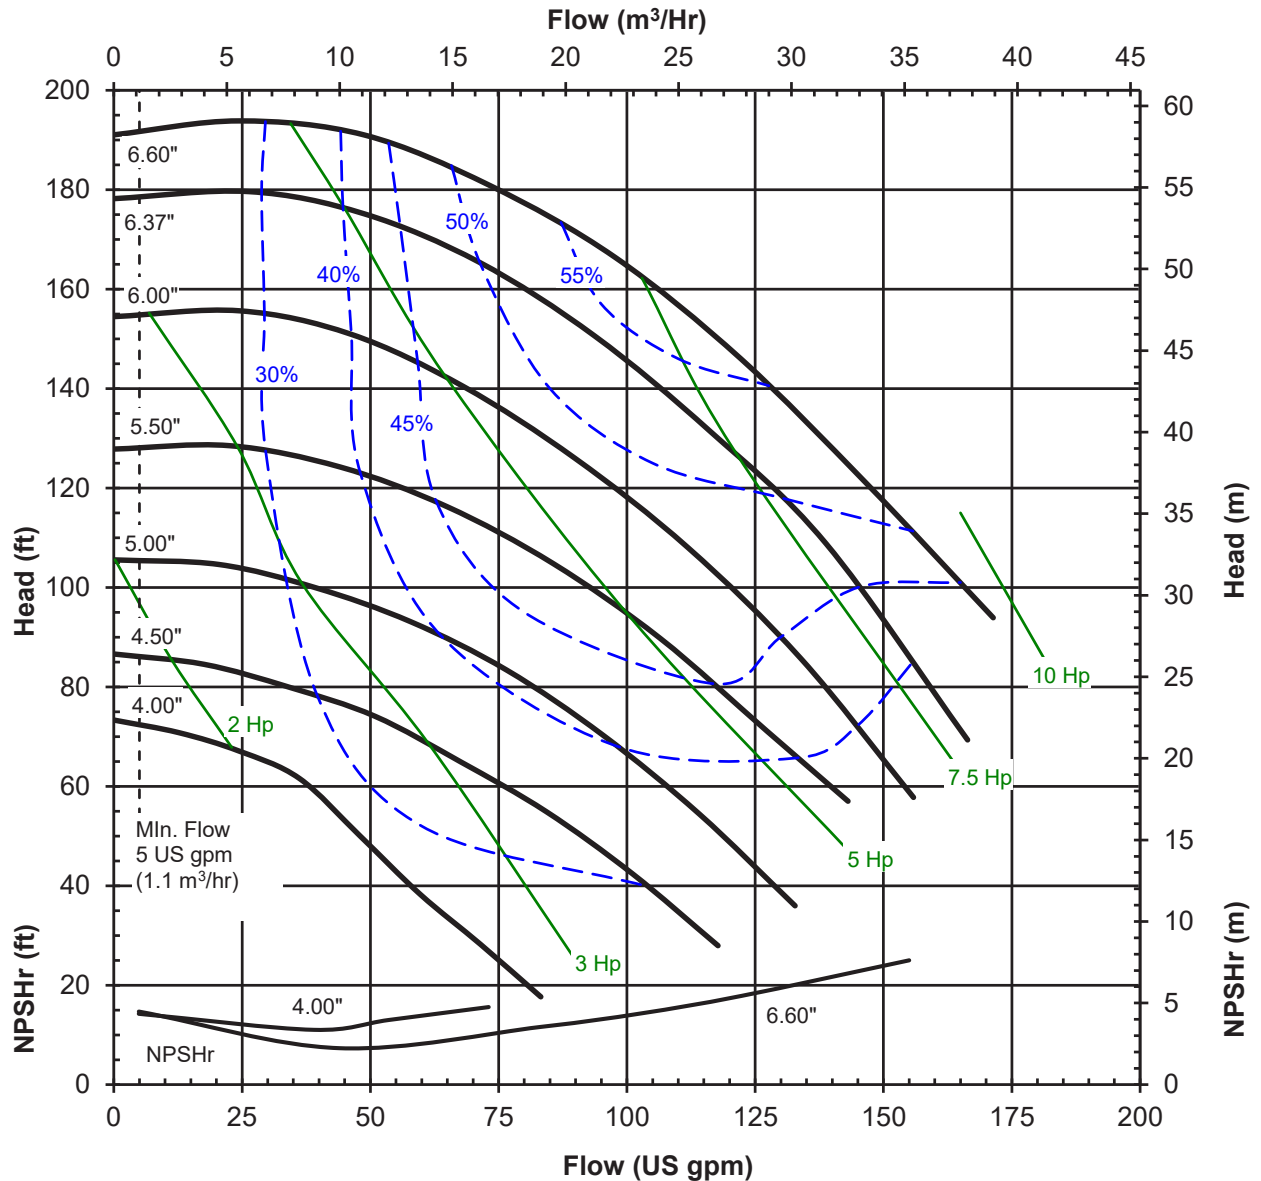


Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.25") between all curves



UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR1516
1750 RPM, 30-Hz
Suction: 1.5" Flange
Discharge: 1" Flange
S.G. 1.0

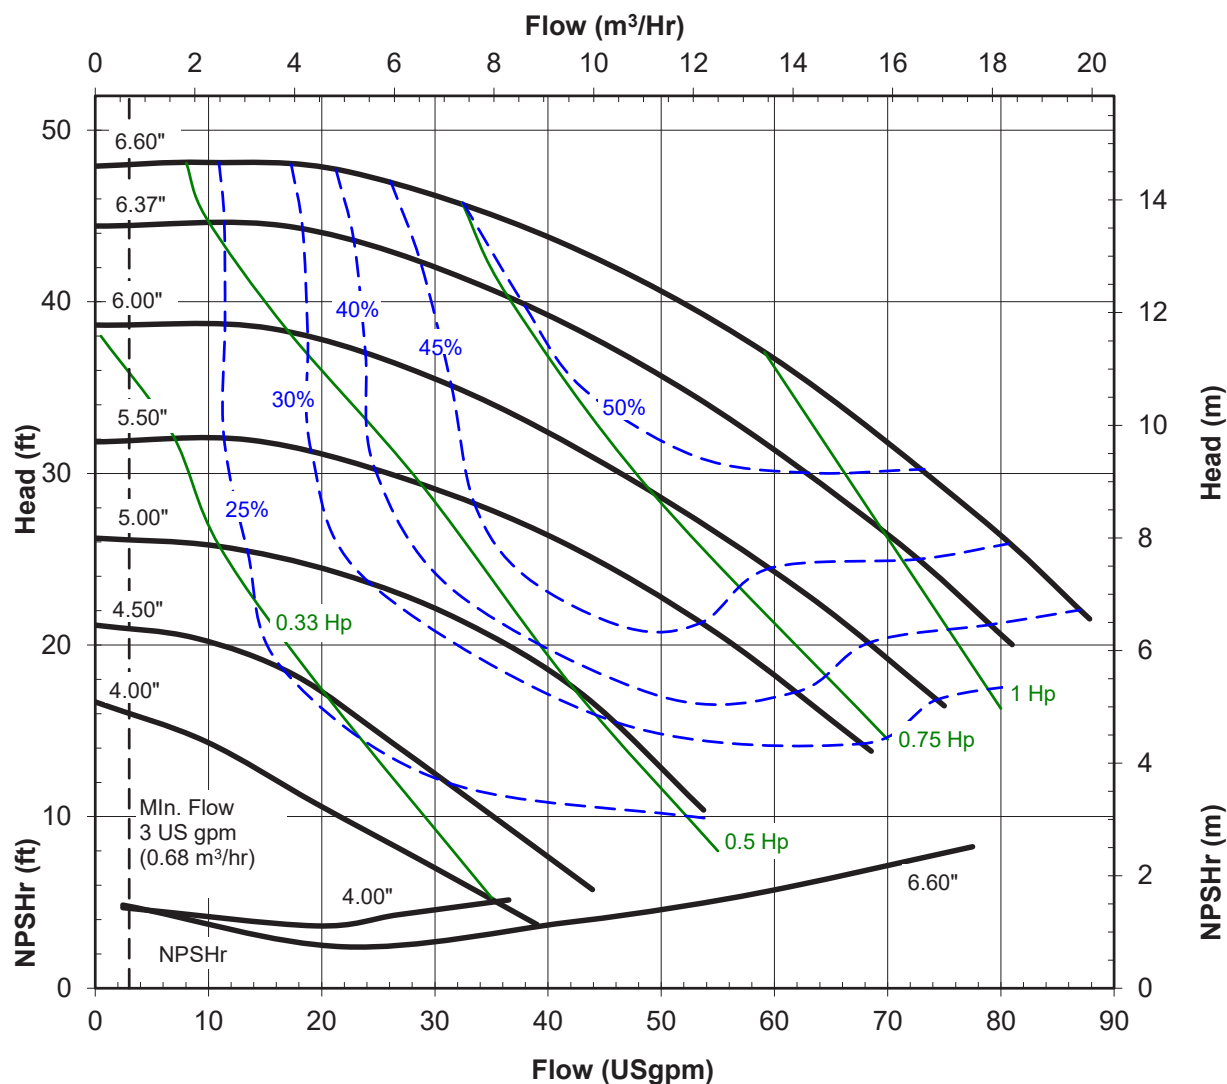

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.25") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR1516
2900 RPM, 50-Hz
Suction: 1.5" Flange
Discharge: 1" Flange
S.G. 1.0

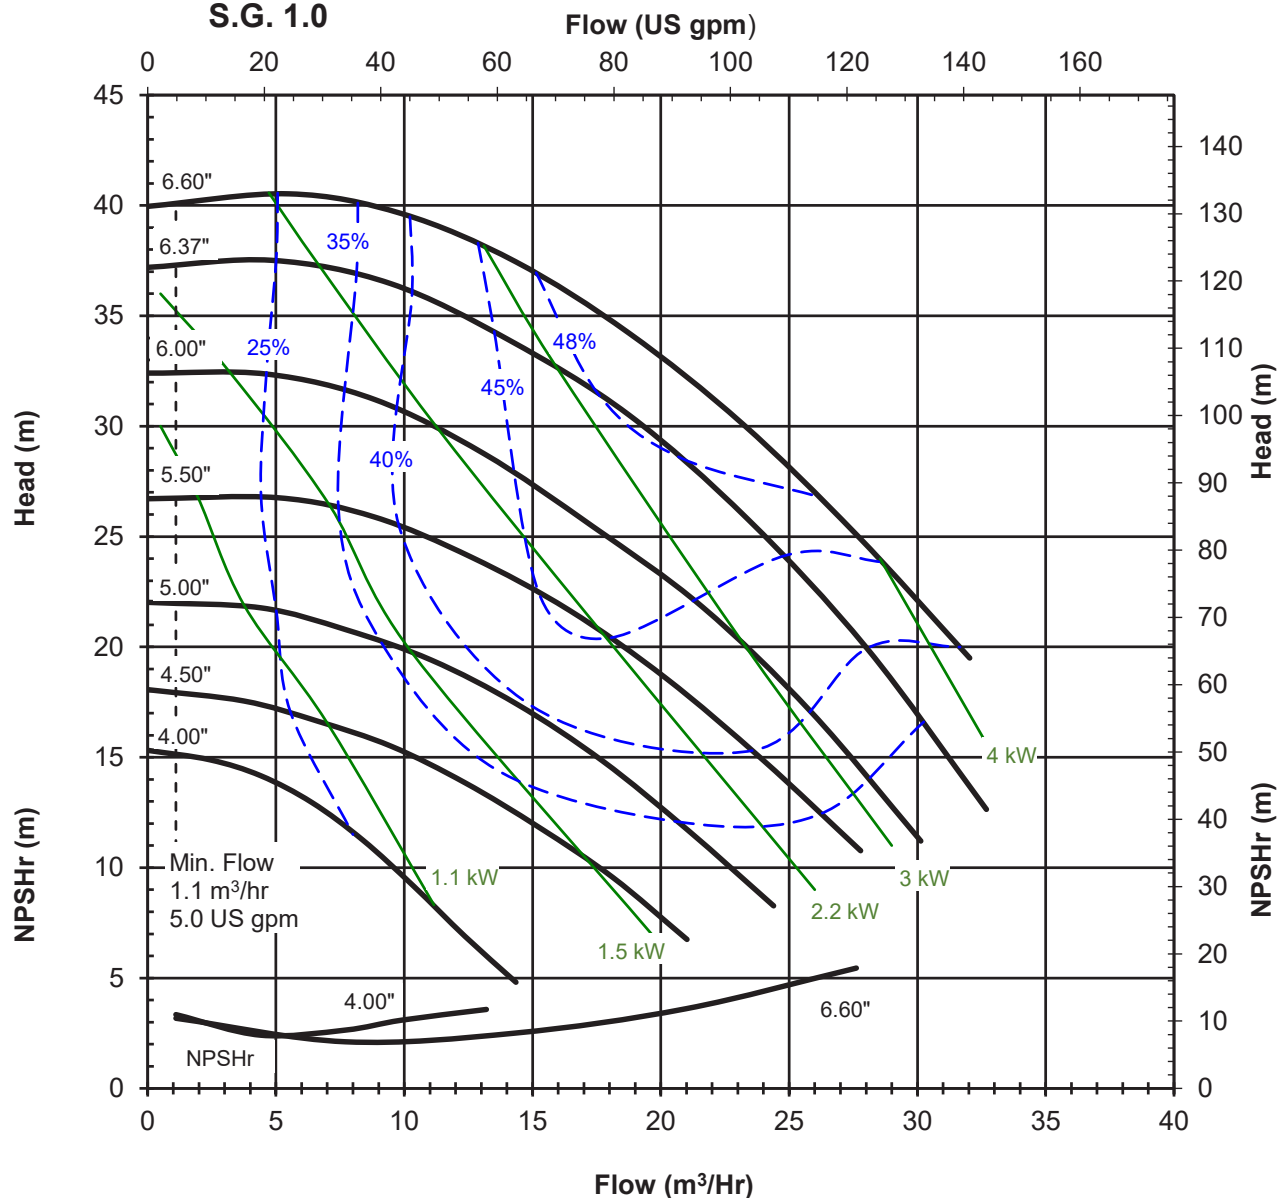

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.25") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR1516
1450 RPM, 25-Hz
Suction: 1.5" Flange
Discharge: 1" Flange
S.G. 1.0

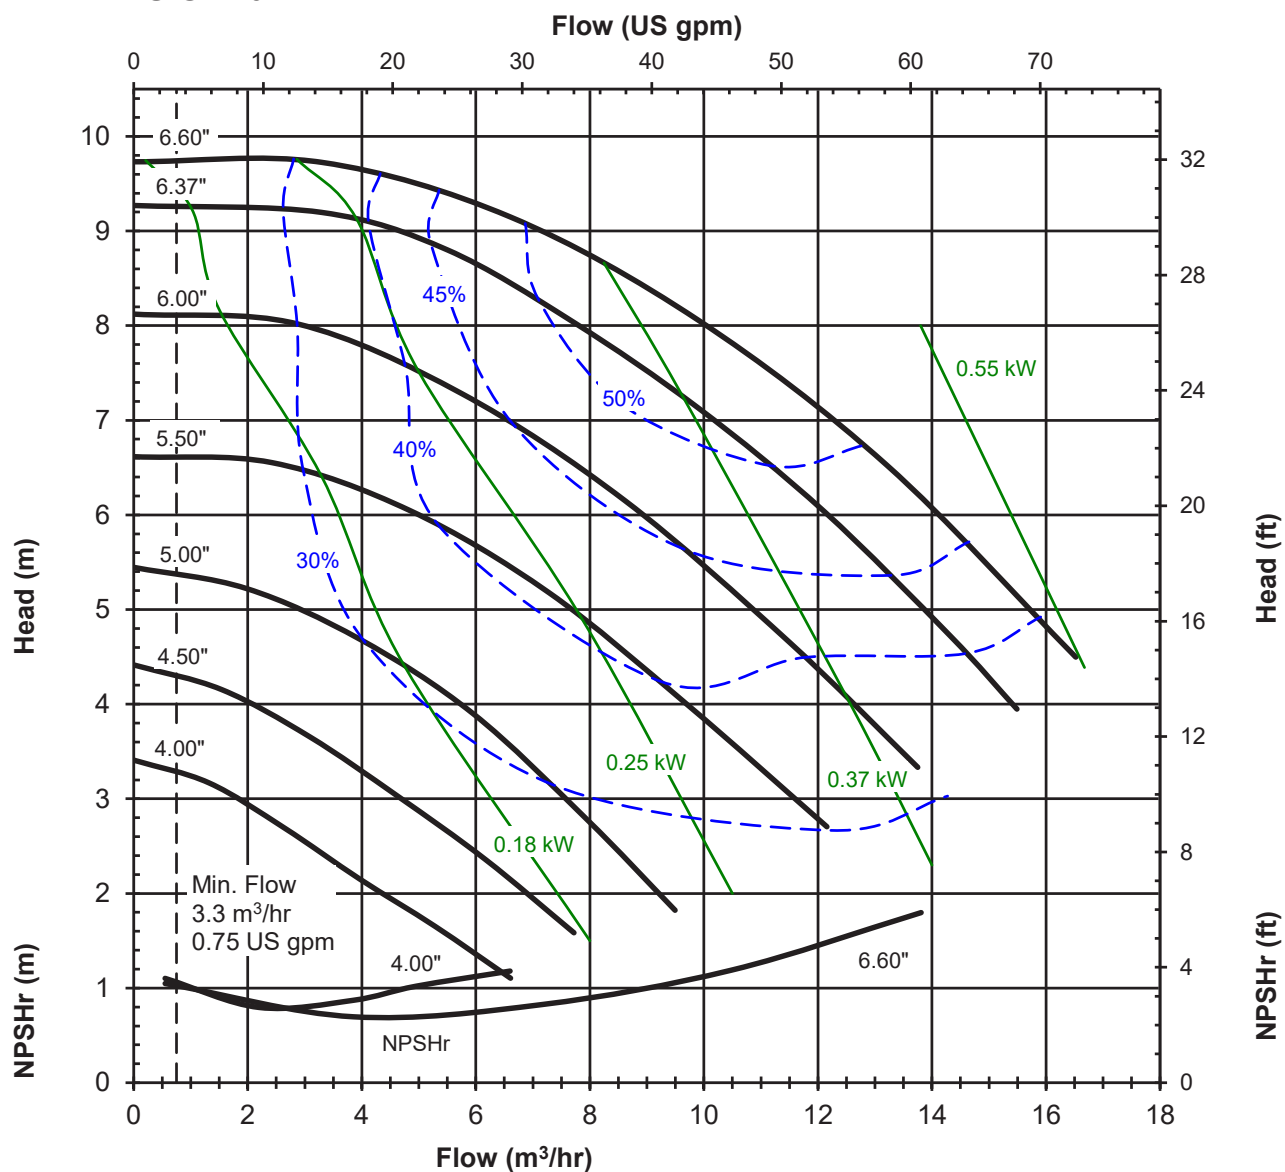

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.25") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR1516L
3500 RPM, 60-Hz
Suction: 1.5" Flange
Discharge: 1" Flange
S.G. 1.0

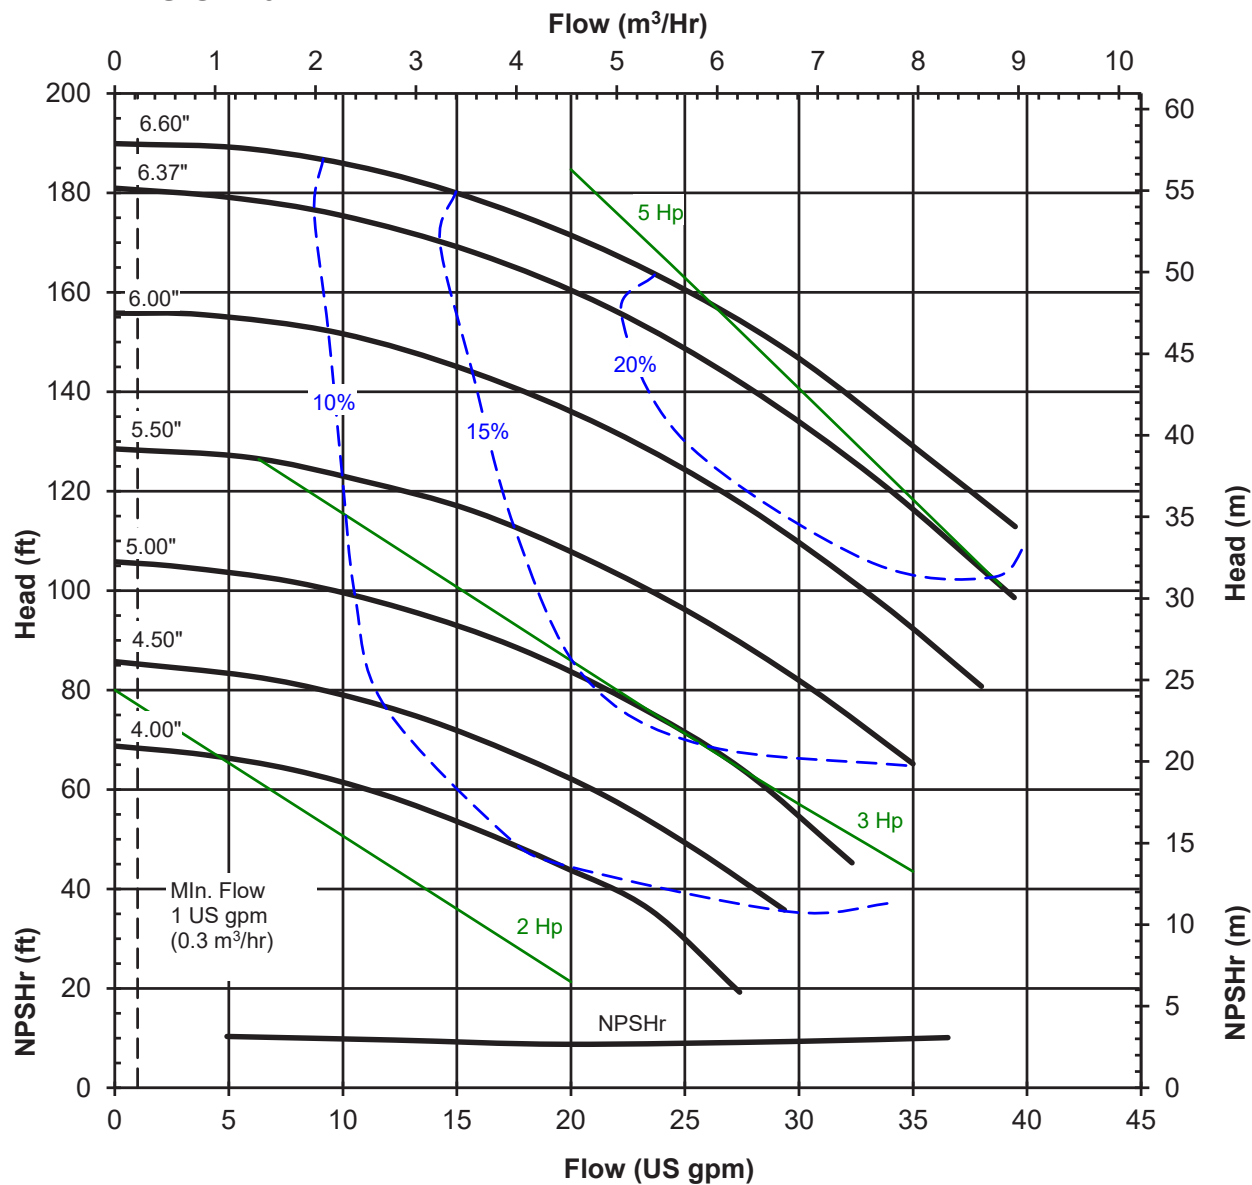


Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.25") between all curves



UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR1516L
1750 RPM, 30-Hz
Suction: 1.5" Flange
Discharge: 1" Flange
S.G. 1.0

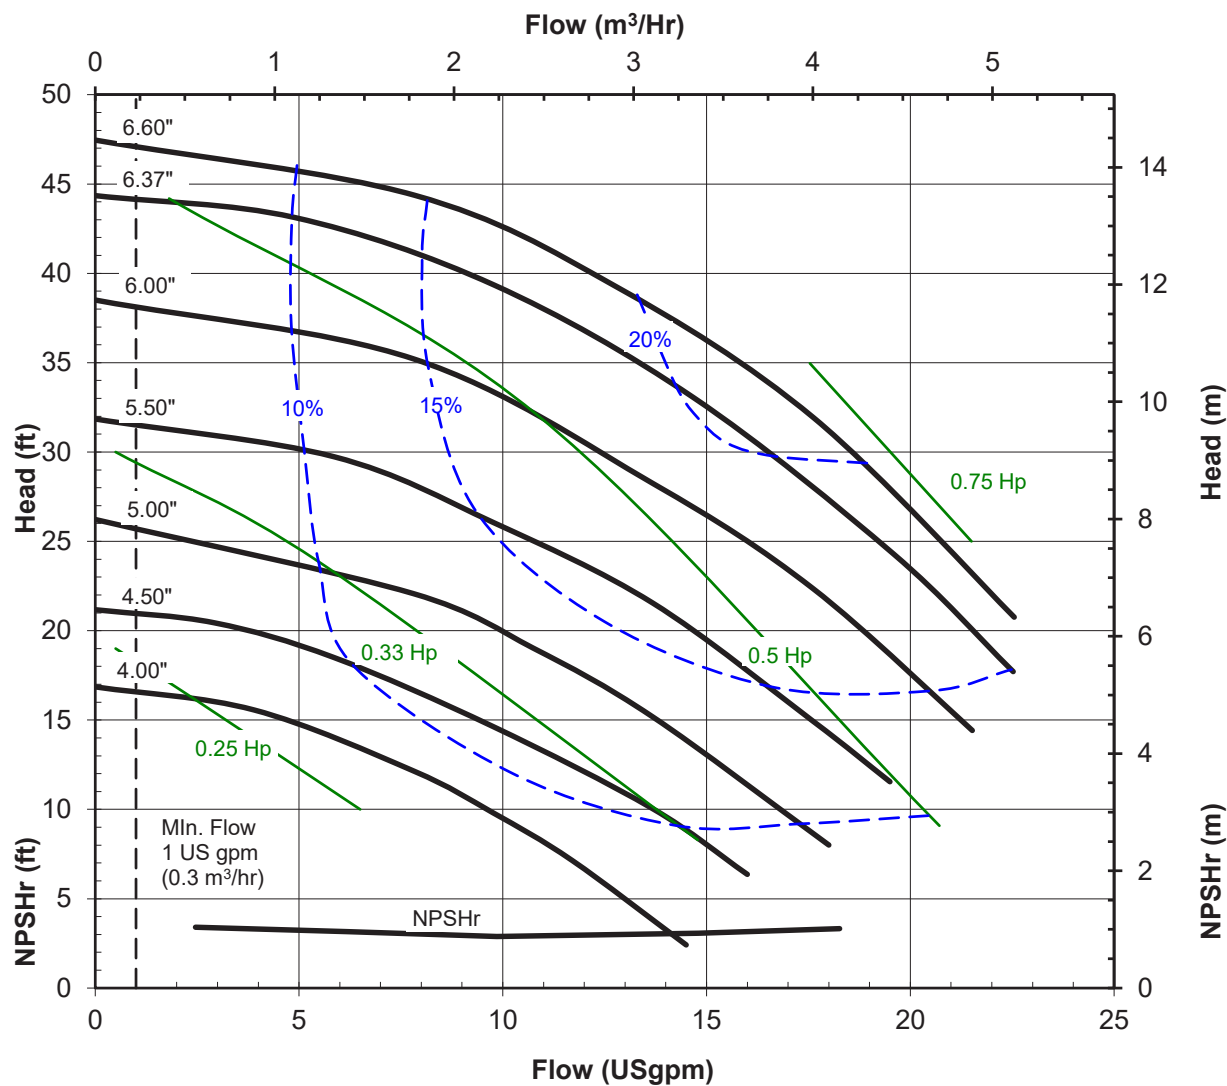

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.25") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR1516L
2900 RPM, 50-Hz
Suction: 1.5" Flange
Discharge: 1" Flange
S.G. 1.0

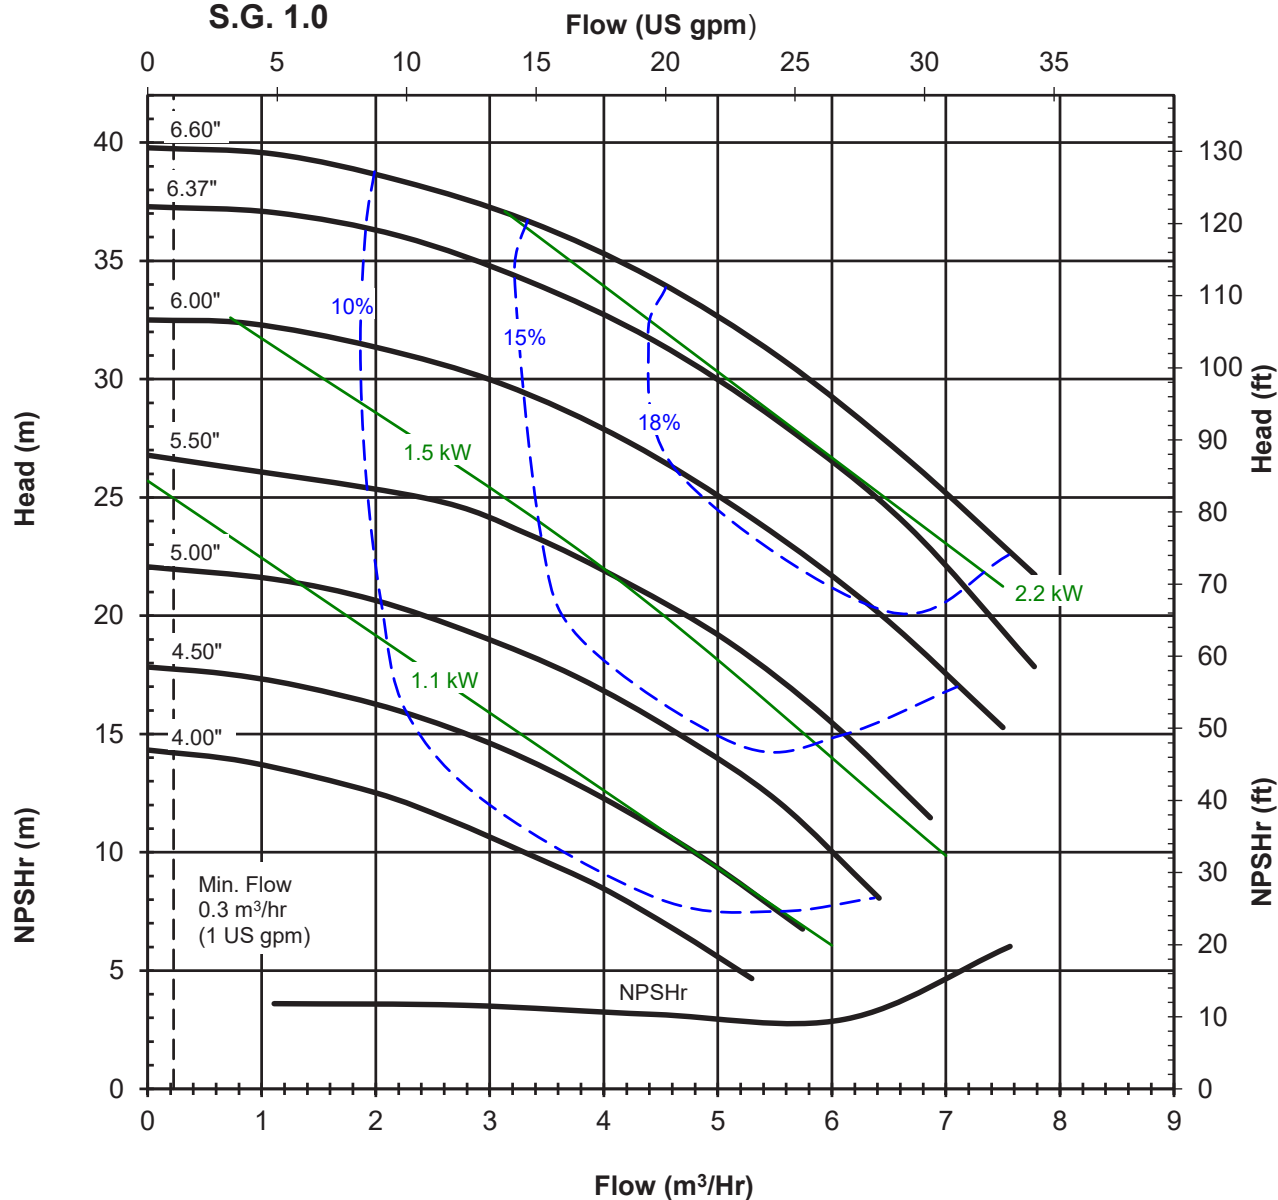

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.25") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR1516L
1450 RPM, 25-Hz
Suction: 1.5" Flange
Discharge: 1" Flange
S.G. 1.0

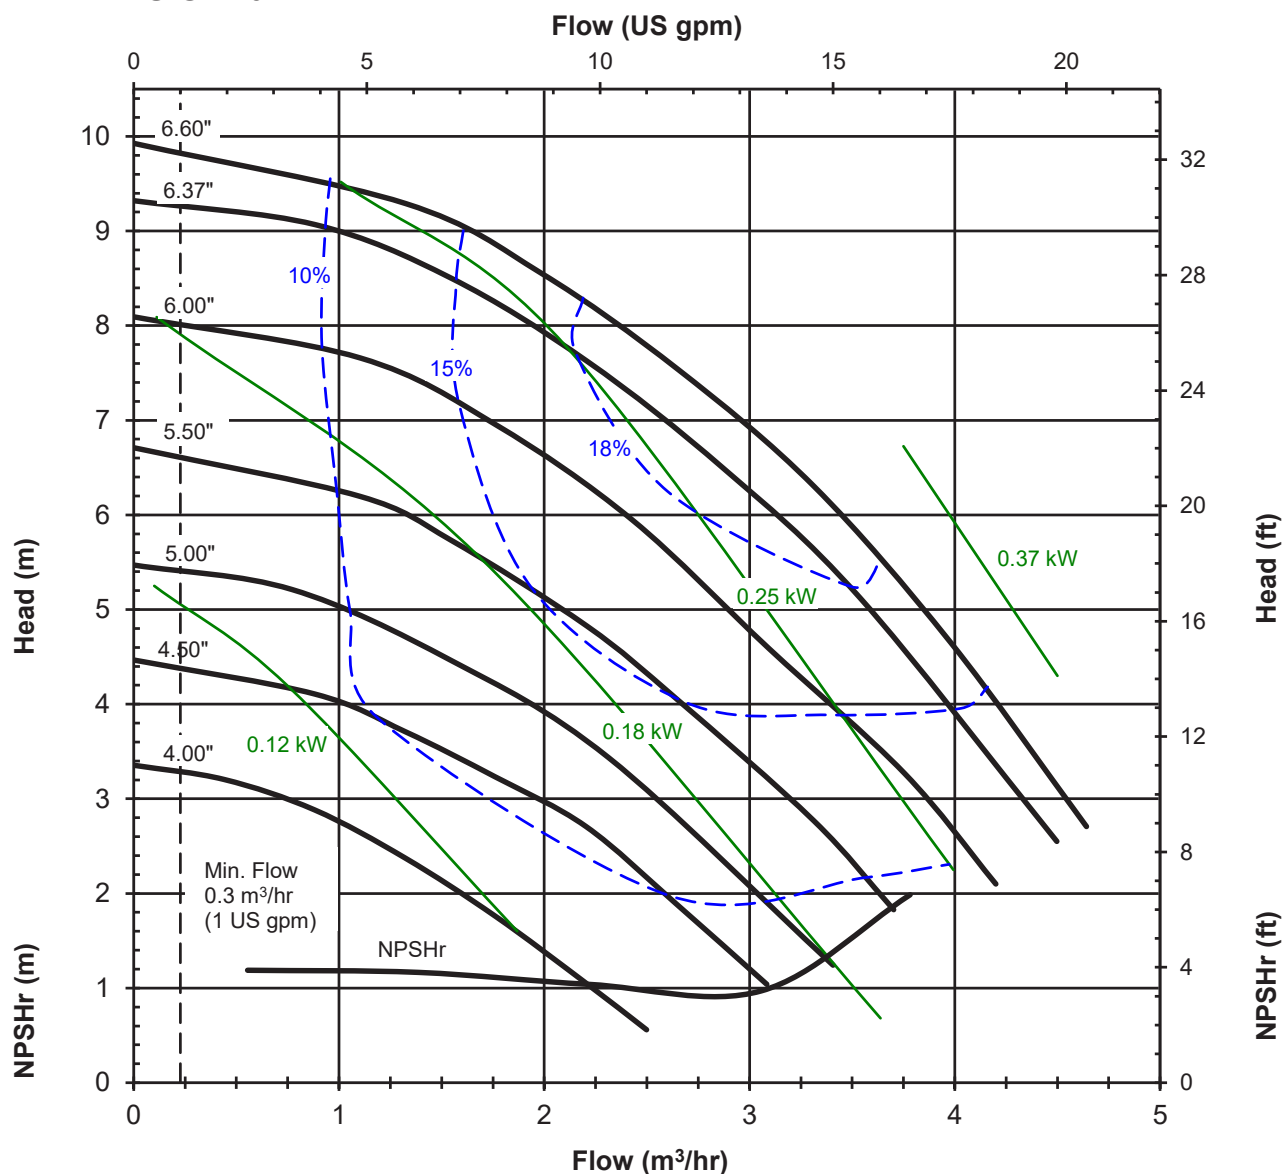

Impeller trims are available in 1/8" diameter increments (ex: 4.13", 6.25") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR1518
3500 RPM, 60-Hz
Suction: 1.5" Flange
Discharge: 1" Flange
S.G. 1.0

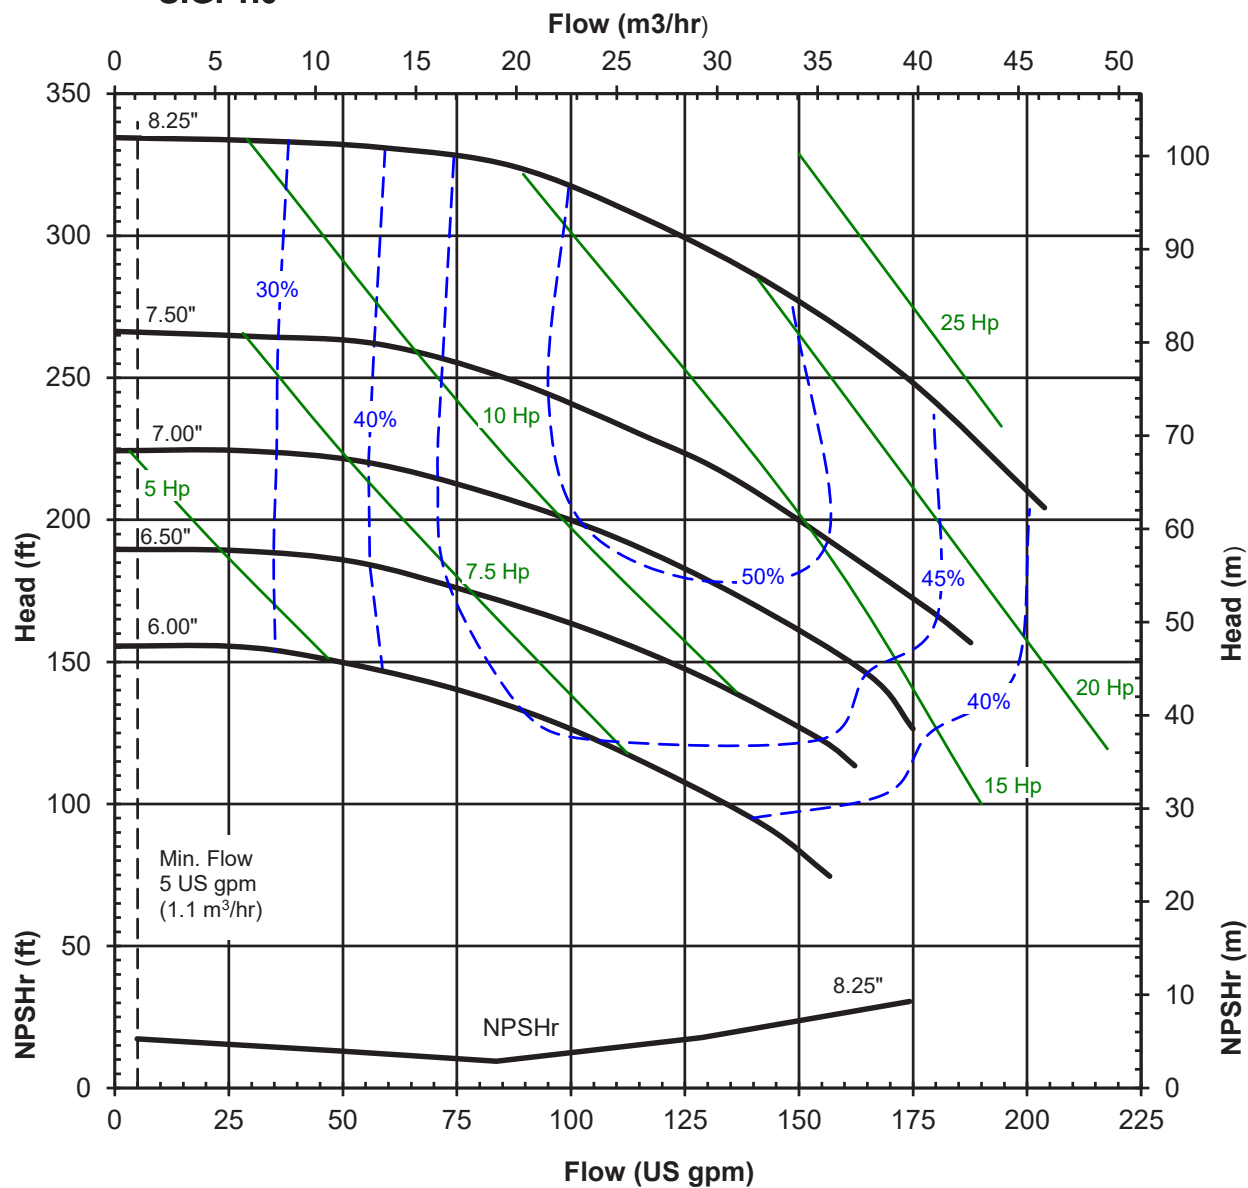


Impeller trims are available in 1/8" diameter increments (ex: 8.13", 6.88") between all curves



UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR1518
1750 RPM, 60-Hz
Suction: 1.5" Flange
Discharge: 1" Flange
S.G. 1.0

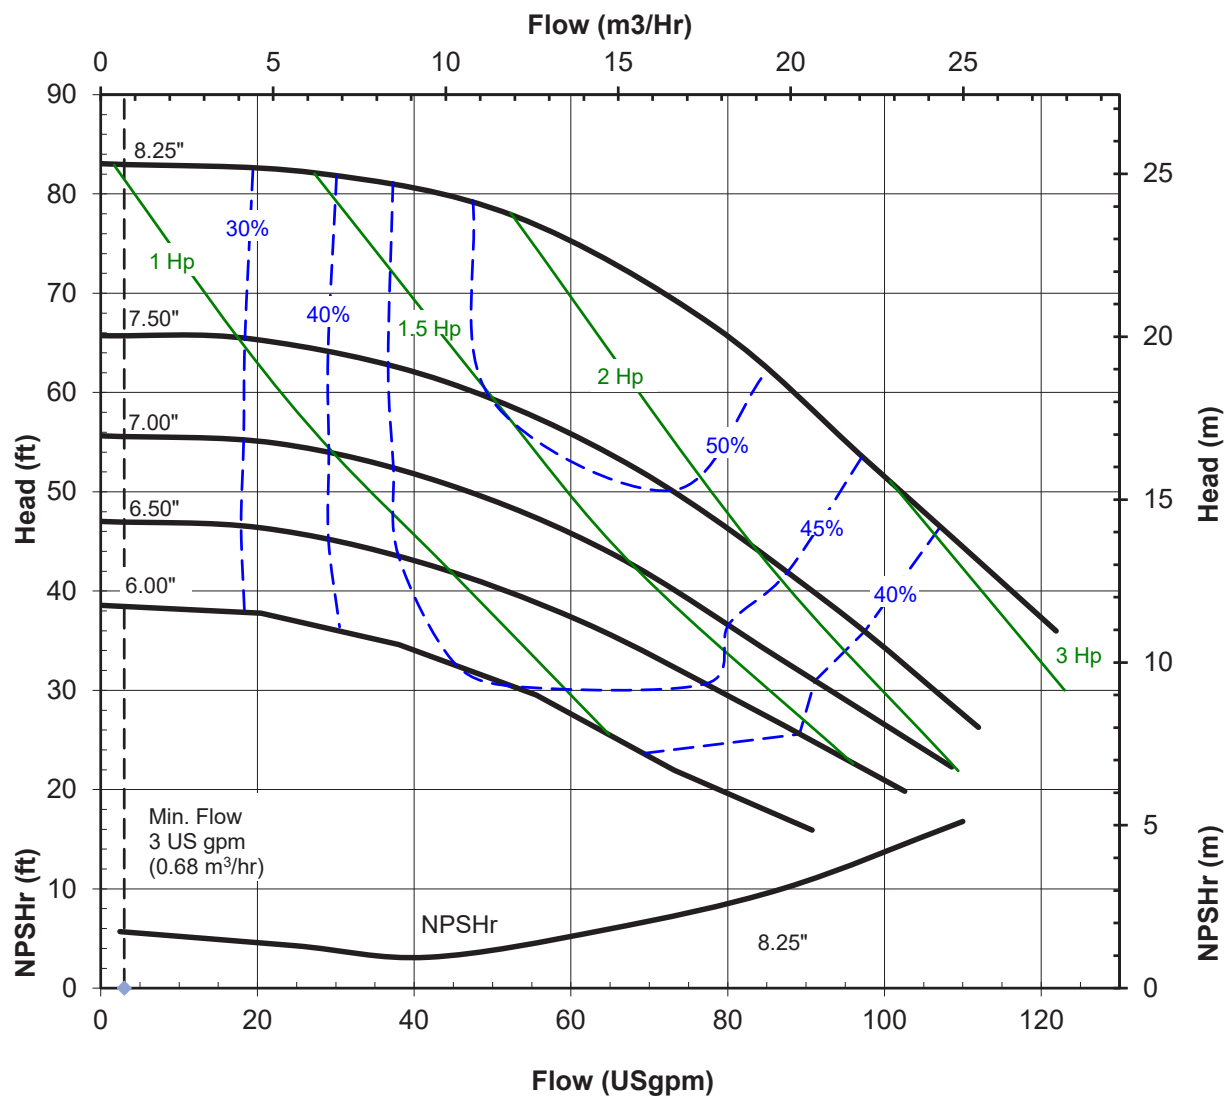

Impeller trims are available in 1/8" diameter increments (ex: 8.13", 6.88") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR1518
2900 RPM, 50-Hz
Suction: 1.5" Flange
Discharge: 1" Flange
S.G. 1.0

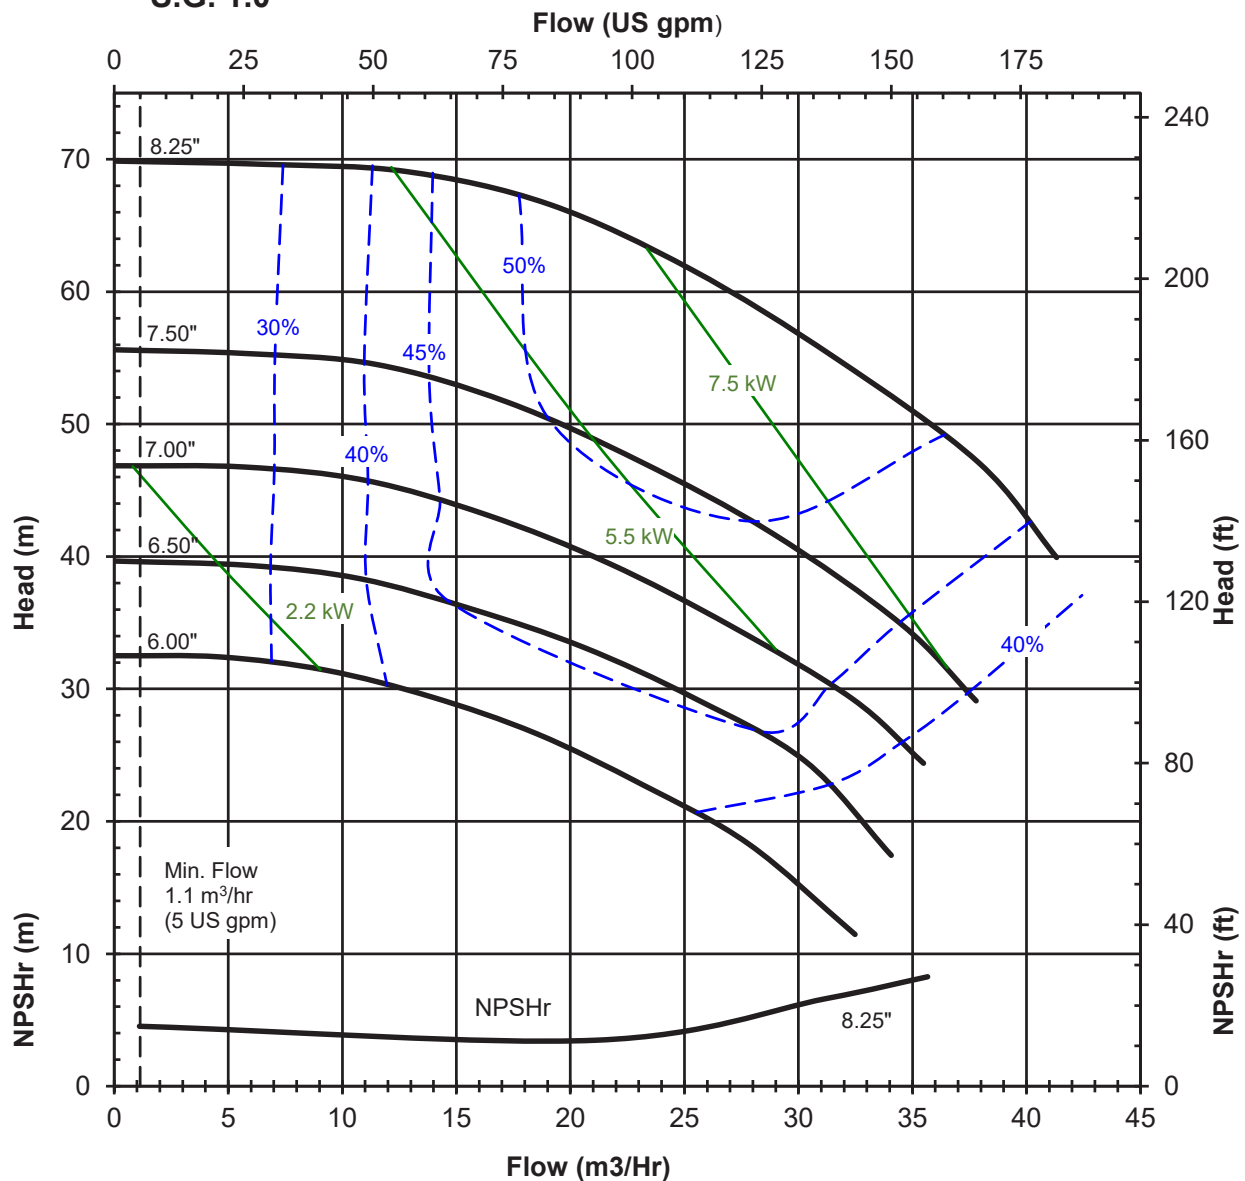

Impeller trims are available in 1/8" diameter increments (ex: 8.13", 6.88") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR1518
1450 RPM, 50-Hz
Suction: 1.5" Flange
Discharge: 1" Flange
S.G. 1.0

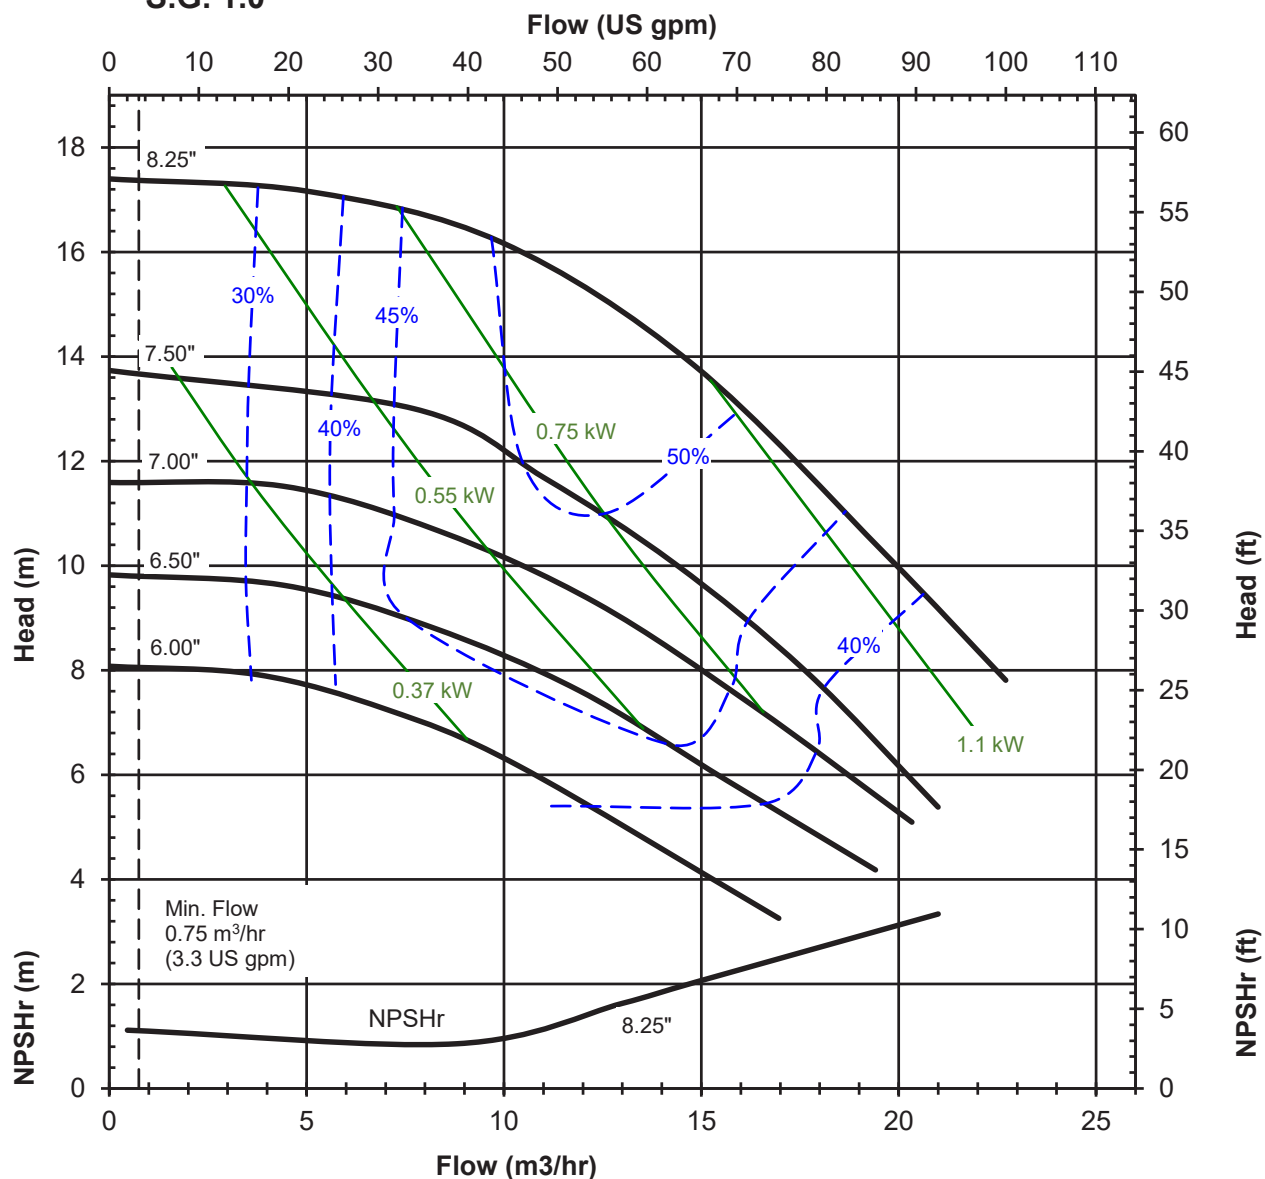

Impeller trims are available in 1/8" diameter increments (ex: 8.13", 6.88") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR1518L
3500 RPM, 60-Hz
Suction: 1.5" Flange
Discharge: 1" Flange
S.G. 1.0

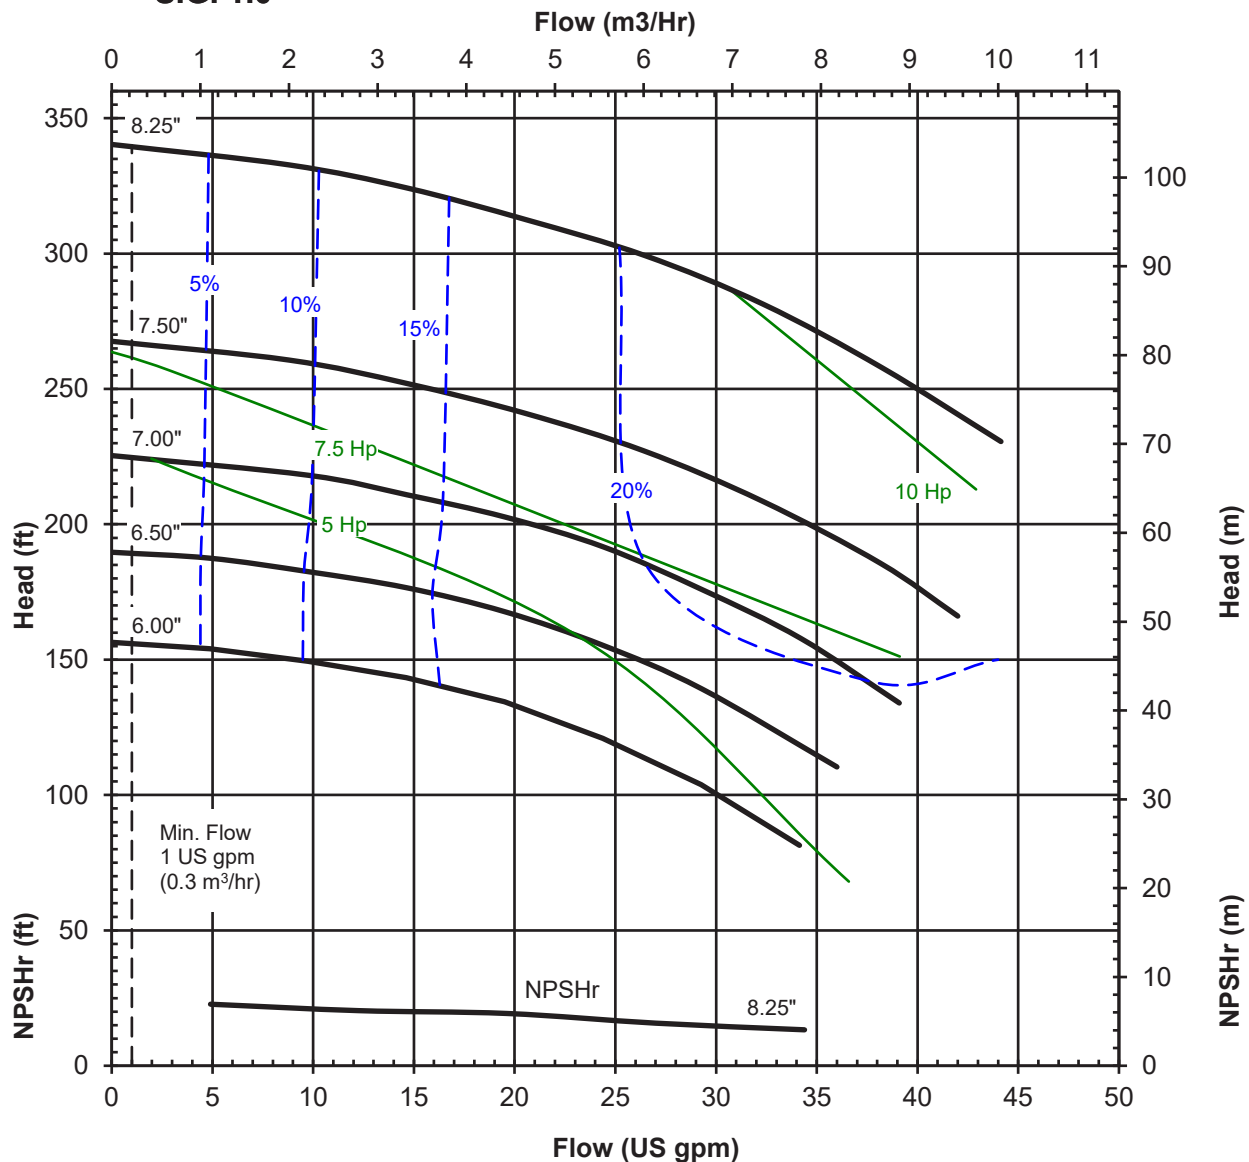


Impeller trims are available in 1/8" diameter increments (ex: 8.13", 6.88") between all curves



UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR1518L
1750 RPM, 30-Hz
Suction: 1.5" Flange
Discharge: 1" Flange
S.G. 1.0

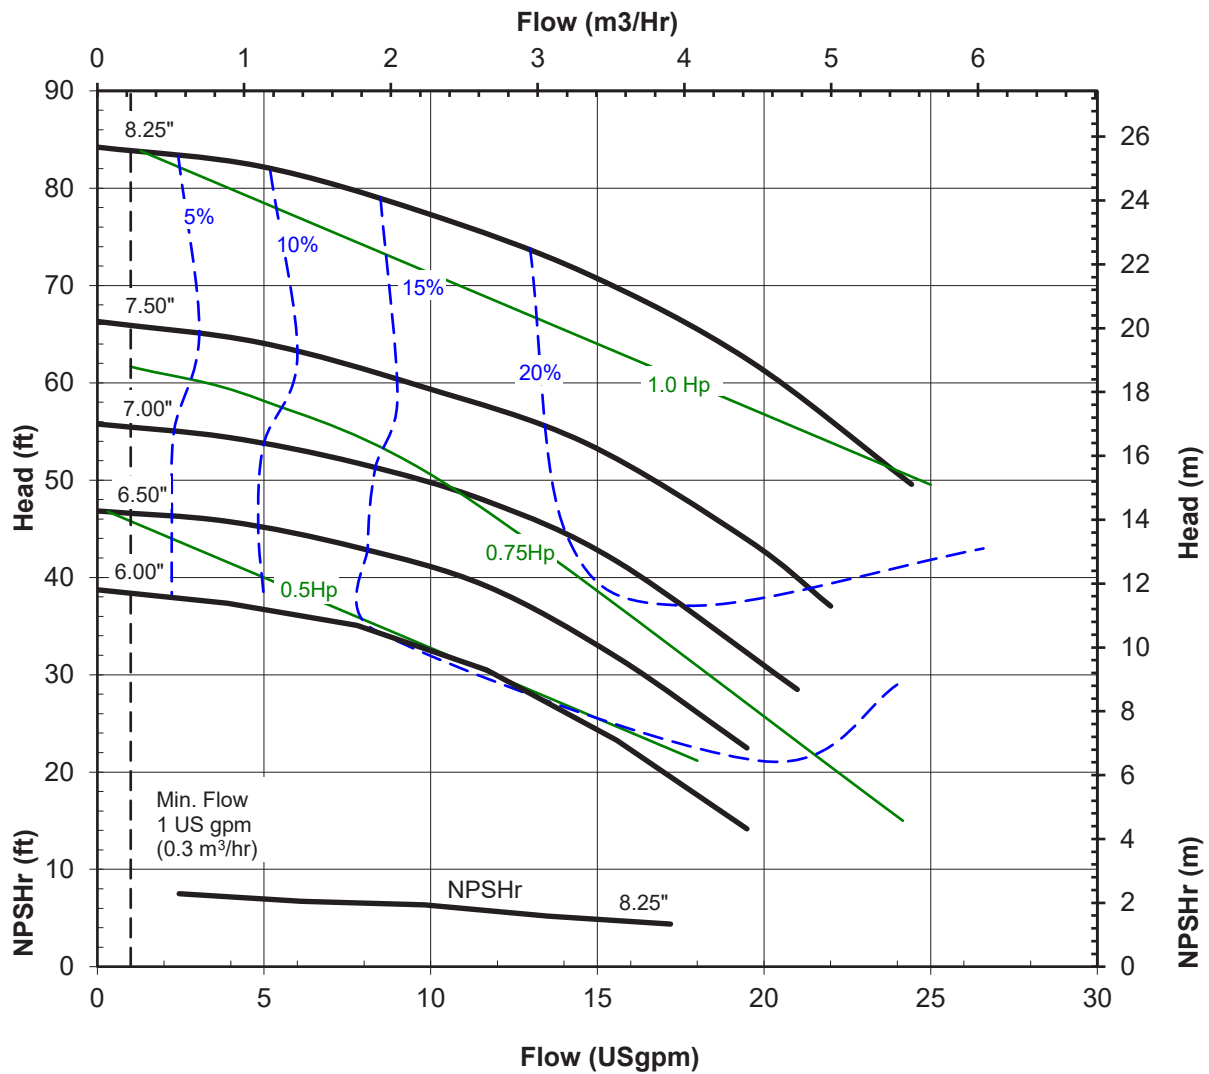

Impeller trims are available in 1/8" diameter increments (ex: 8.13", 6.88") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE

Model: R1518L
2900 RPM, 50-Hz
Suction: 1.5" Flange
Discharge: 1" Flange
S.G. 1.0

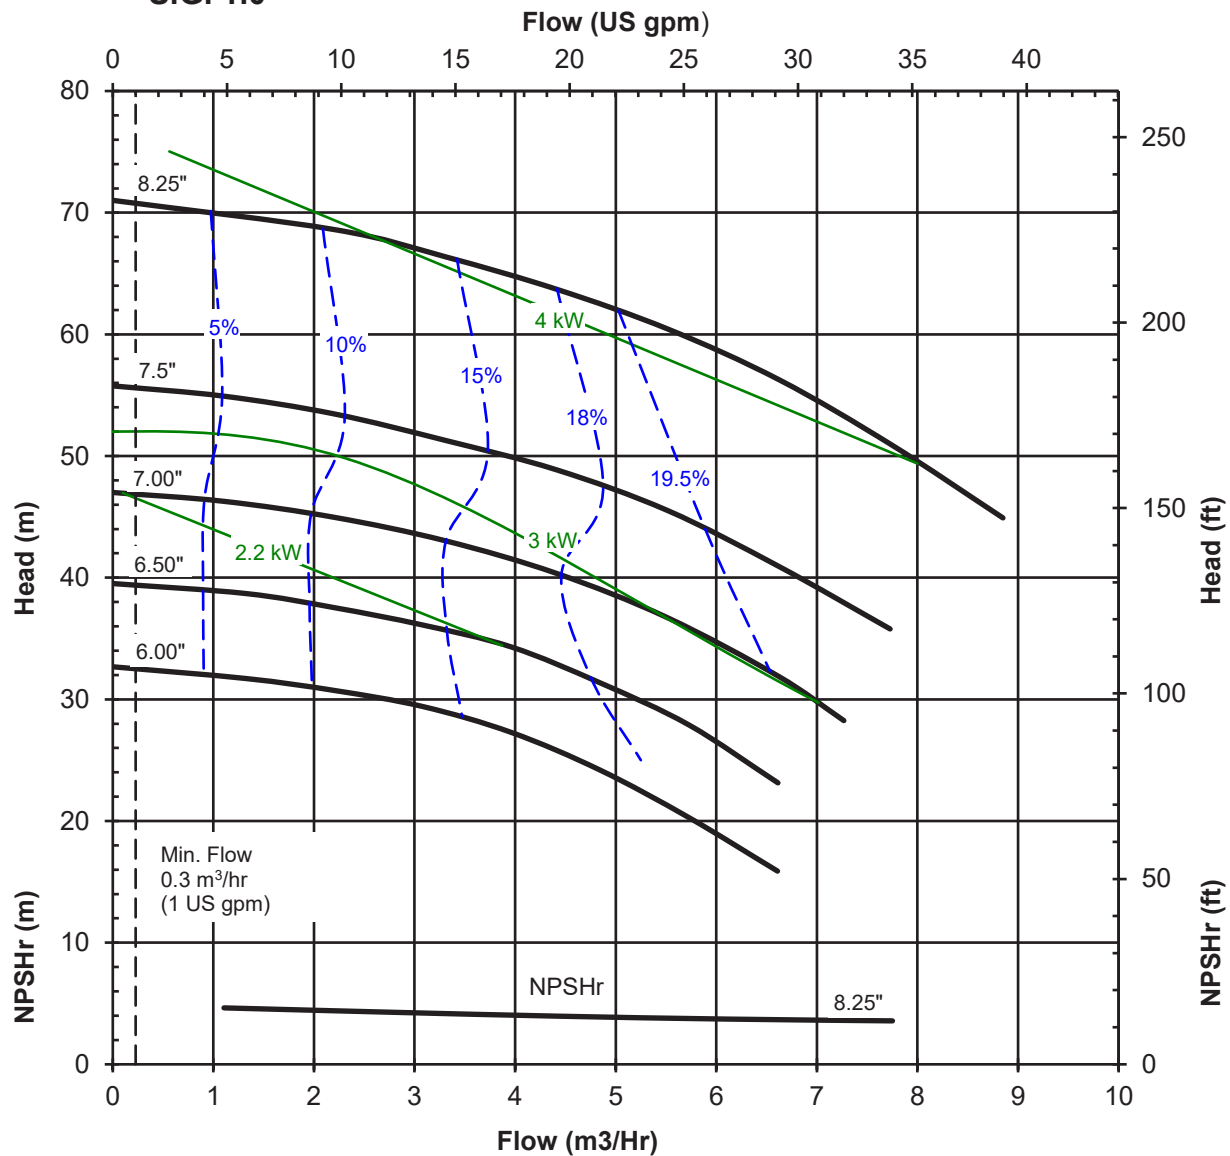


Impeller trims are available in 1/8" diameter increments (ex: 8.13", 6.88") between all curves



UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR1518L
1450 RPM, 25-Hz
Suction: 1.5" Flange
Discharge: 1" Flange
S.G. 1.0

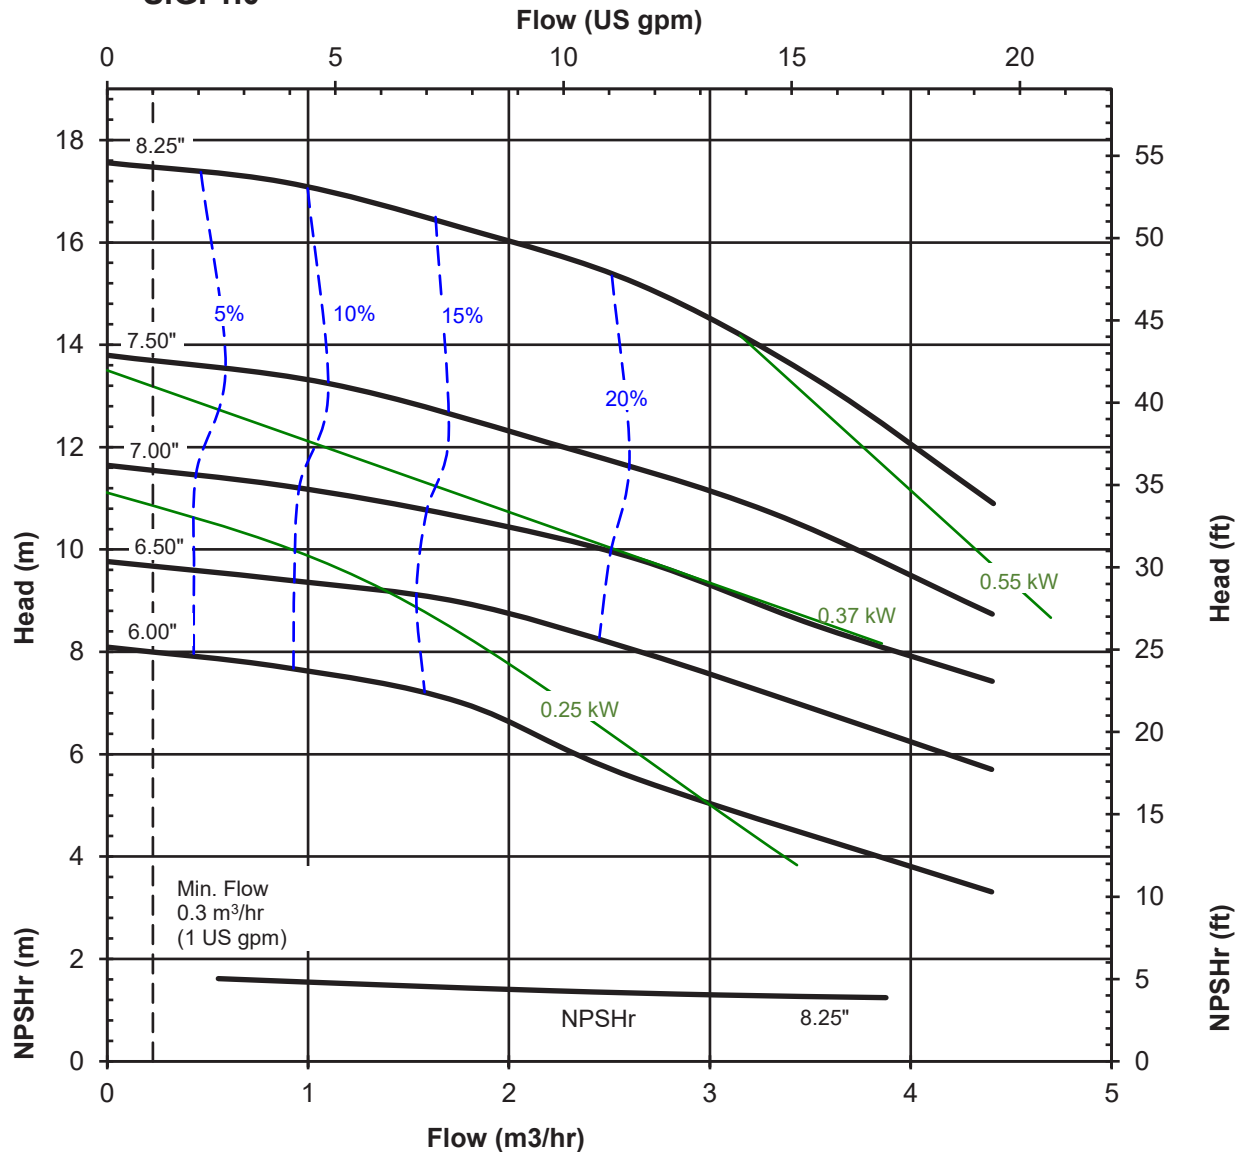

Impeller trims are available in 1/8" diameter increments (ex: 8.13", 6.88") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR2110
3500 RPM, 60-Hz
Suction: 2" Flange
Discharge: 1" Flange
S.G. 1.0

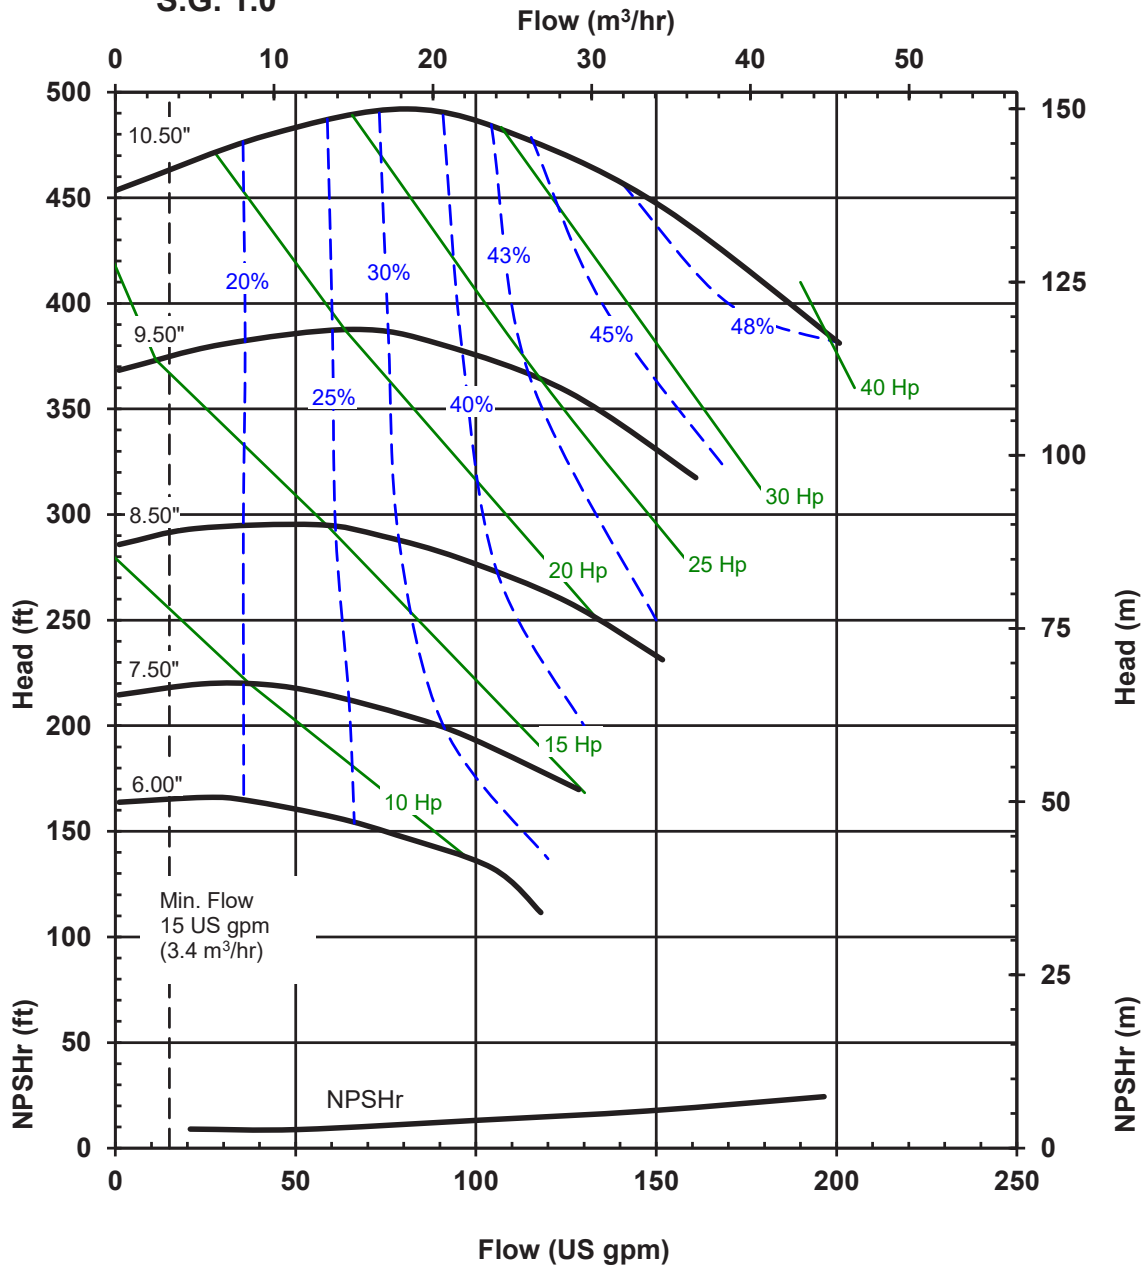

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 10.37") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR2110
1750 RPM, 60-Hz
Suction: 2" Flange
Discharge: 1" Flange
S.G. 1.0

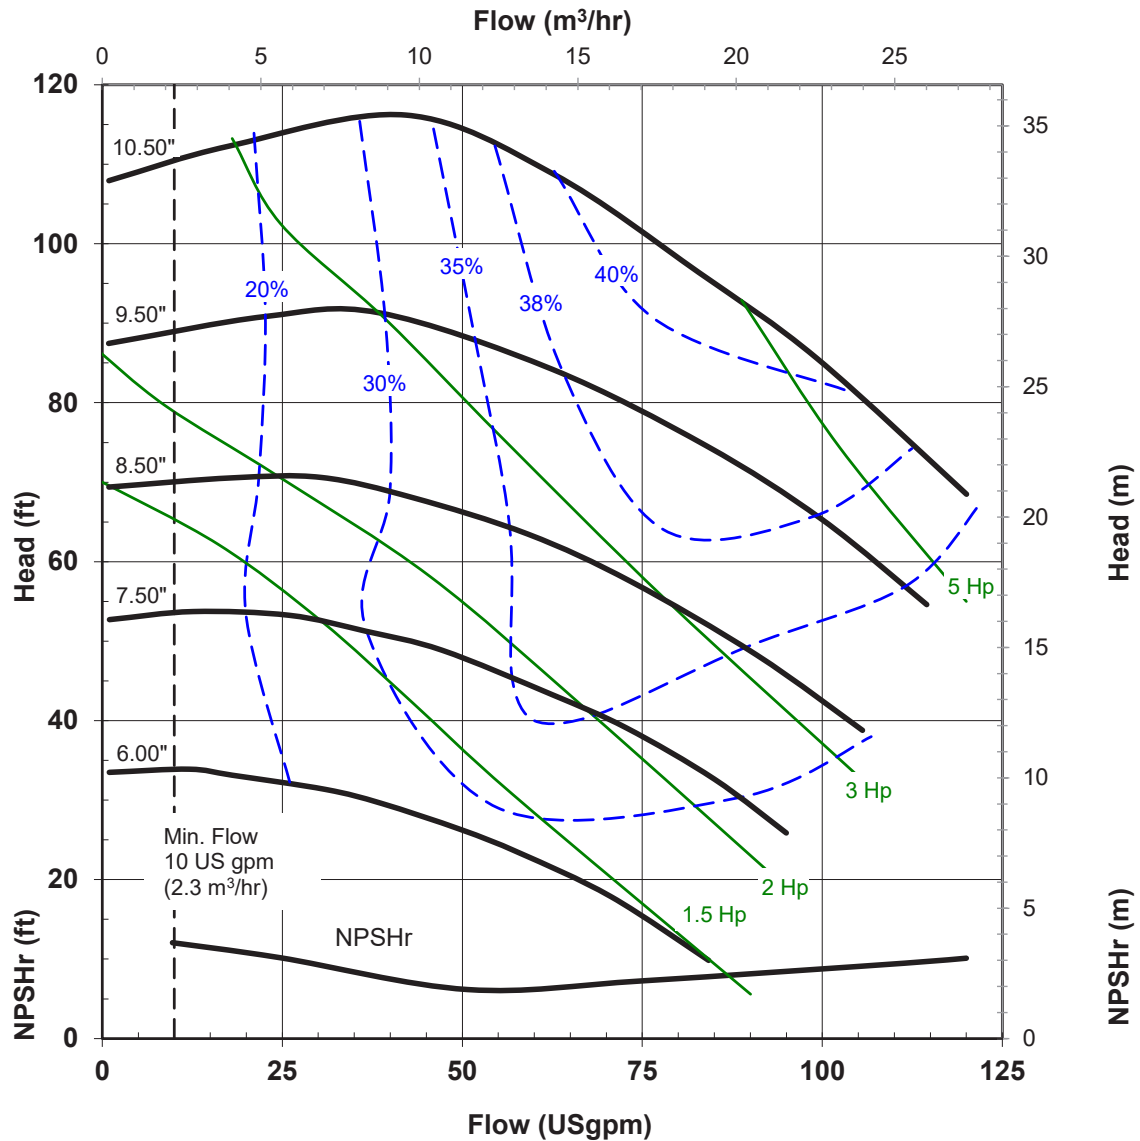

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 10.37") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR2110
2900 RPM, 50-Hz
Suction: 2" Flange
Discharge: 1" Flange
S.G. 1.0

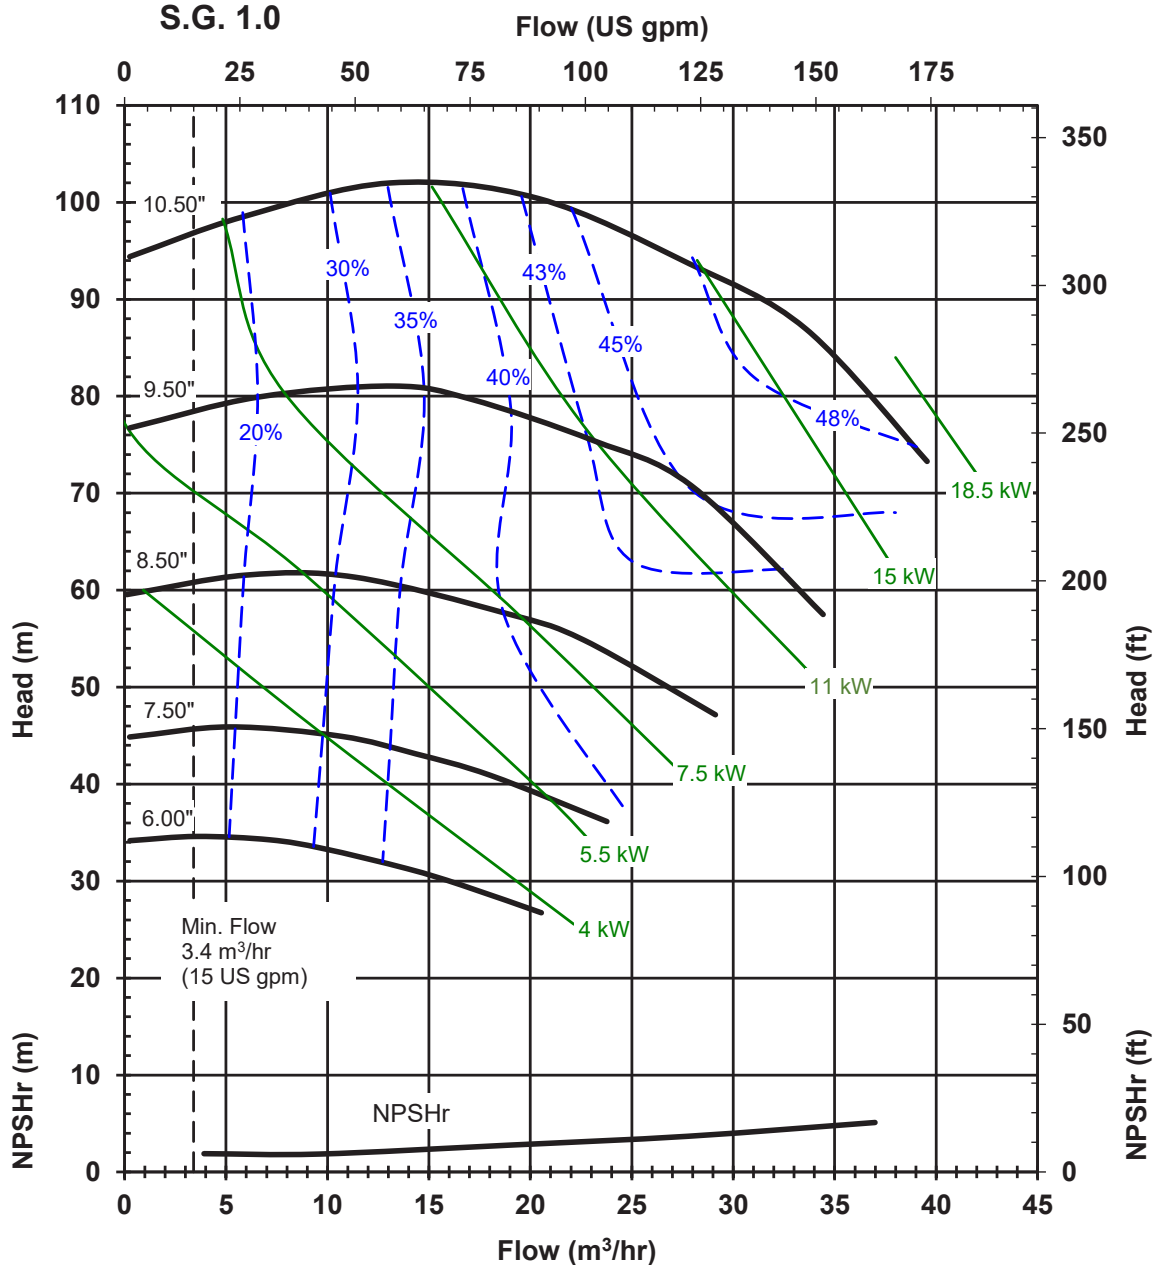

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 4.13") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR2110
1450 RPM, 50-Hz
Suction: 2" Flange
Discharge: 1" Flange
S.G 1.0

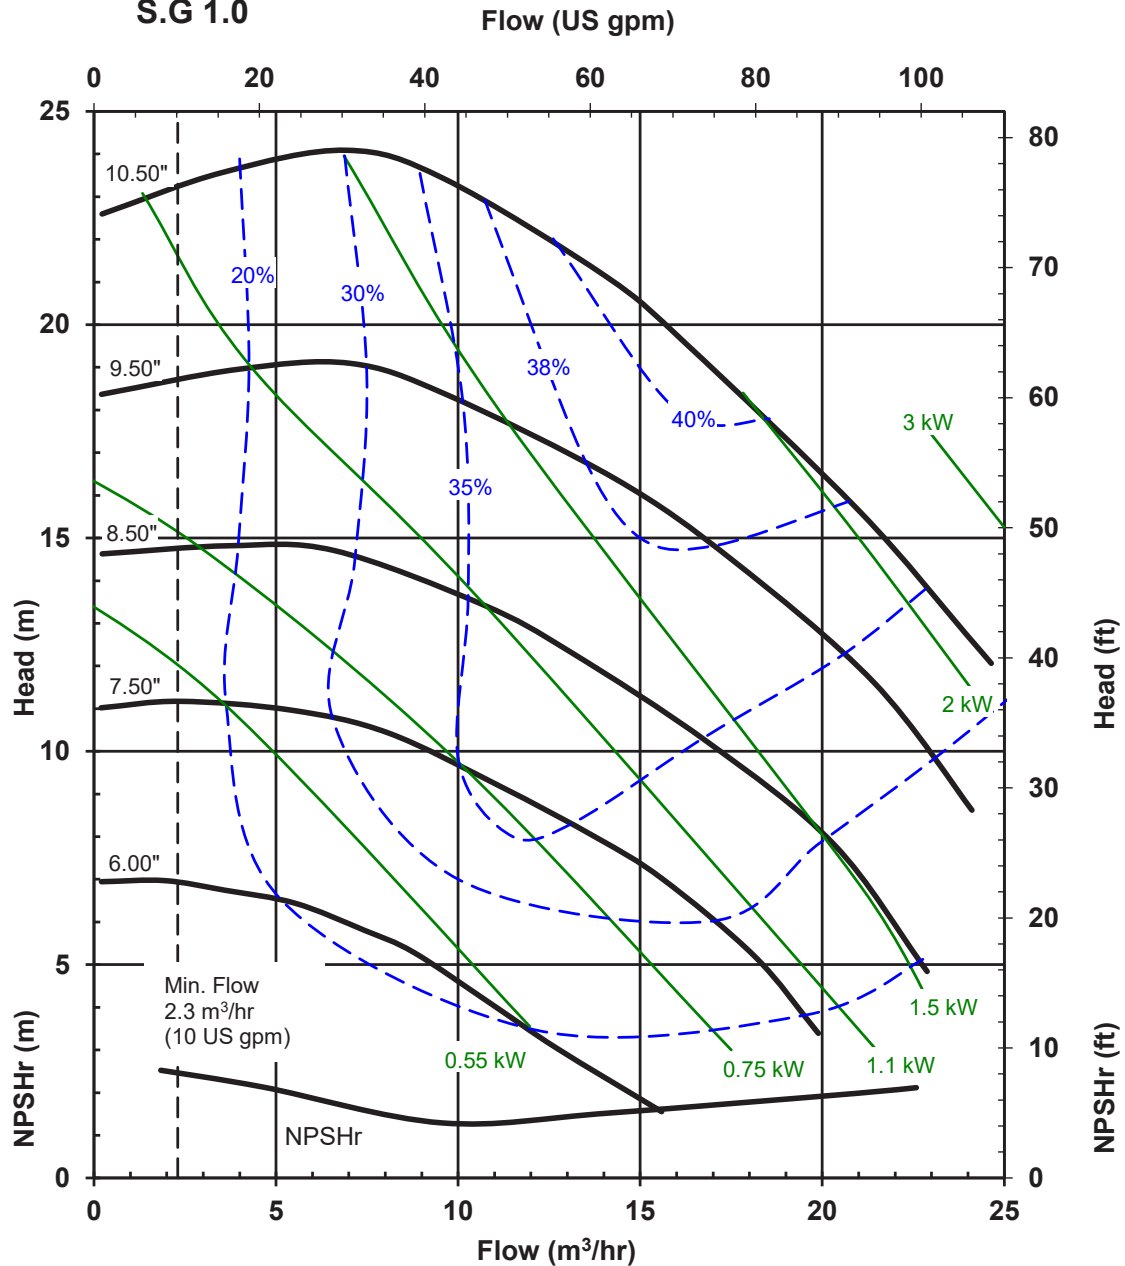


Impeller trims are available in 1/8" diameter increments (ex: 6.13", 10.37") between all curves.



UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR2110L
3500 RPM, 60-Hz
Suction: 2" Flange
Discharge: 1" Flange
S.G. 1.0

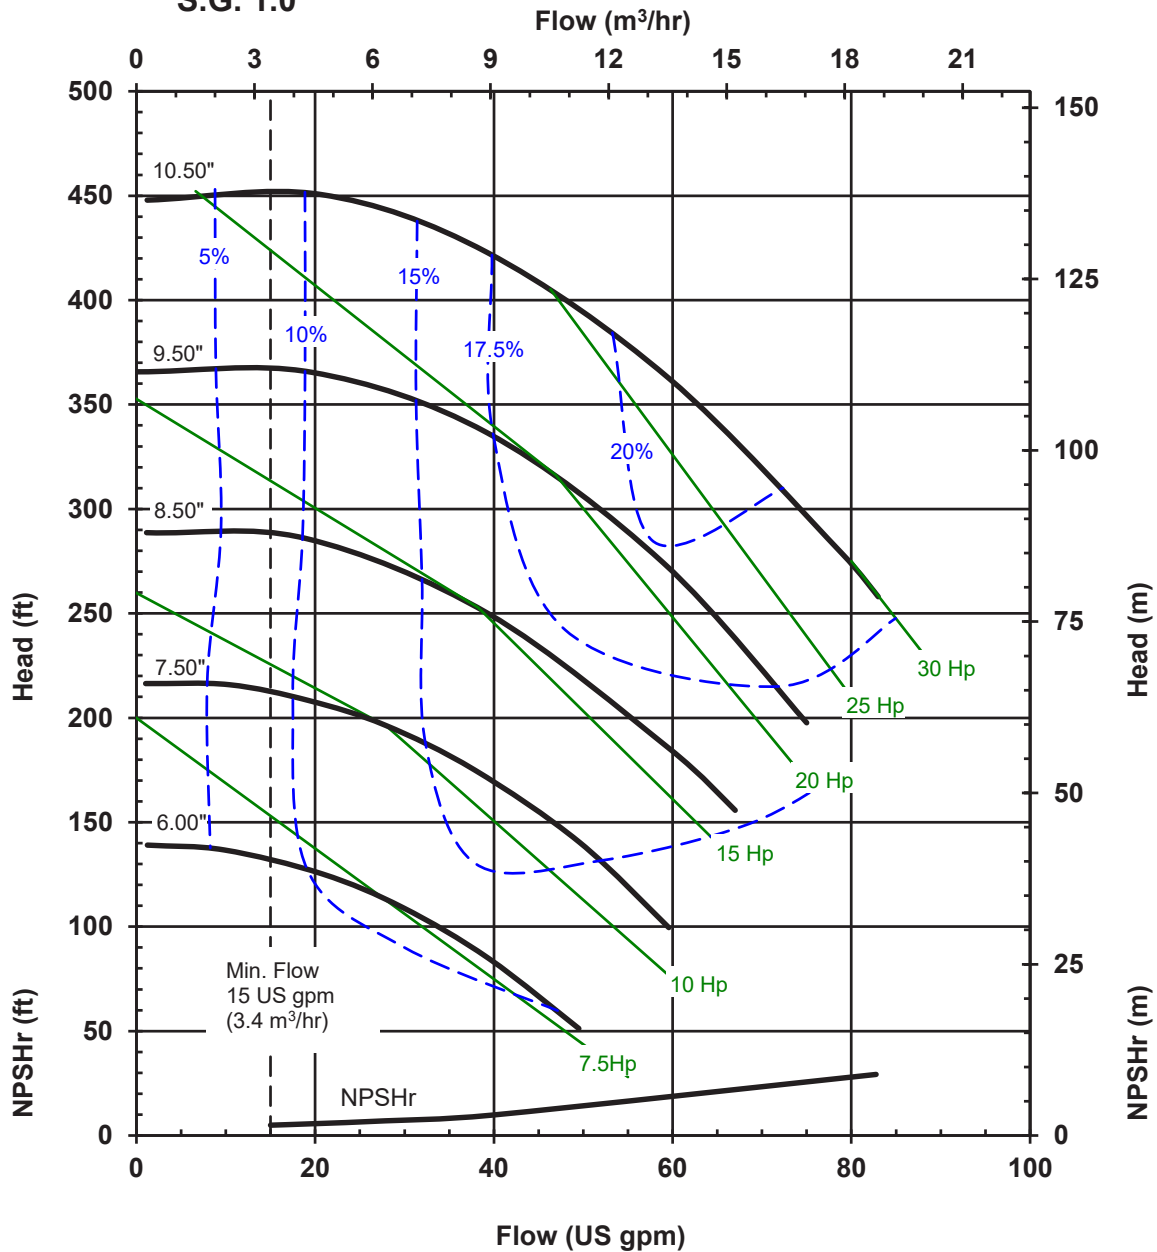

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 10.37") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR2110L
1750 RPM, 60-Hz
Suction: 2" Flange
Discharge: 1" Flange
S.G. 1.0

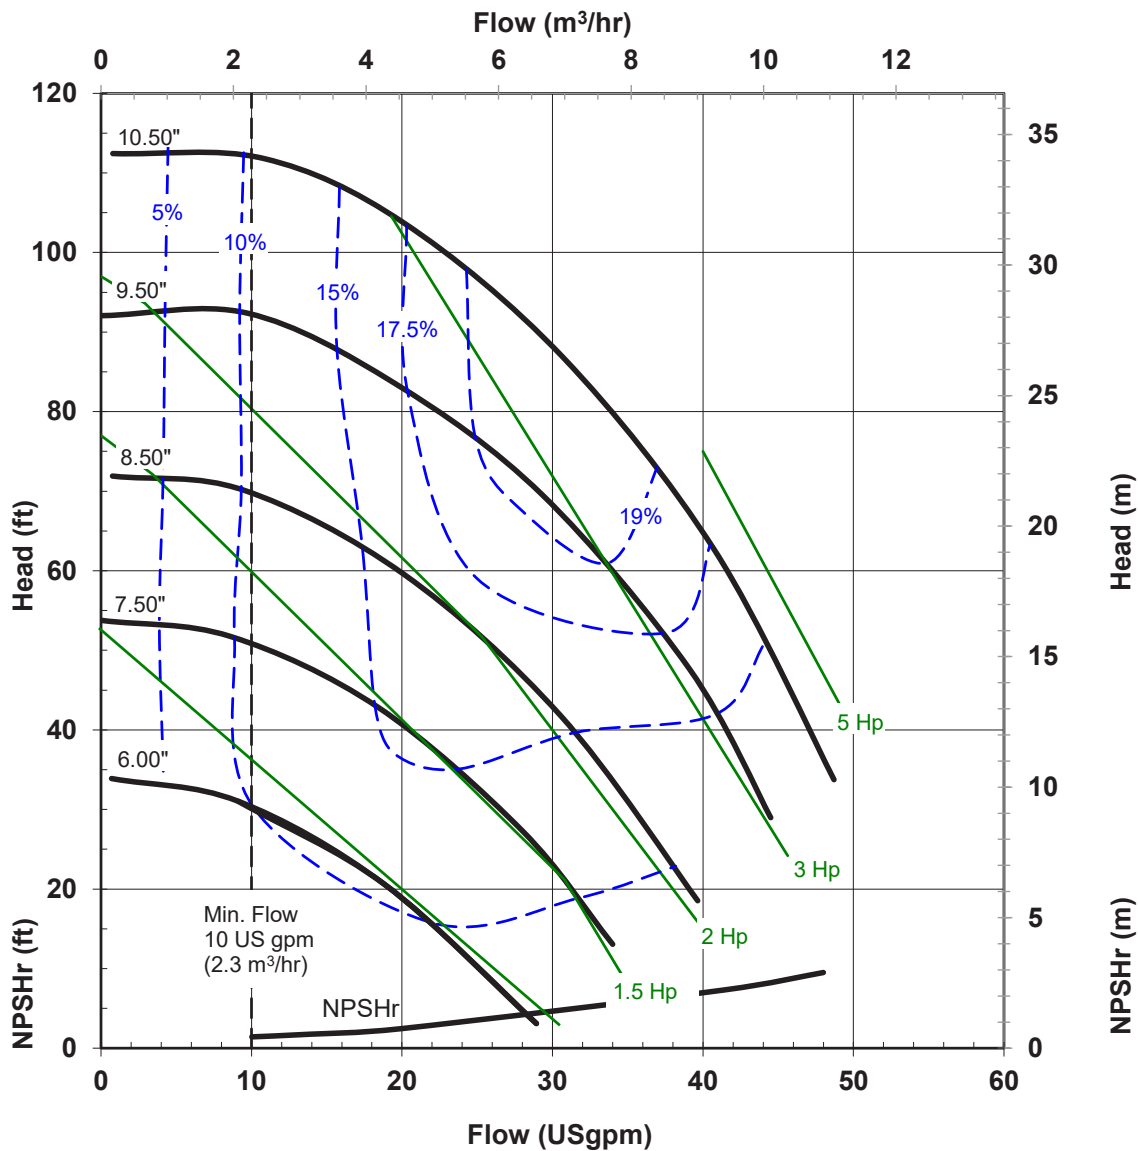

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 10.37") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR2110L
2900 RPM, 50-Hz
Suction: 2" Flange
Discharge: 1" Flange
S.G. 1.0

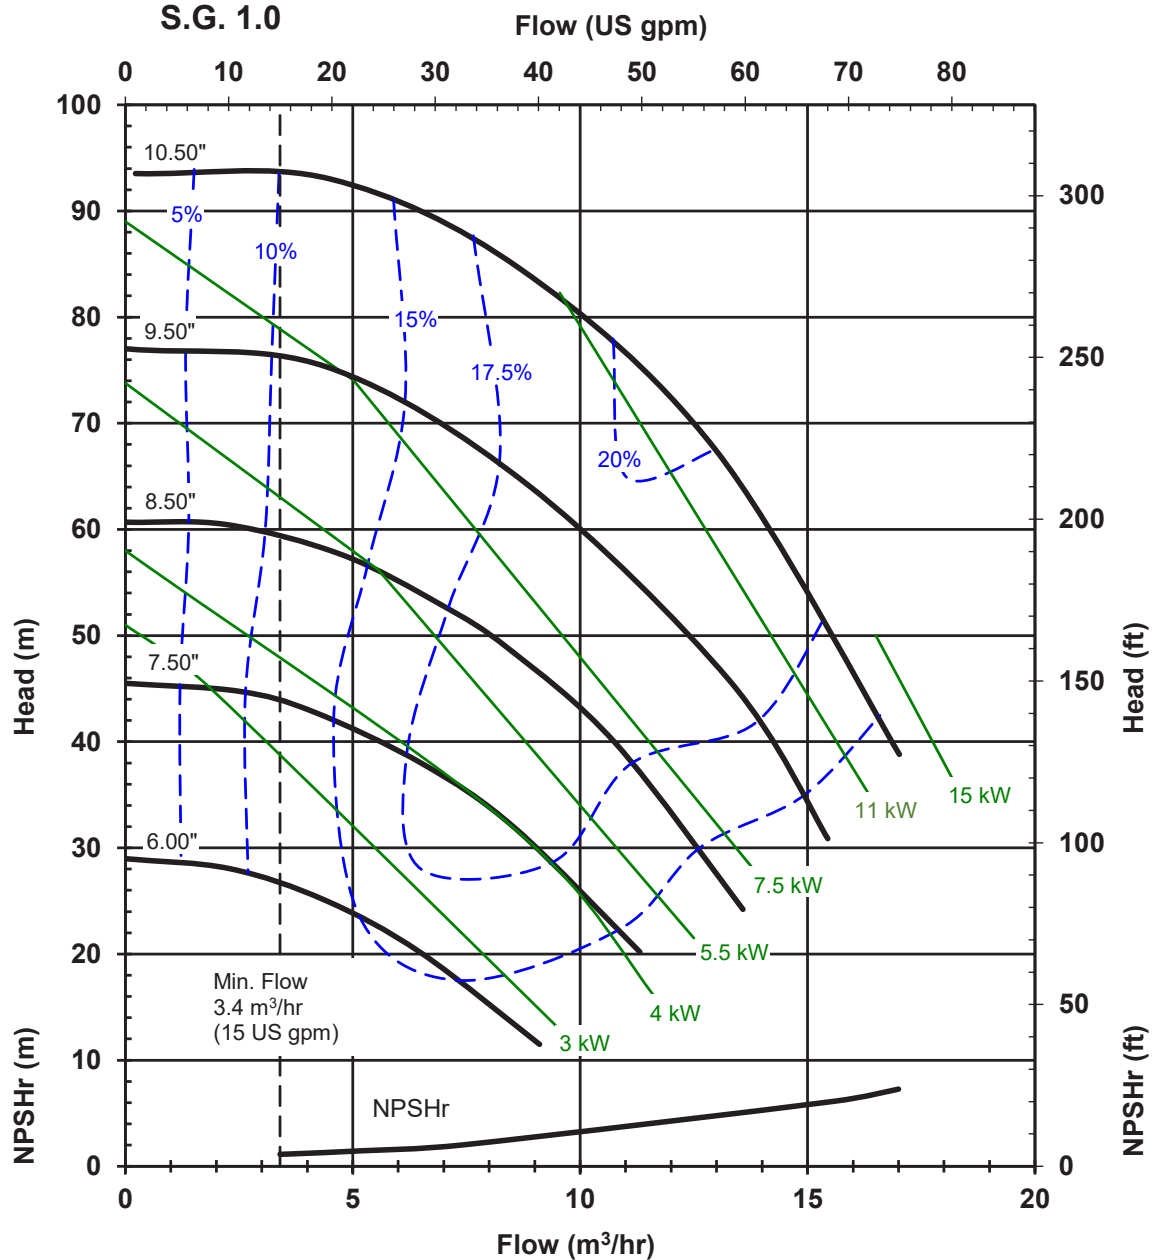

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 10.37") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR2110L
1450 RPM, 50-Hz
Suction: 2" Flange
Discharge: 1" Flange
S.G 1.0

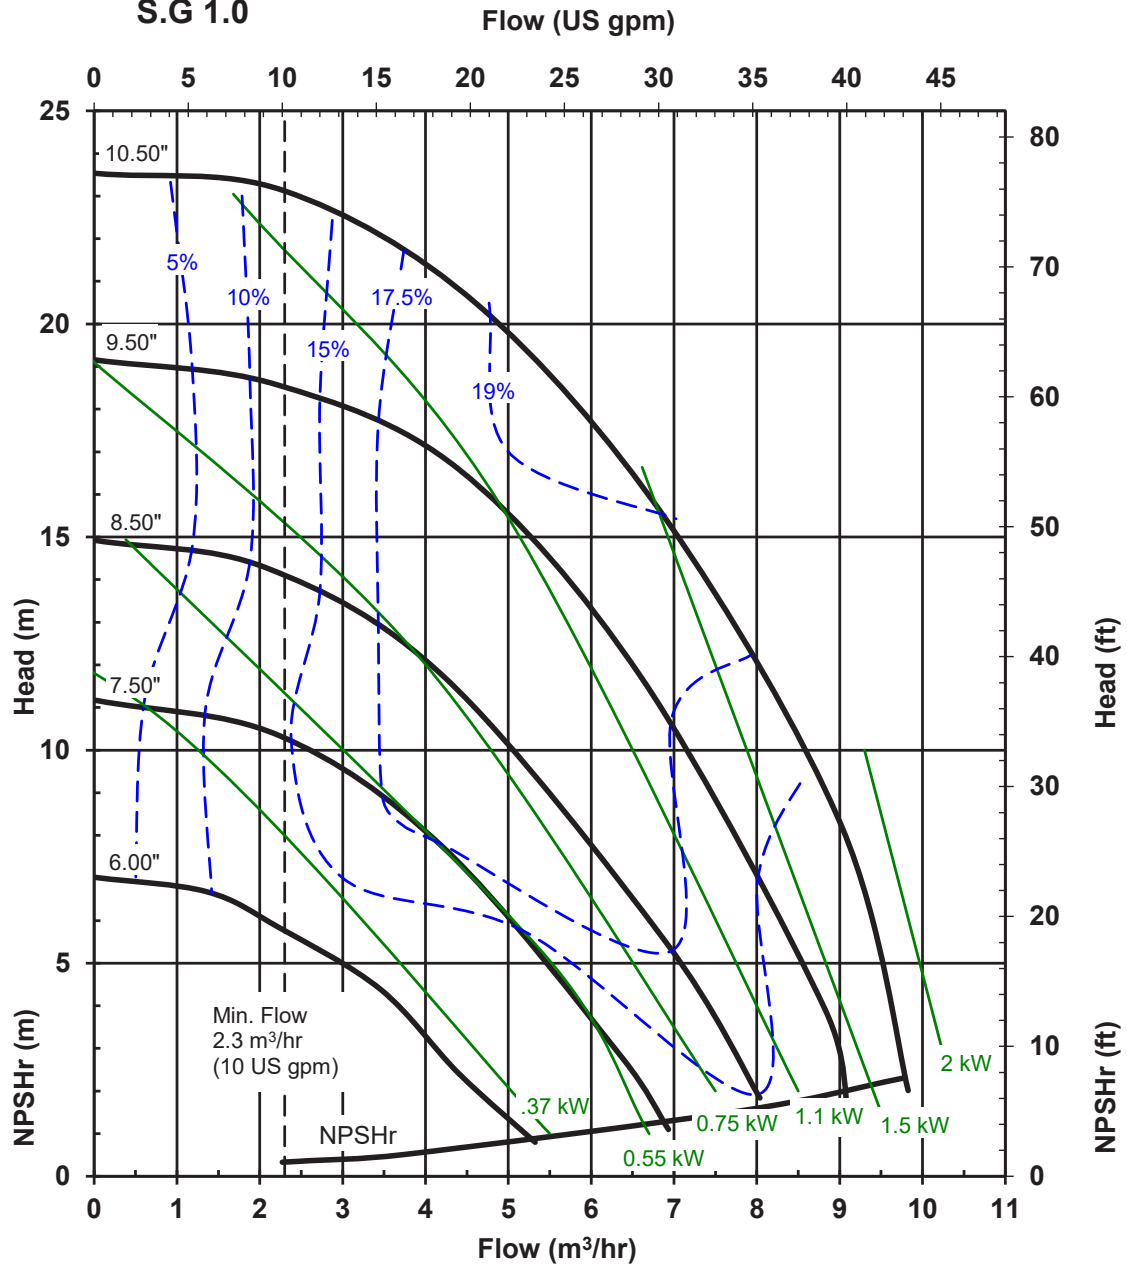


Impeller trims are available in 1/8" diameter increments (ex: 6.13", 10.37") between all curves.



UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR3110
3500 RPM, 60-Hz
Suction: 3" Flange
Discharge: 1" Flange
S.G. 1.0

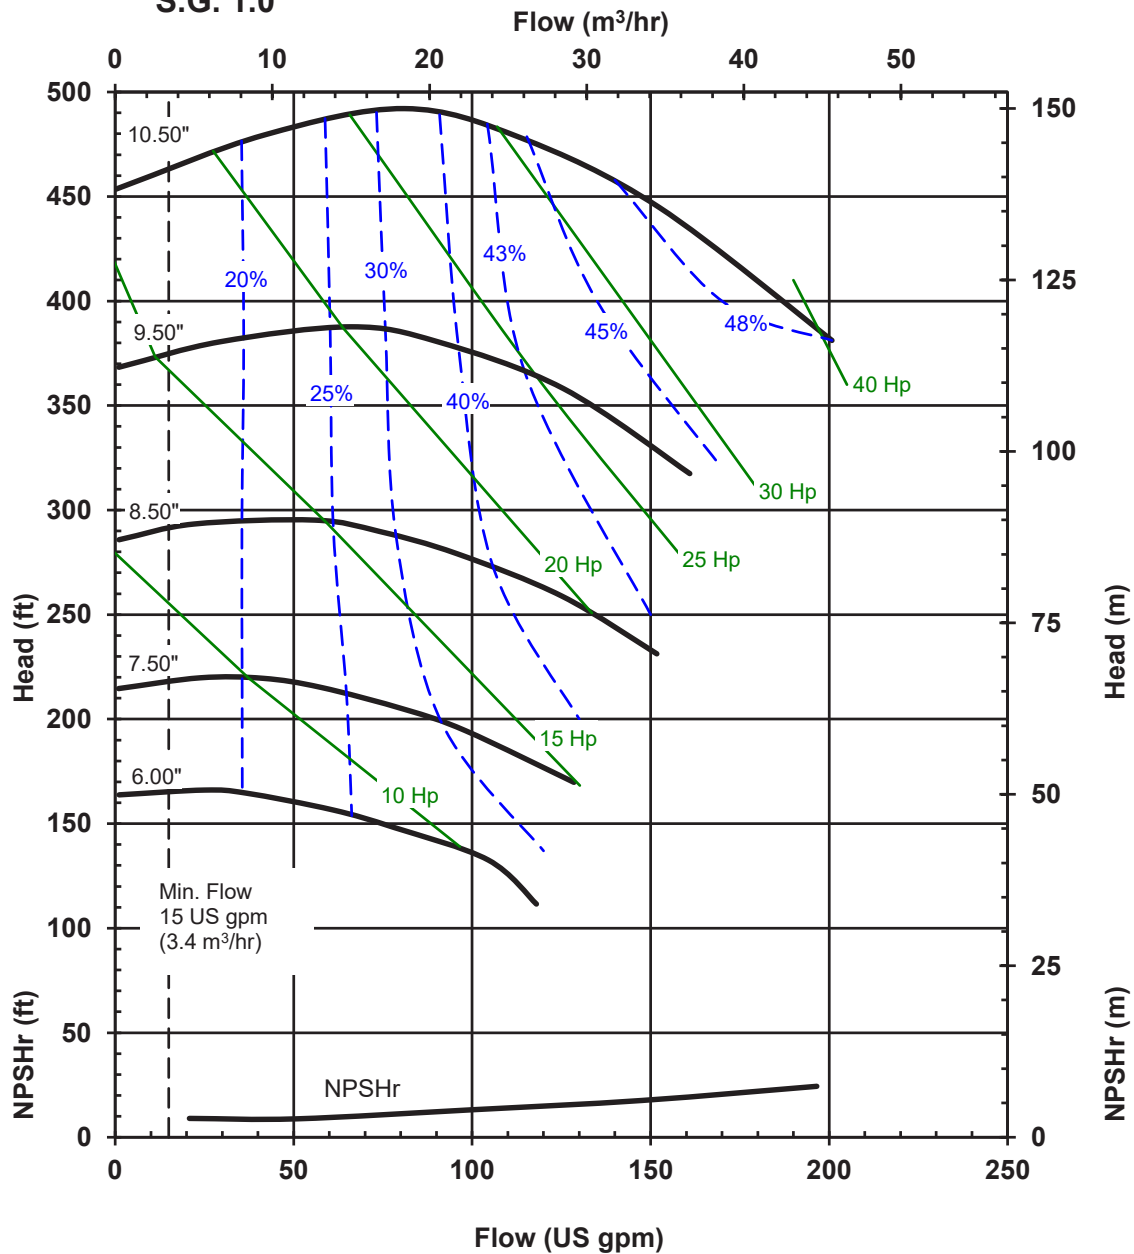

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 10.37") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR3110
1750 RPM, 60-Hz
Suction: 3" Flange
Discharge: 1" Flange
S.G. 1.0

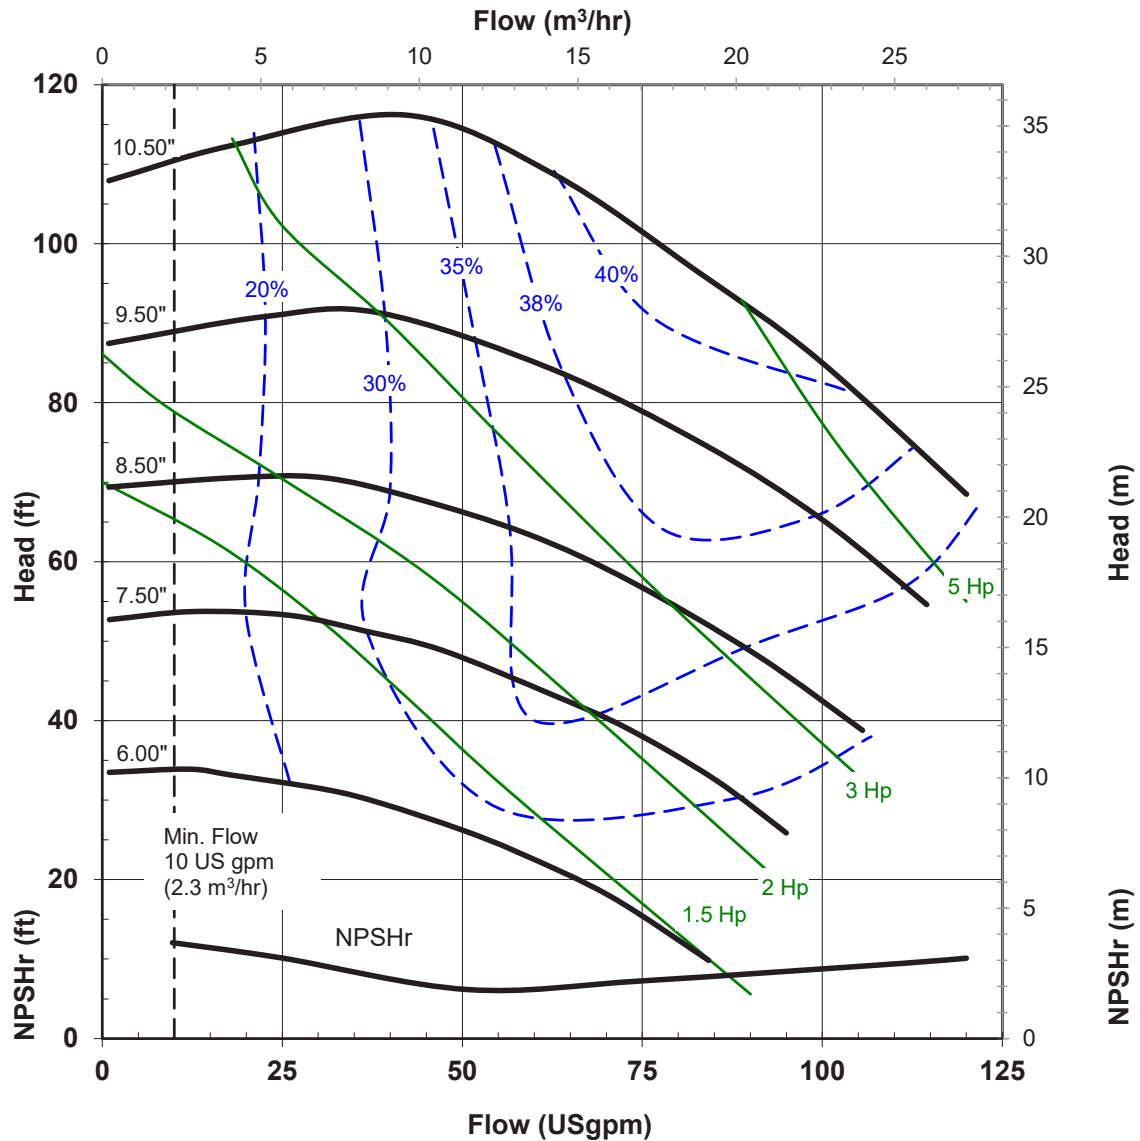

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 10.37") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR3110
2900 RPM, 50-Hz
Suction: 3" Flange
Discharge: 1" Flange
S.G. 1.0

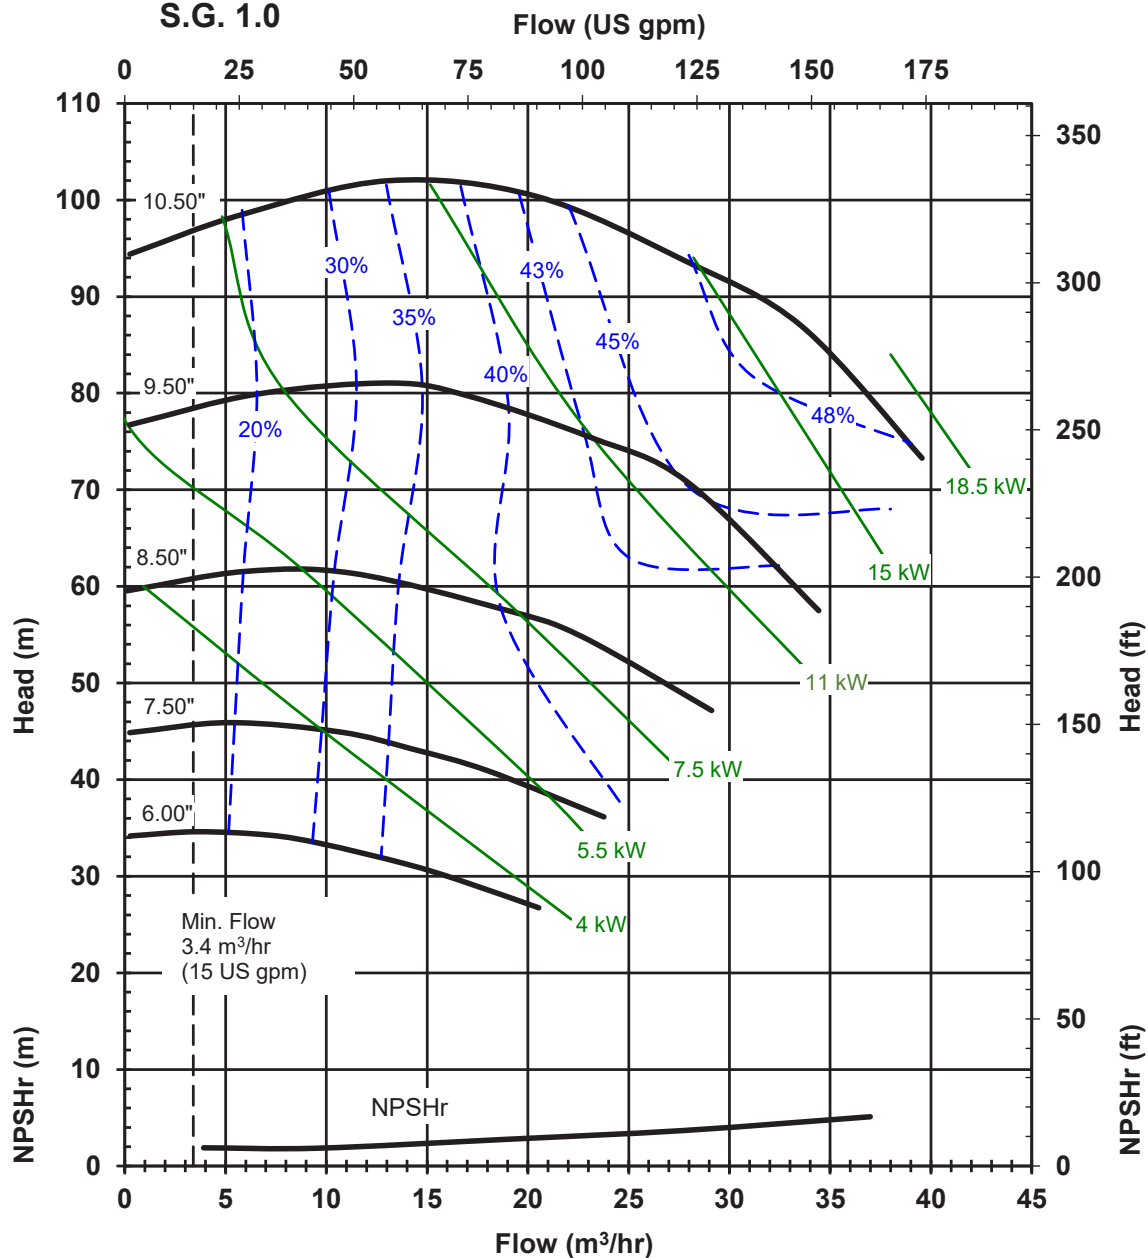

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 4.13") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR3110
1450 RPM, 50-Hz
Suction: 3" Flange
Discharge: 1" Flange
S.G 1.0

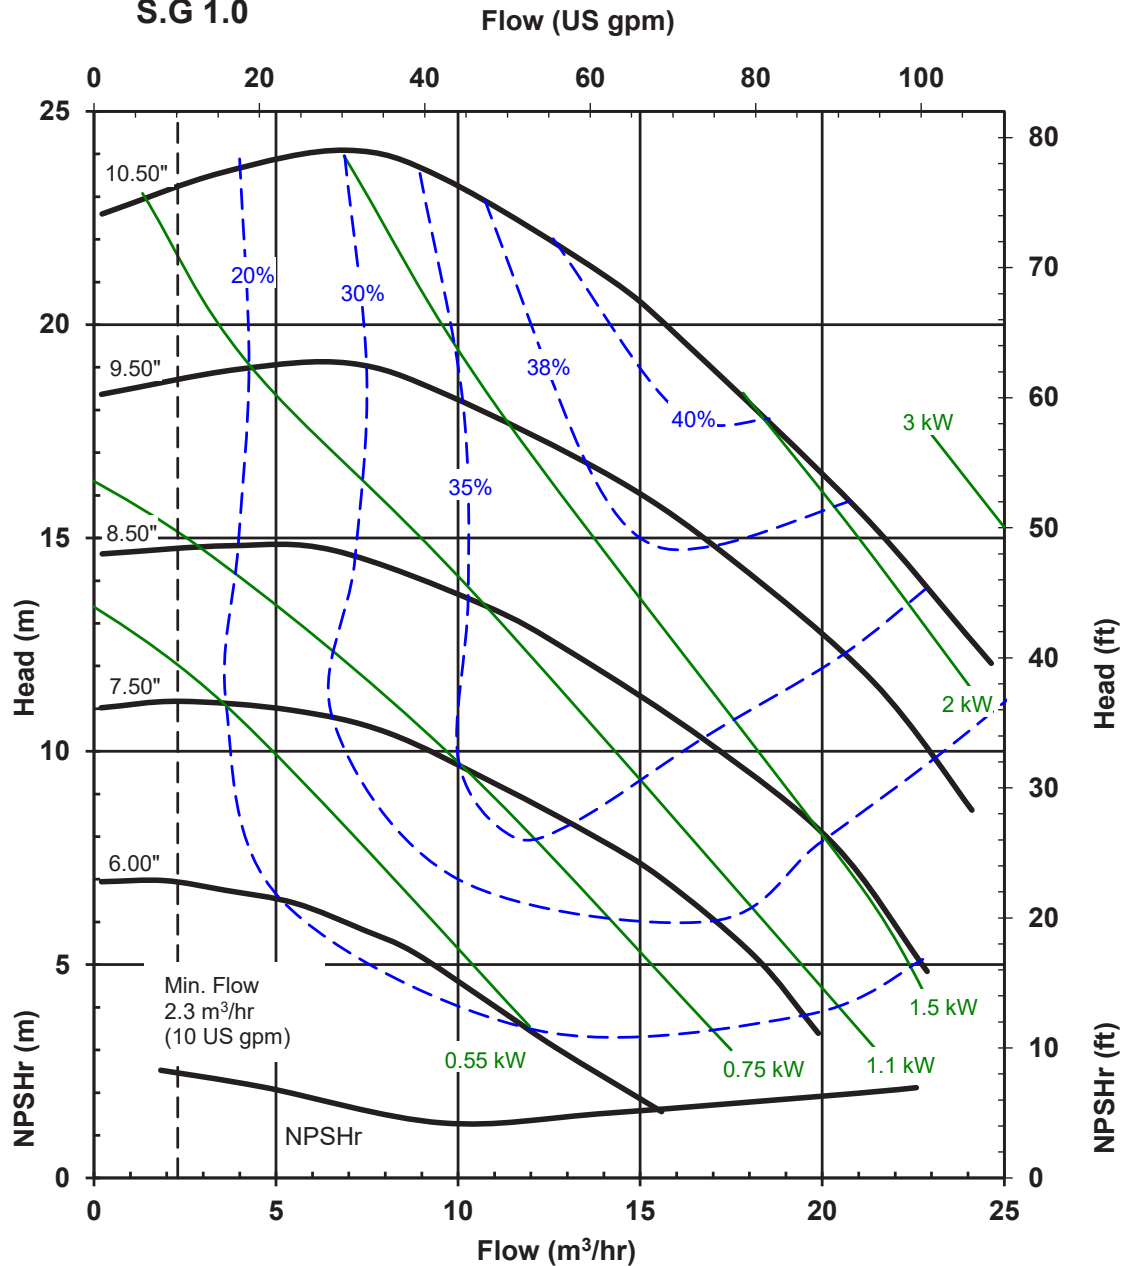


Impeller trims are available in 1/8" diameter increments (ex: 6.13", 10.37") between all curves.



UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR3156
3500 RPM, 60-Hz
Suction: 3" Flange
Discharge: 1.5"
Flange S.G. 1.0

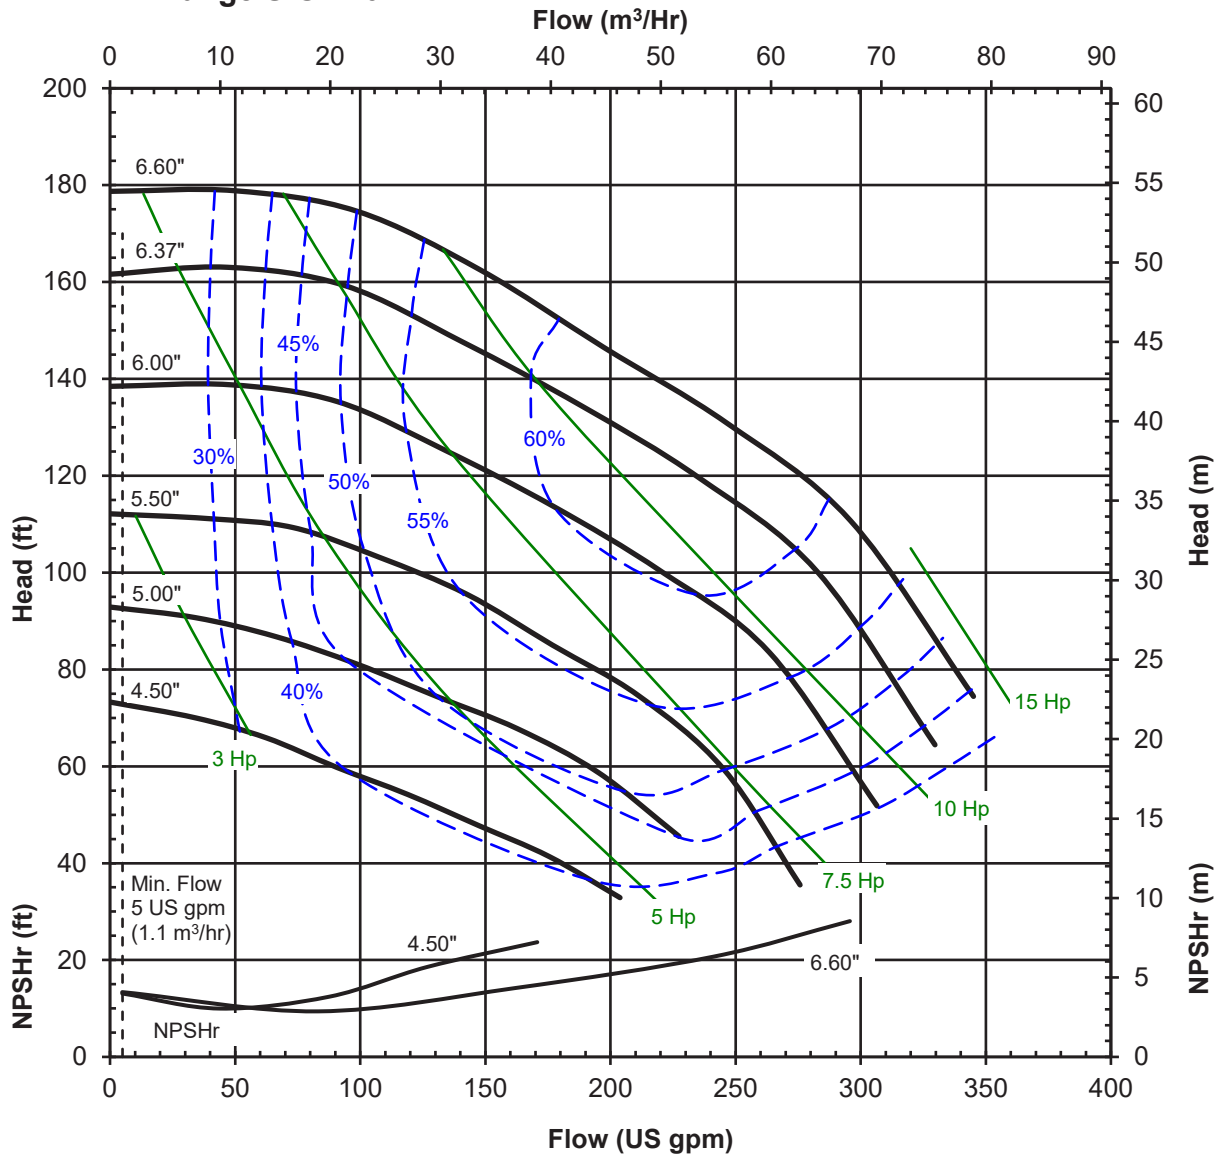


Impeller trims are available in 1/8" diameter increments (ex: 5.13", 6.25") between all curves



UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR3156
1750 RPM, 30-Hz
Suction: 3" Flange
Discharge: 1.5" Flange
S.G. 1.0

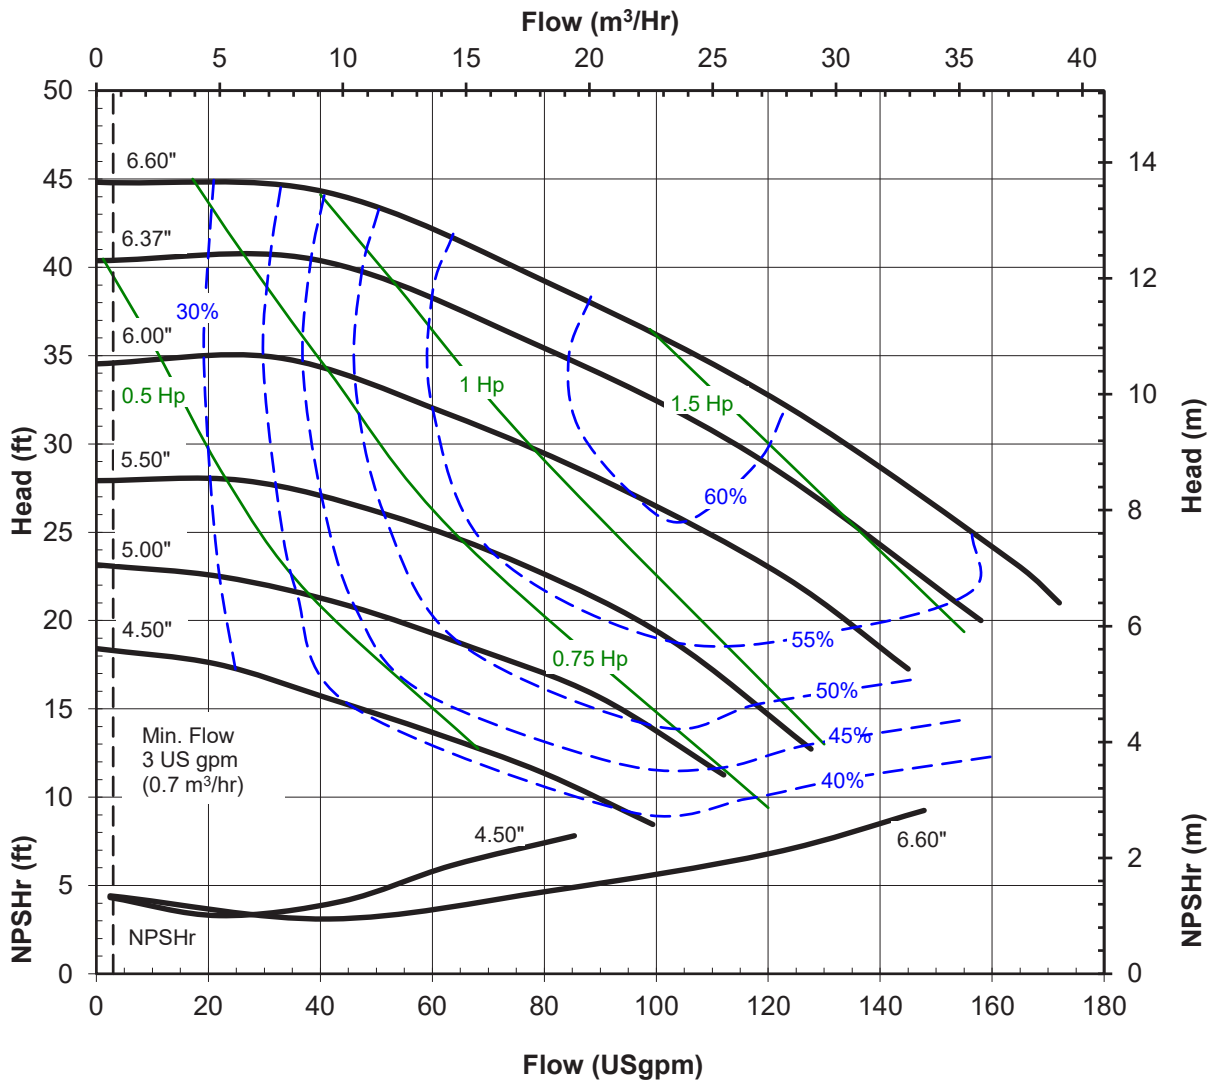

Impeller trims are available in 1/8" diameter increments (ex: 5.13", 6.25") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR3156
2900 RPM, 50-Hz
Suction: 3" Flange
Discharge: 1.5"
Flange S.G. 1.0

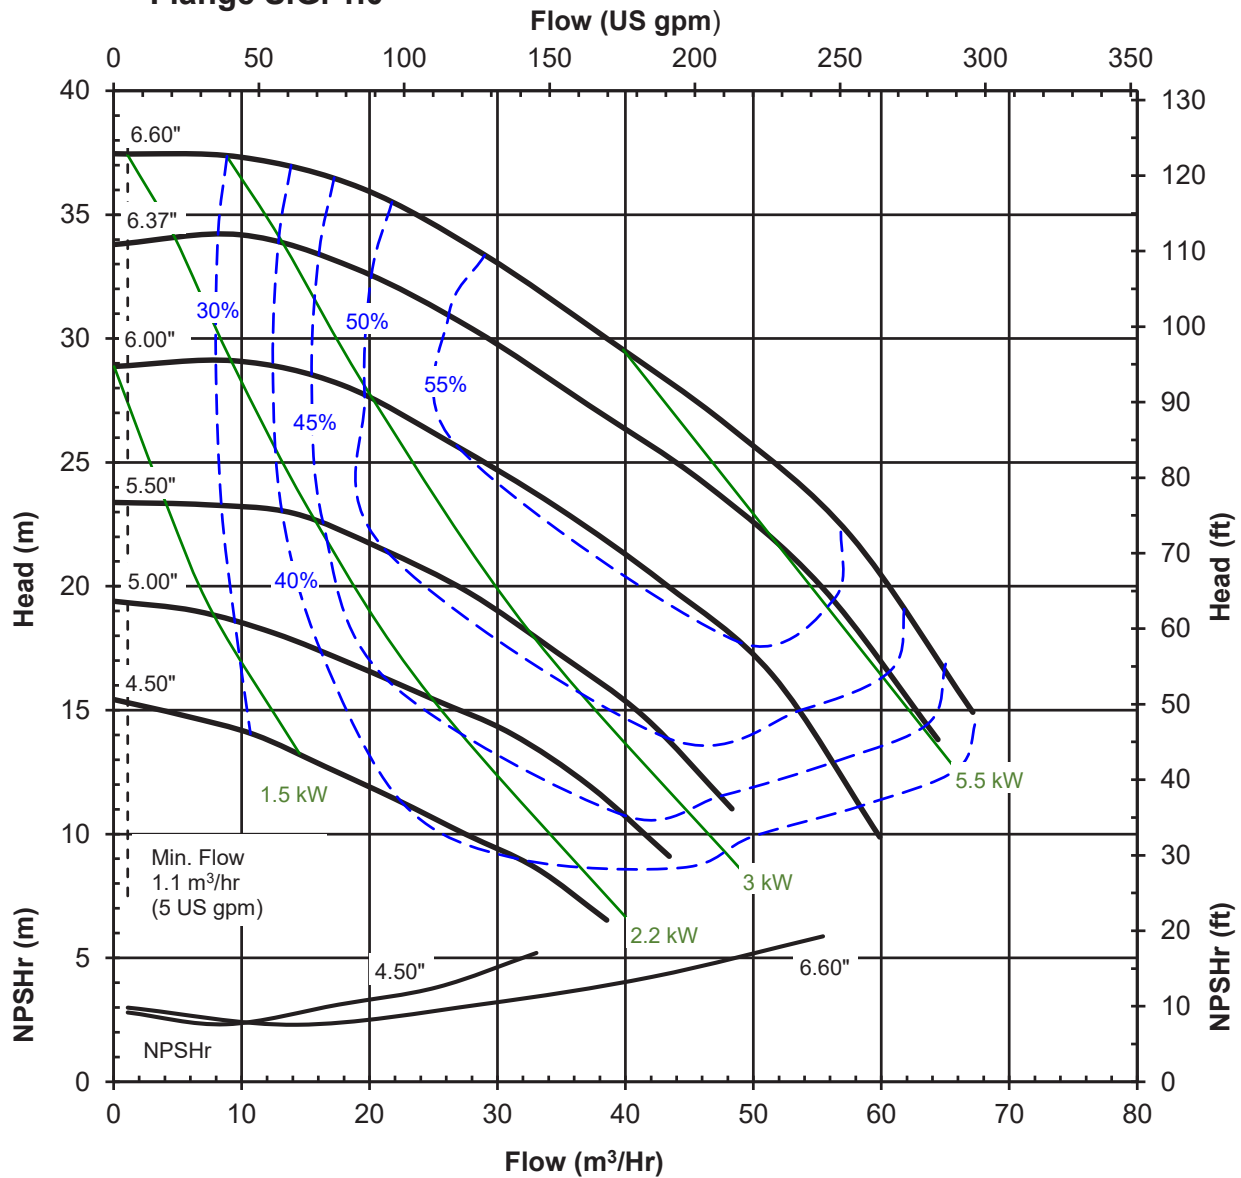

Impeller trims are available in 1/8" diameter increments (ex: 5.13", 6.25") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR 3156
1450 RPM, 25-Hz
Suction: 3" Flange
Discharge: 1.5"
Flange S.G. 1.0

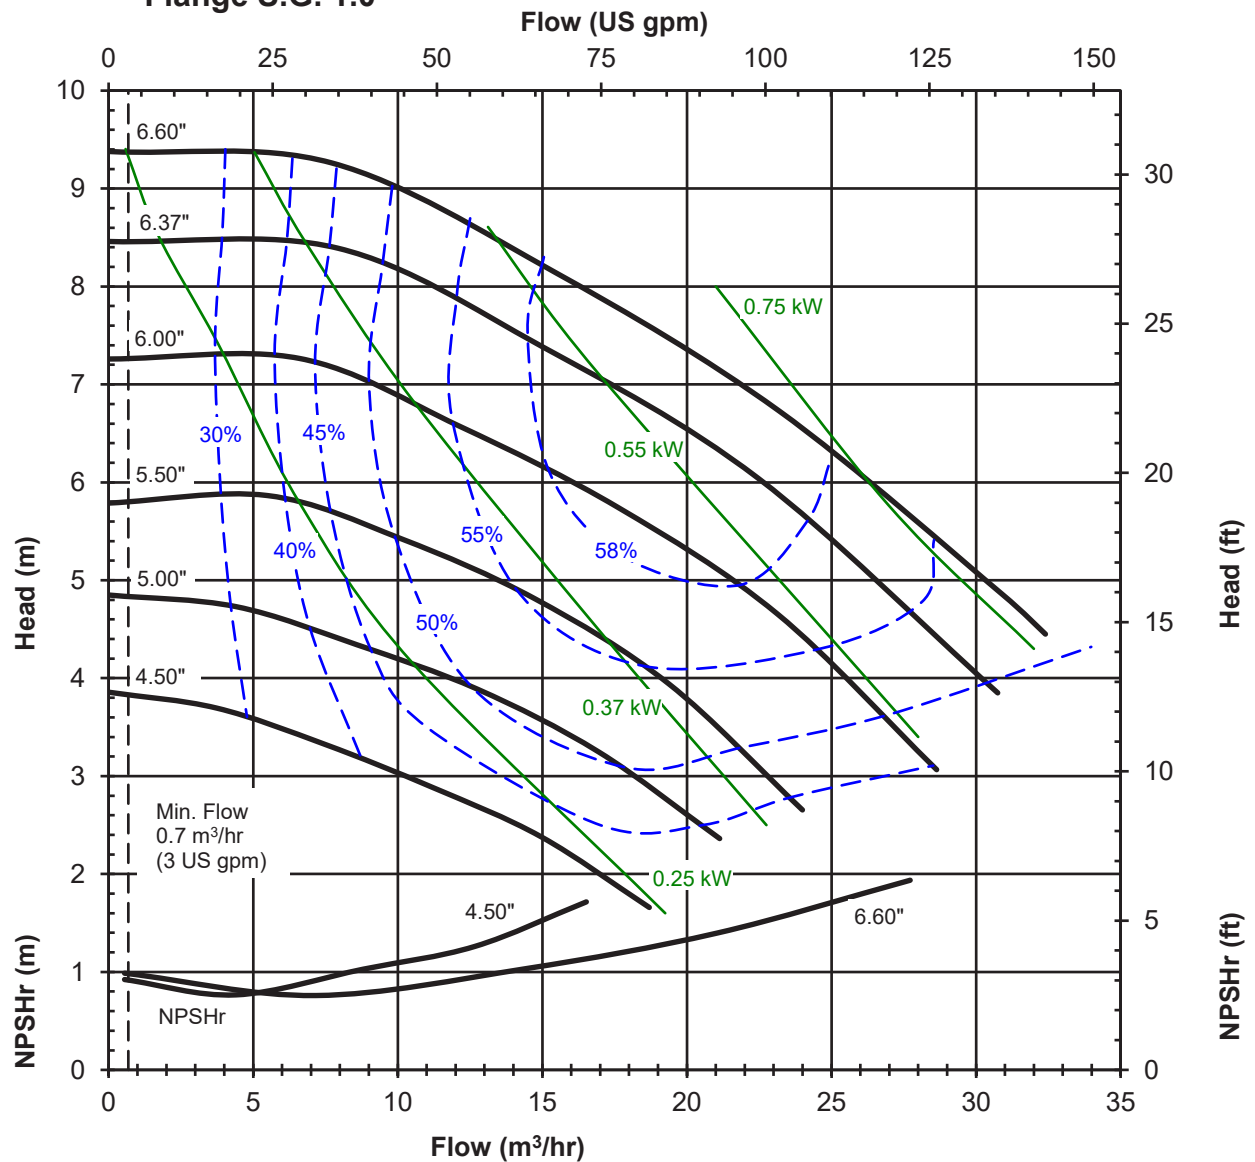

Impeller trims are available in 1/8" diameter increments (ex: 5.13", 6.25") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR3158
3500 RPM, 60-Hz
Suction: 3" Flange
Discharge: 1-1/2"
Flange S.G. 1.0

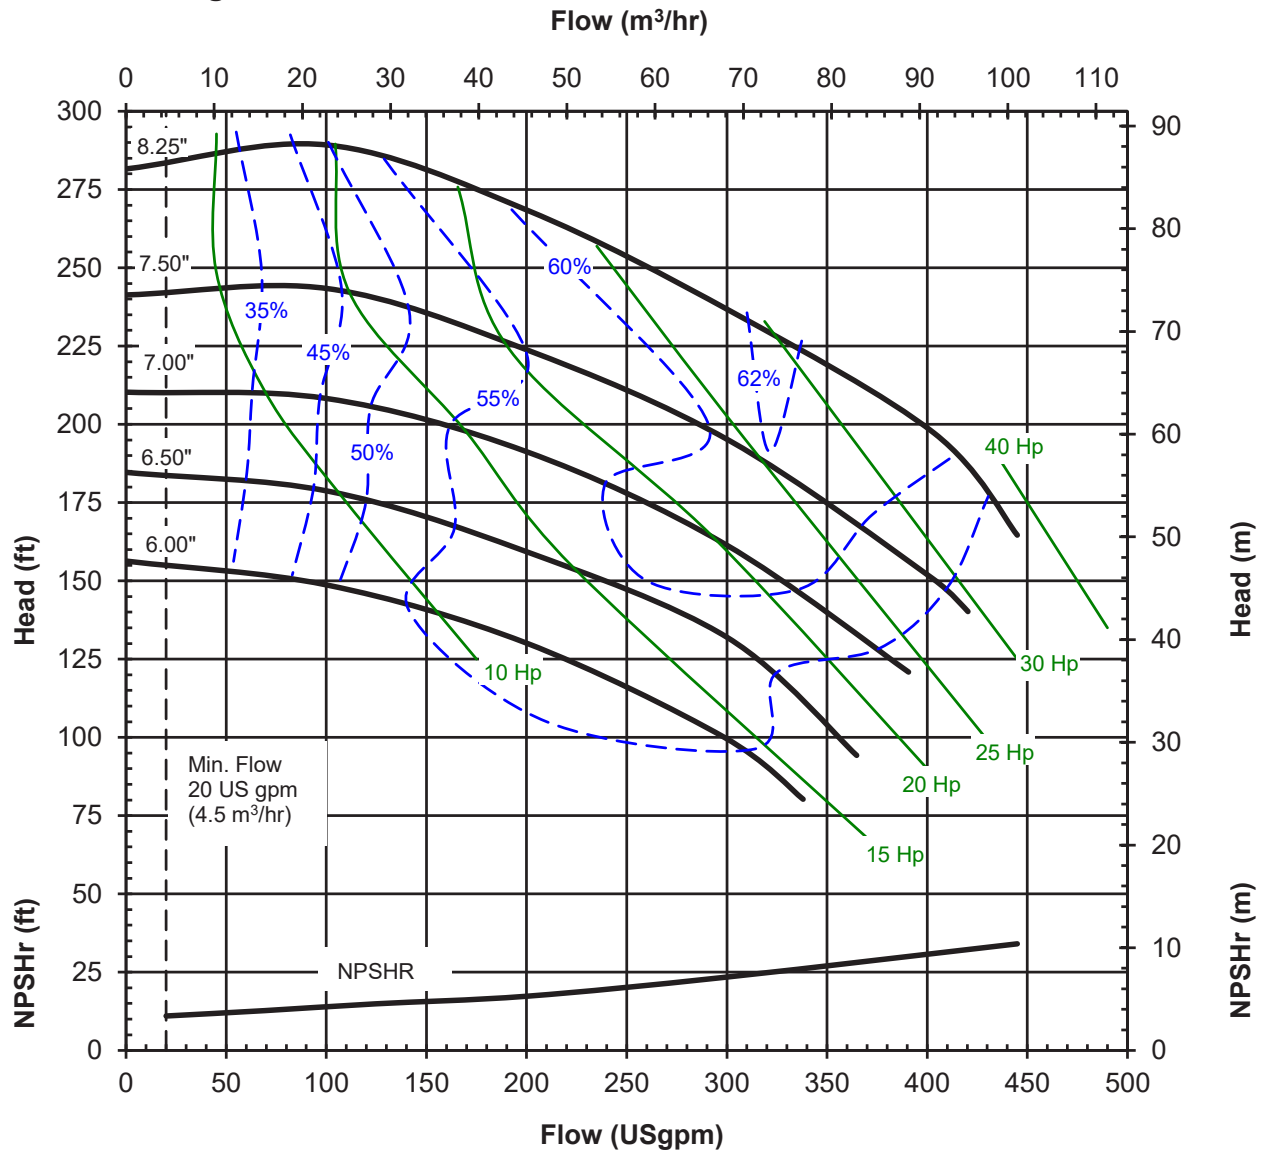


Impeller trims are available in 1/8" diameter increments (ex: 6.13", 8.13") between all curves.



UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR3158
1750 RPM, 60-Hz
Suction: 3" Flange
Discharge: 1-1/2" Flange
S.G. 1.0

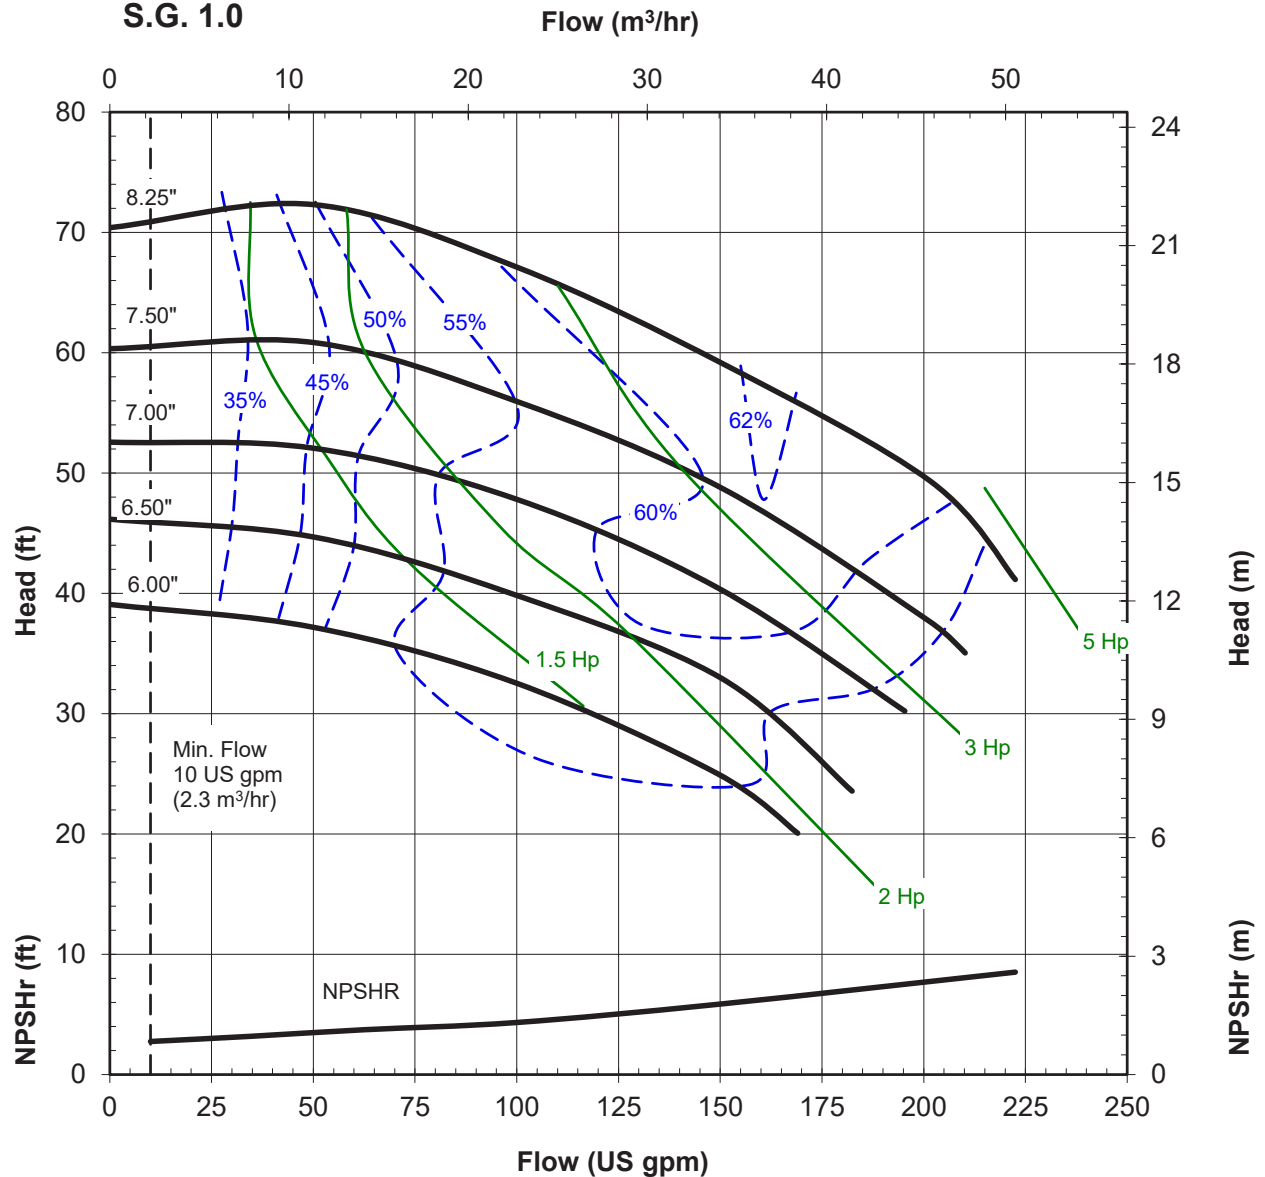

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 8.13") between all curves.

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR3158
2900 RPM, 50-Hz
Suction: 3" Flange
Discharge: 1-1/2"
Flange S.G. 1.0

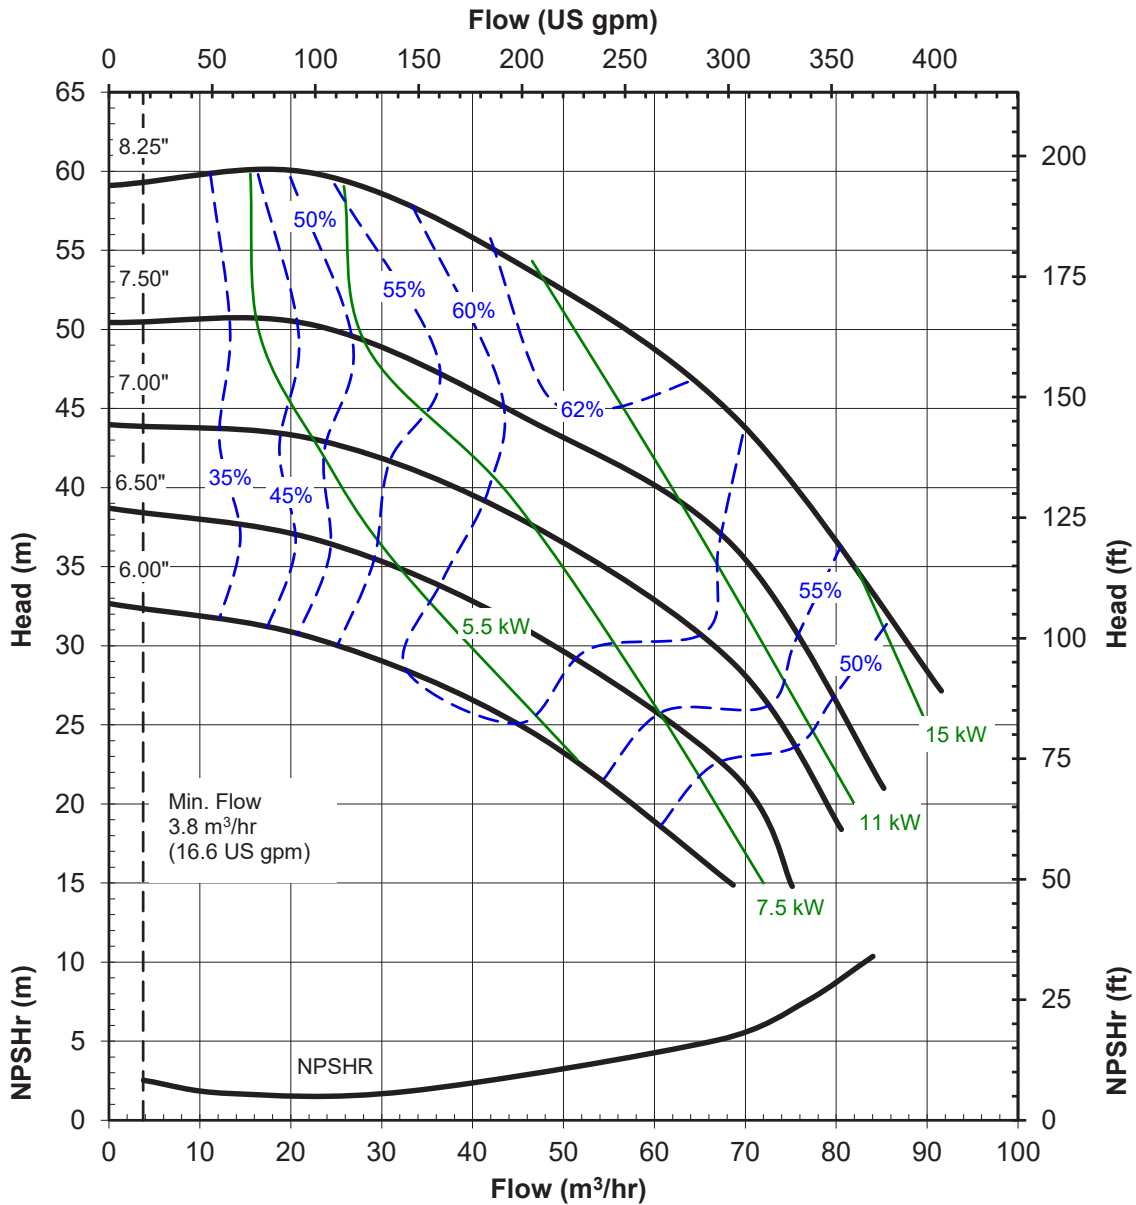

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 8.13")

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR3158
1450 RPM, 50-Hz
Suction: 3" Flange
Discharge: 1-1/2"
Flange S.G. 1.0

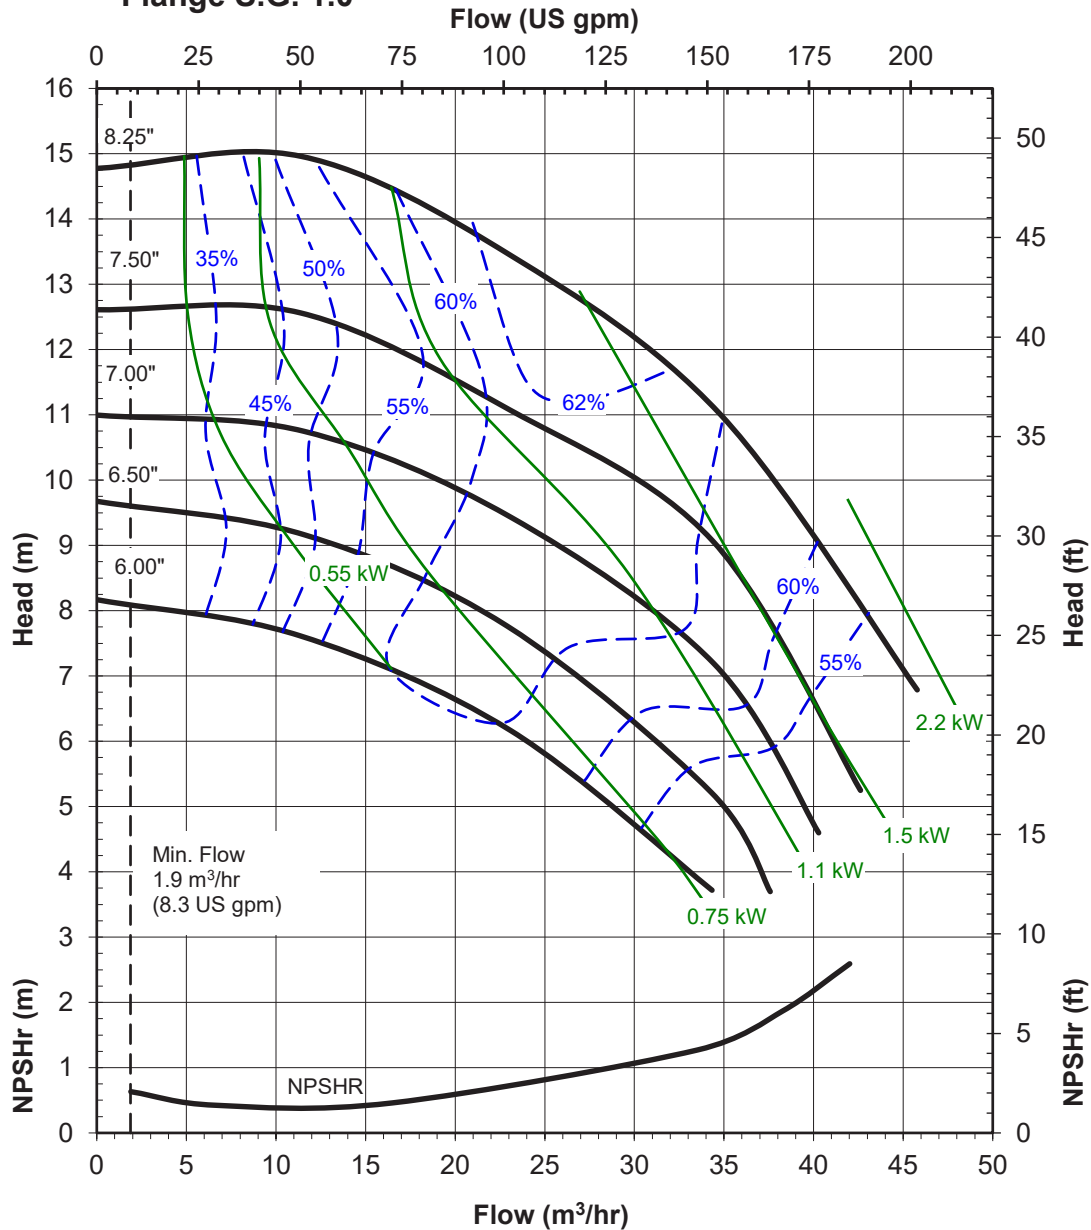

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 8.13") between all curves.

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR326
3500 RPM, 60-Hz
Suction: 3" Flange
Discharge: 2" Flange
S.G. 1.0

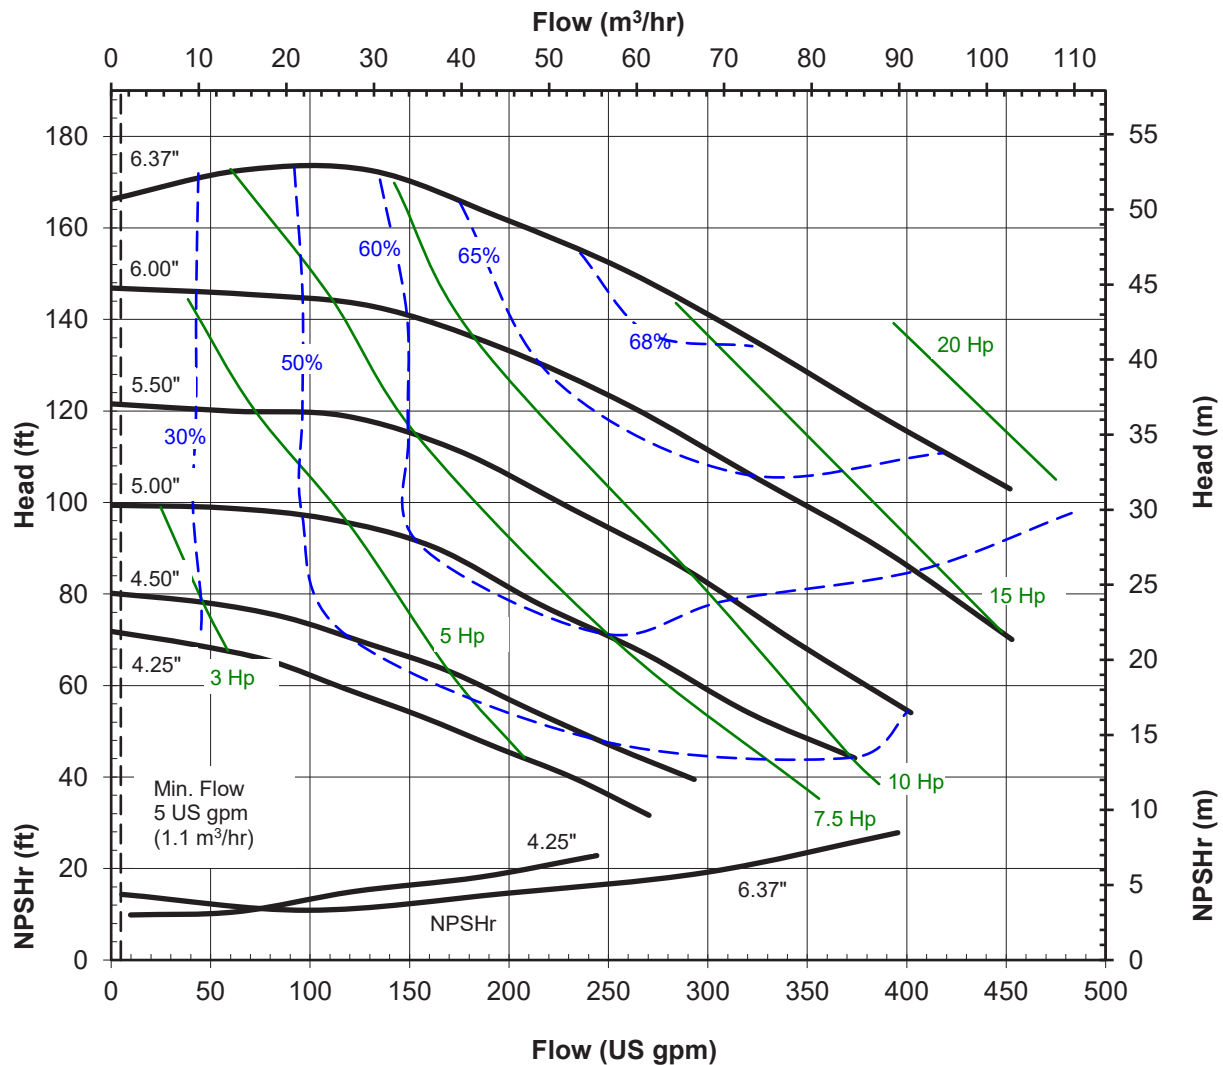

Impeller trims are available in 1/8" diameter increments (ex: 5.13", 6.38") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR326
1750 RPM, 30-Hz
Suction: 3" Flange
Discharge: 2" Flange
S.G. 1.0

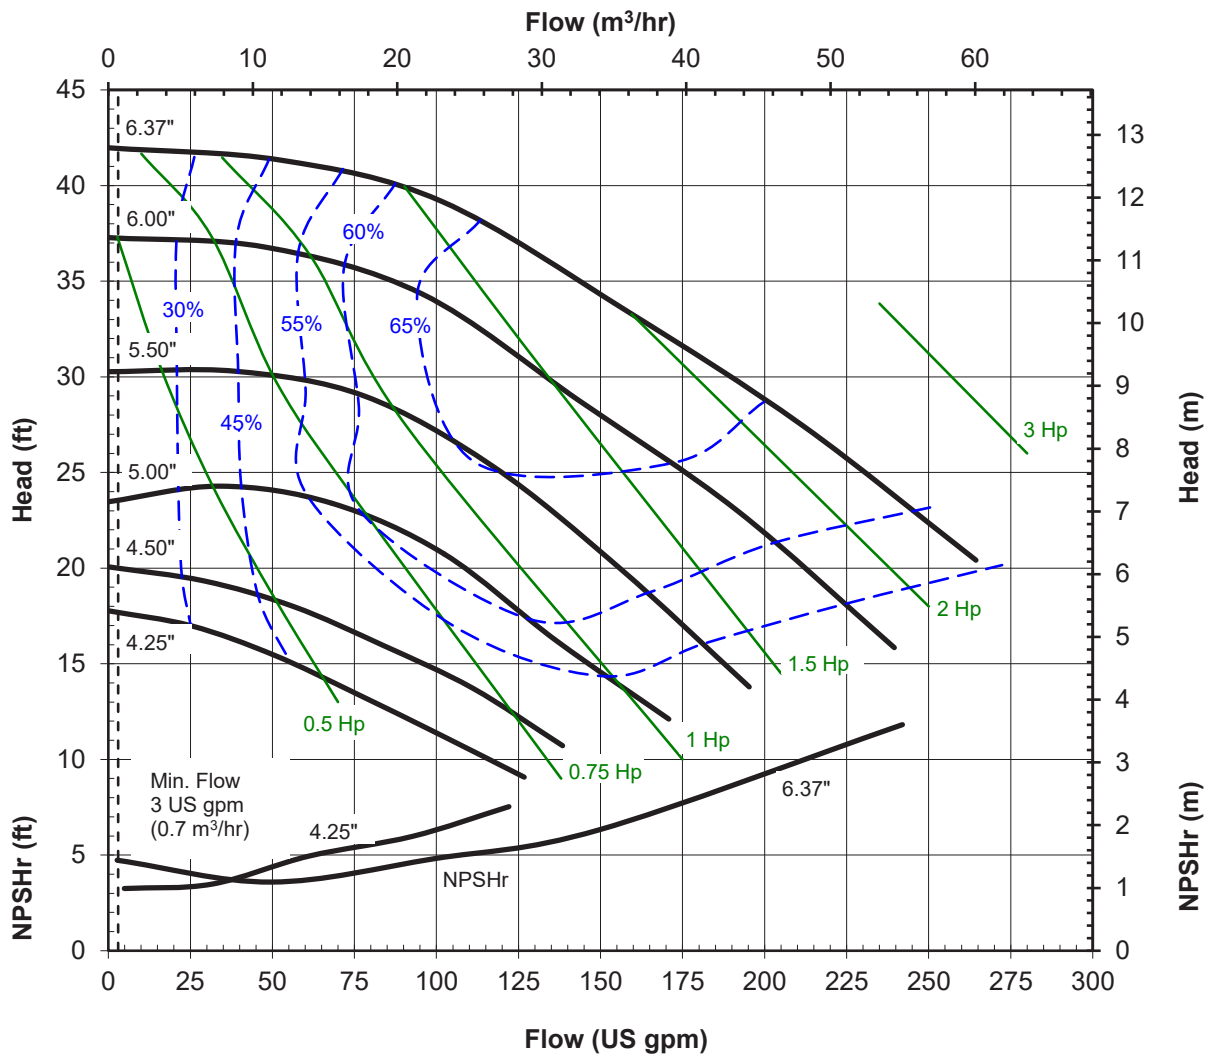

Impeller trims are available in 1/8" diameter increments (ex: 5.13", 6.38") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR326
2900 RPM, 50-Hz
Suction: 3" Flange
Discharge: 2" Flange
S.G. 1.0

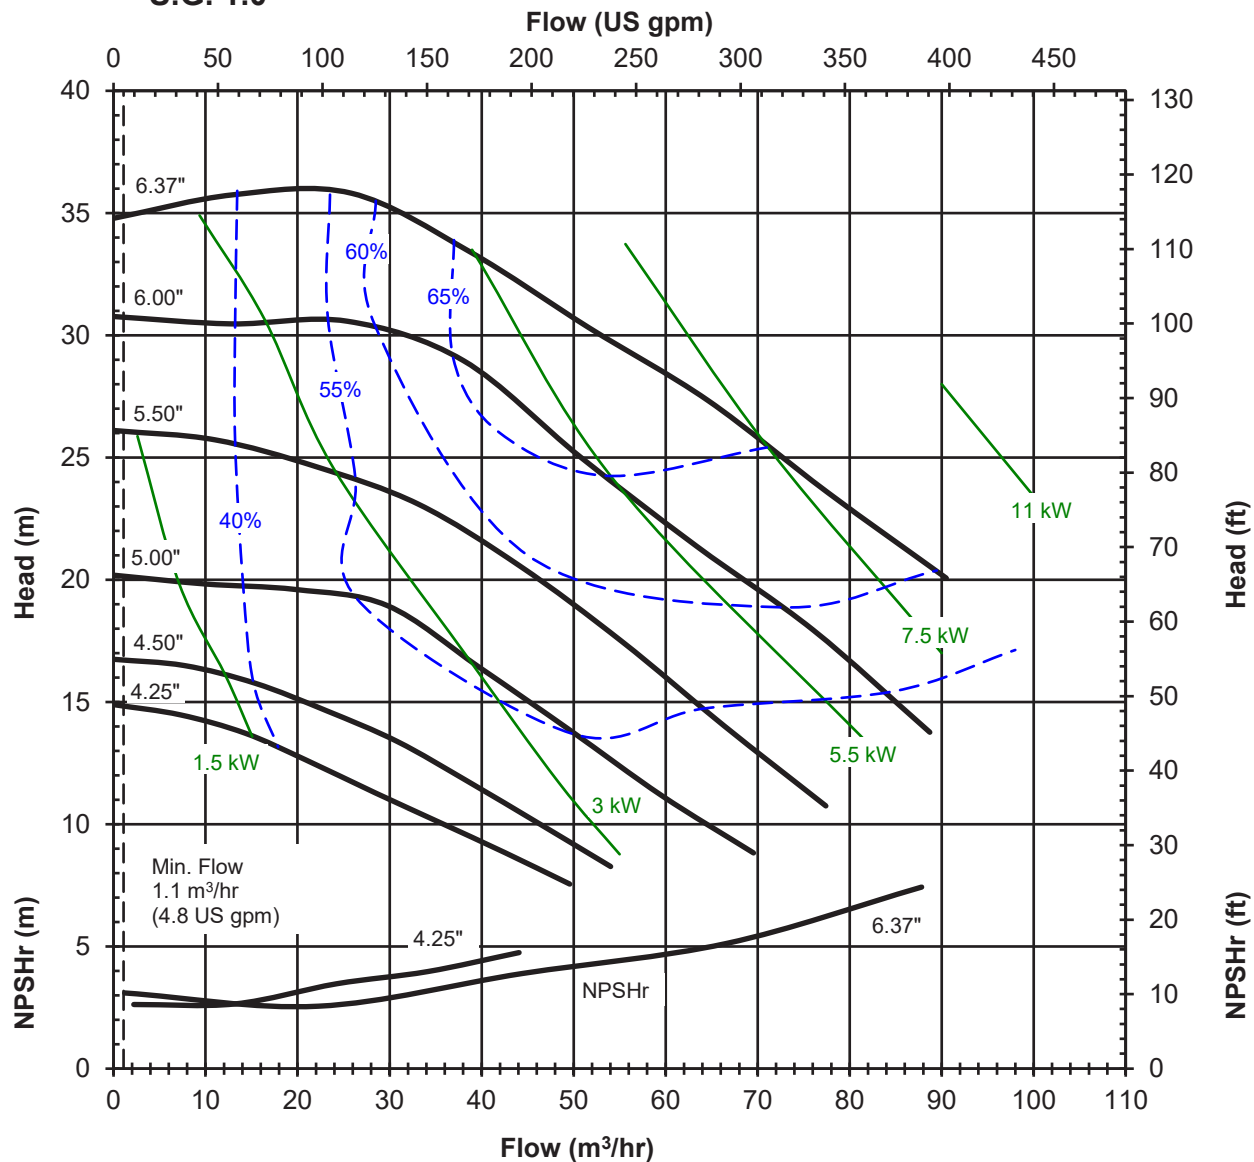

Impeller trims are available in 1/8" diameter increments (ex: 5.13", 6.38") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR326
1450 RPM, 25-Hz
Suction: 3" Flange
Discharge: 2" Flange
S.G. 1.0

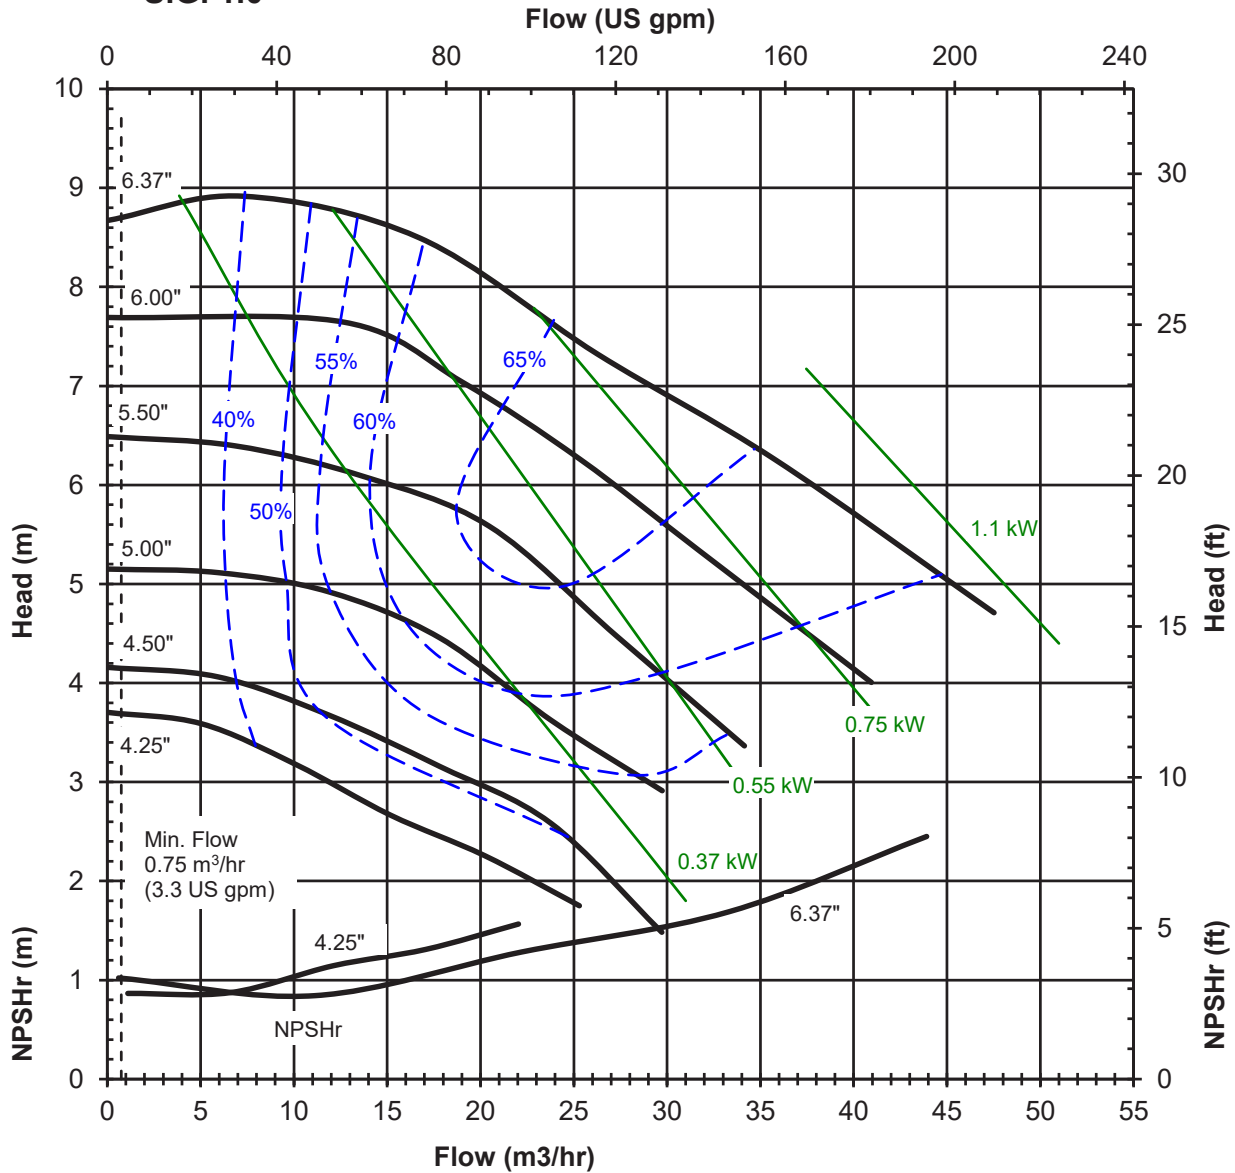


Impeller trims are available in 1/8" diameter increments (ex: 5.13", 6.38") between all curves



UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR326H
3500 RPM, 60-Hz
Suction: 3" Flange
Discharge: 2" Flange
S.G. 1.0

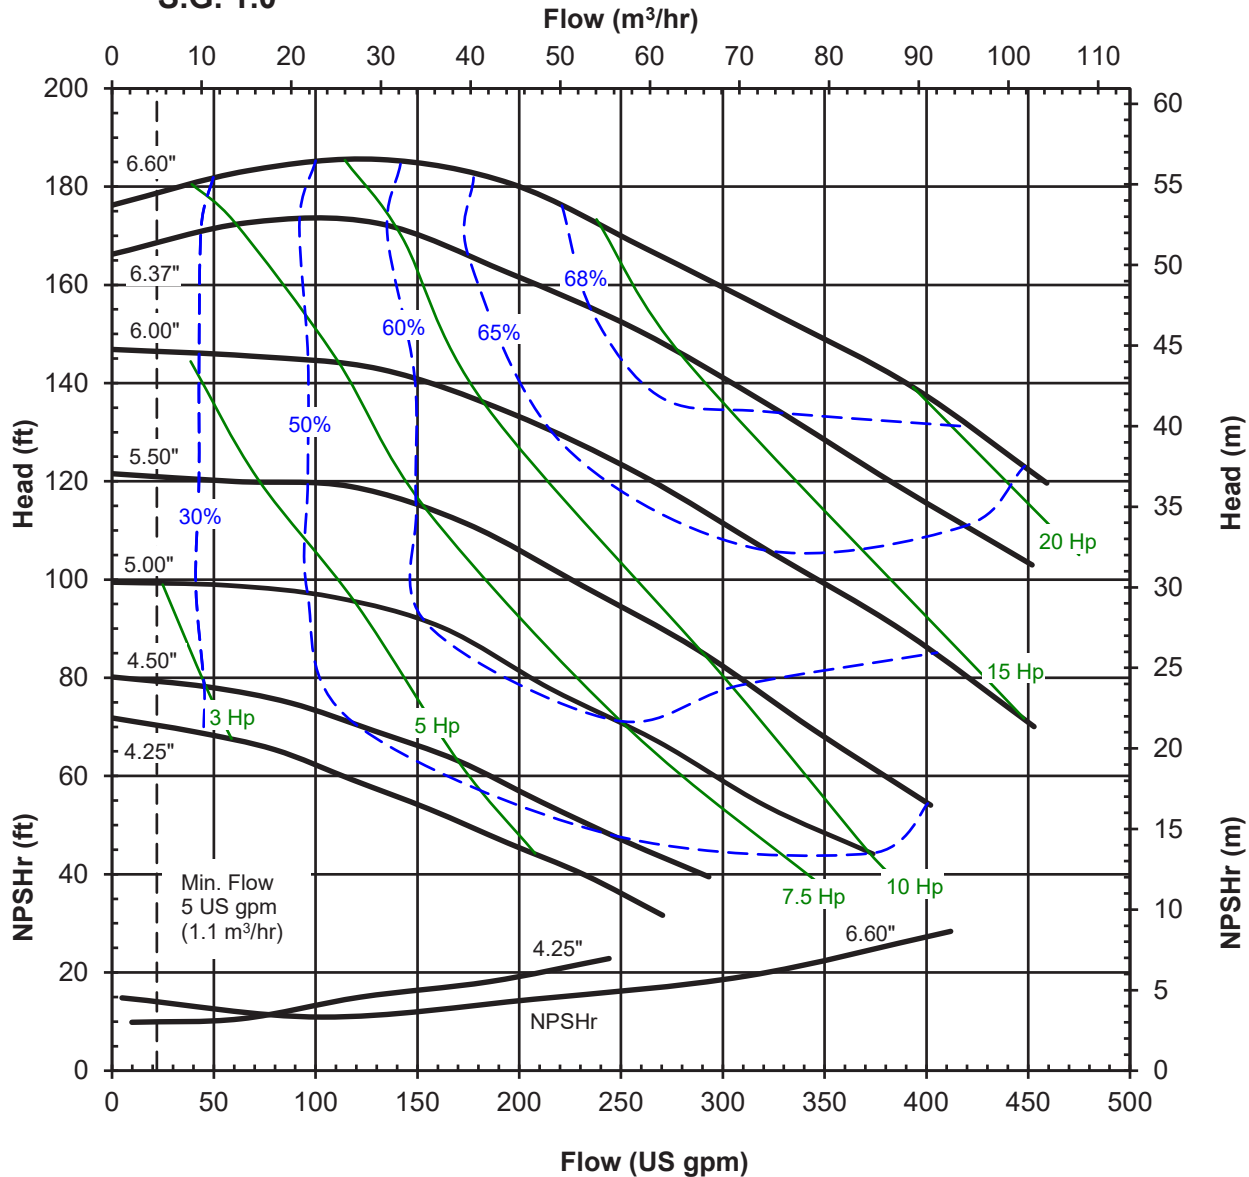


Impeller trims are available in 1/8" diameter increments (ex: 5.13", 6.38") between all curves



UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR326H
1750 RPM, 30-Hz
Suction: 3" Flange
Discharge: 2" Flange
S.G. 1.0

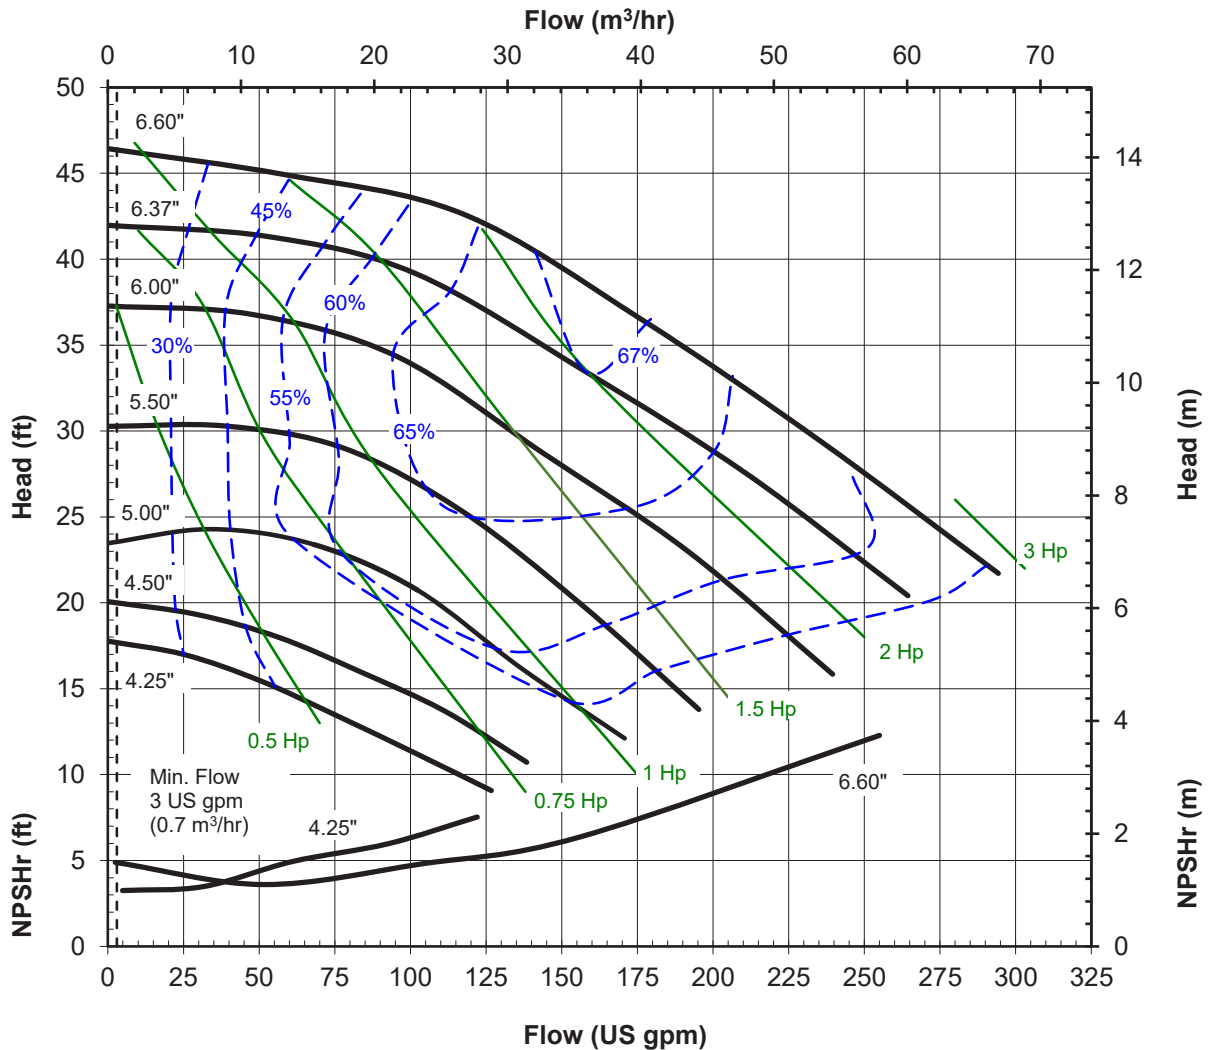

Impeller trims are available in 1/8" diameter increments (ex: 5.13", 6.38") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR326H
2900 RPM, 50-Hz
Suction: 3" Flange
Discharge: 2" Flange
S.G. 1.0

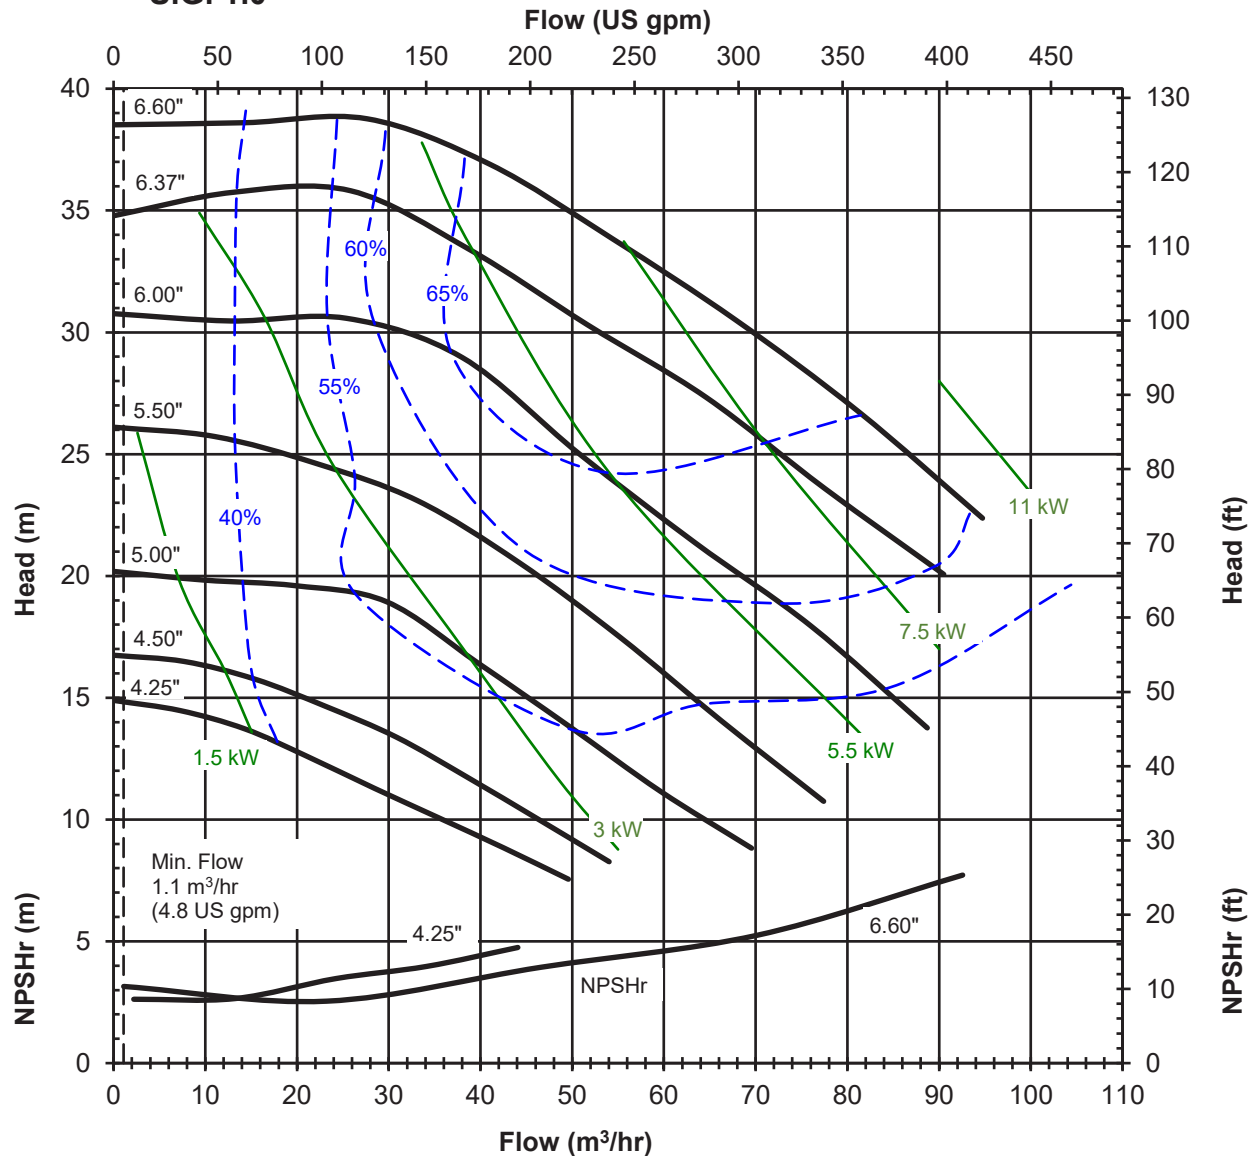

Impeller trims are available in 1/8" diameter increments (ex: 5.13", 6.38") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR326H
1450 RPM, 25-Hz
Suction: 3" Flange
Discharge: 2" Flange
S.G. 1.0

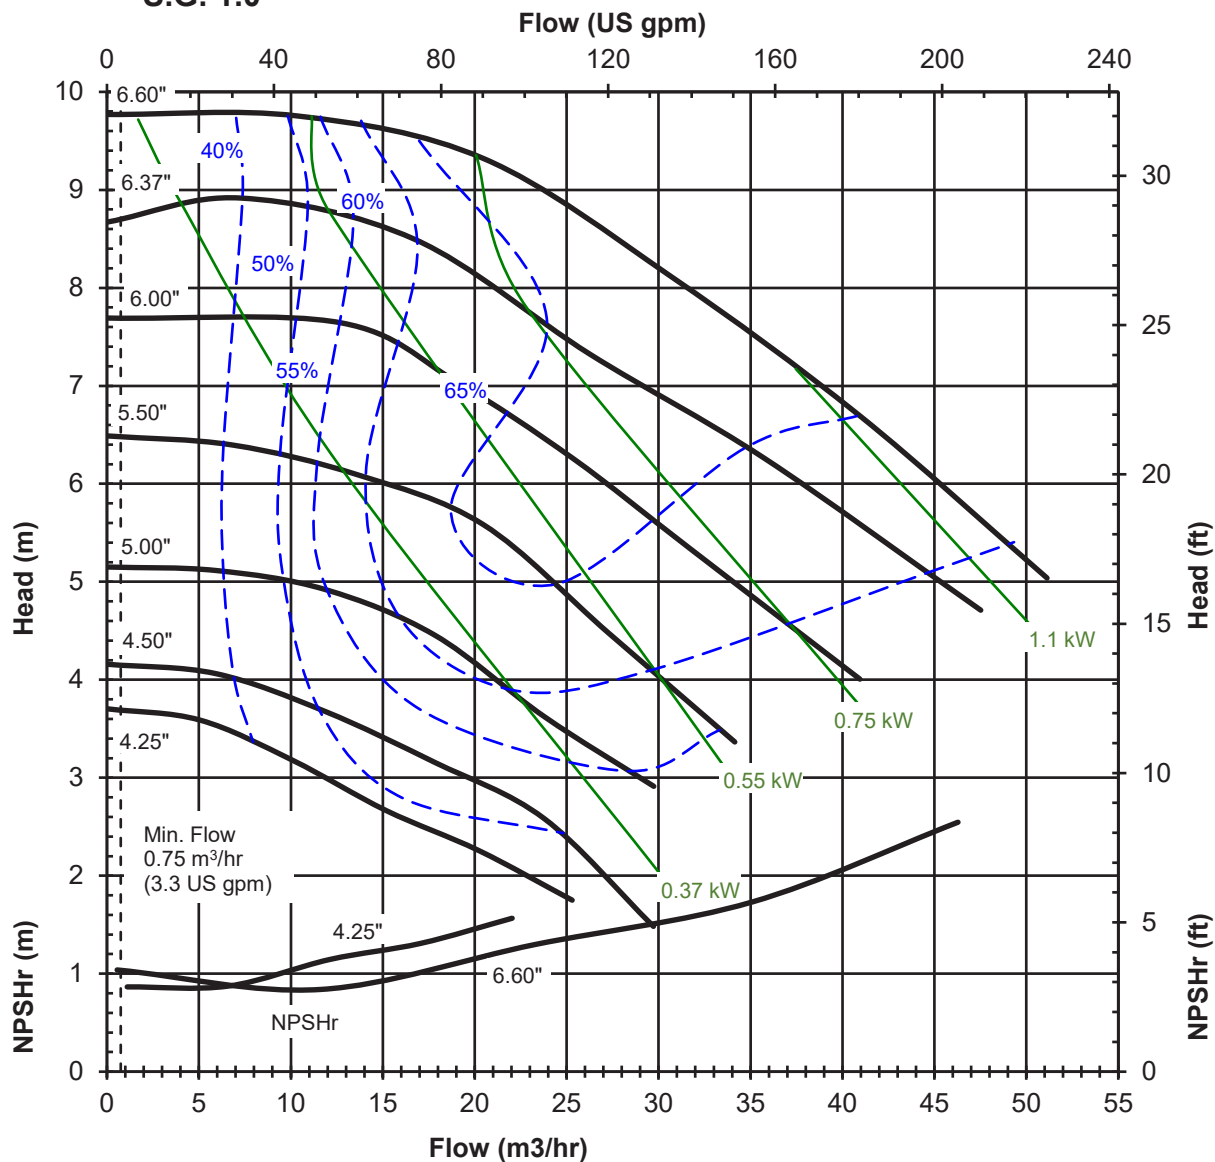

Impeller trims are available in 1/8" diameter increments (ex: 5.13", 6.38") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR328
3500 RPM, 60-Hz
Suction: 3" Flange
Discharge: 2" Flange
S.G. 1.0

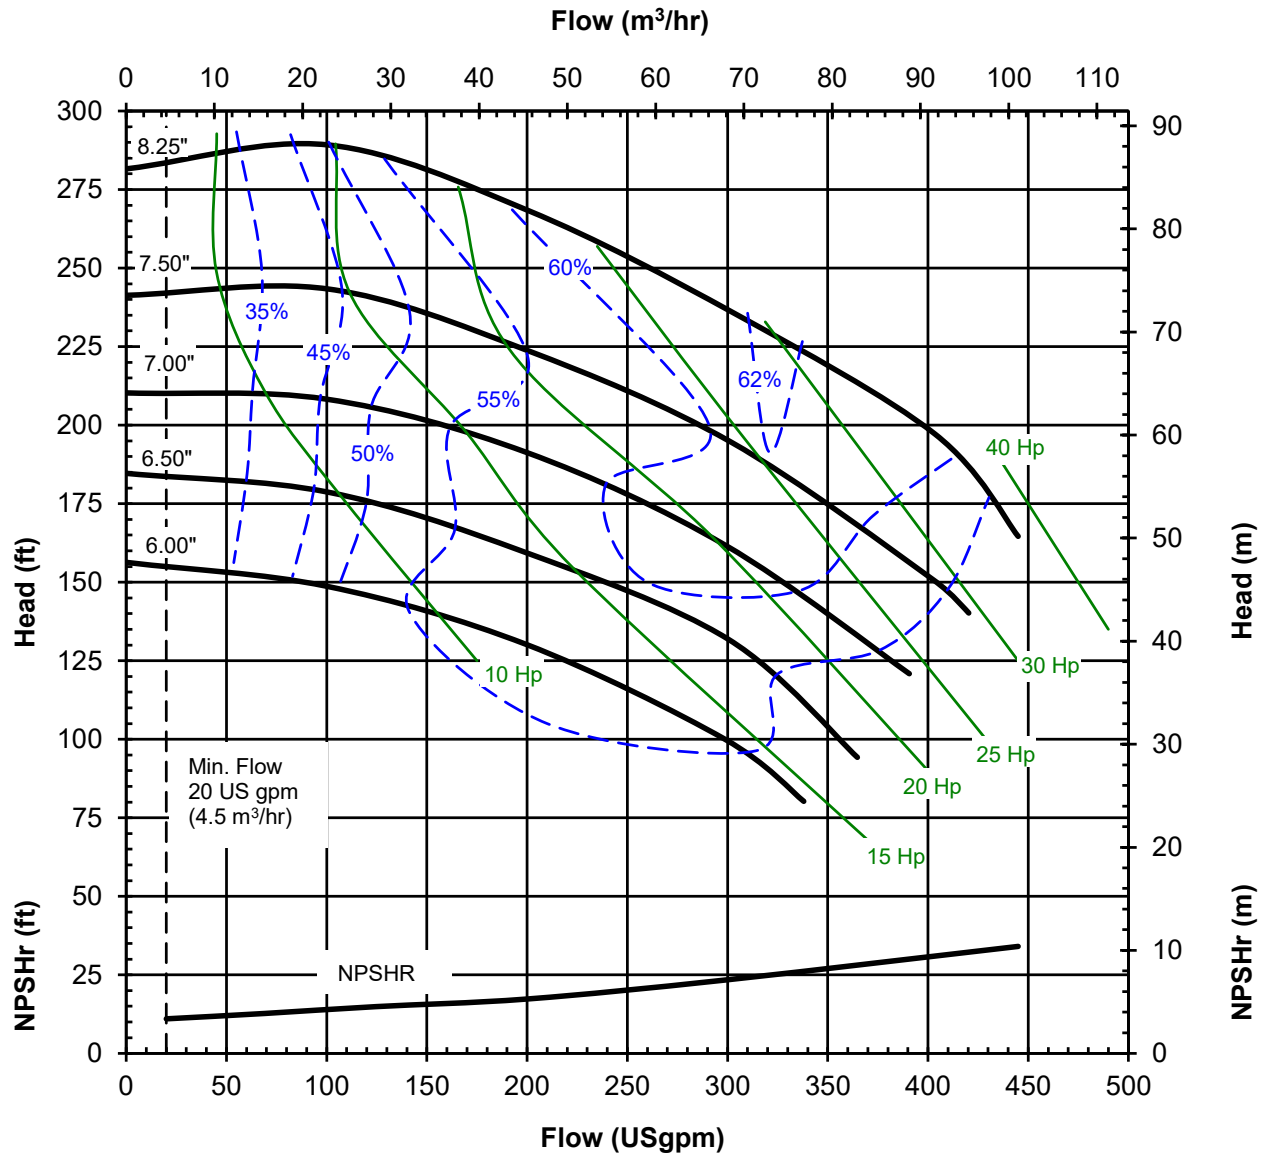


Impeller trims are available in 1/8" diameter increments (ex: 6.13", 8.13") between all curves.



UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR328
1750 RPM, 60-Hz
Suction: 3" Flange
Discharge: 2" Flange
S.G. 1.0

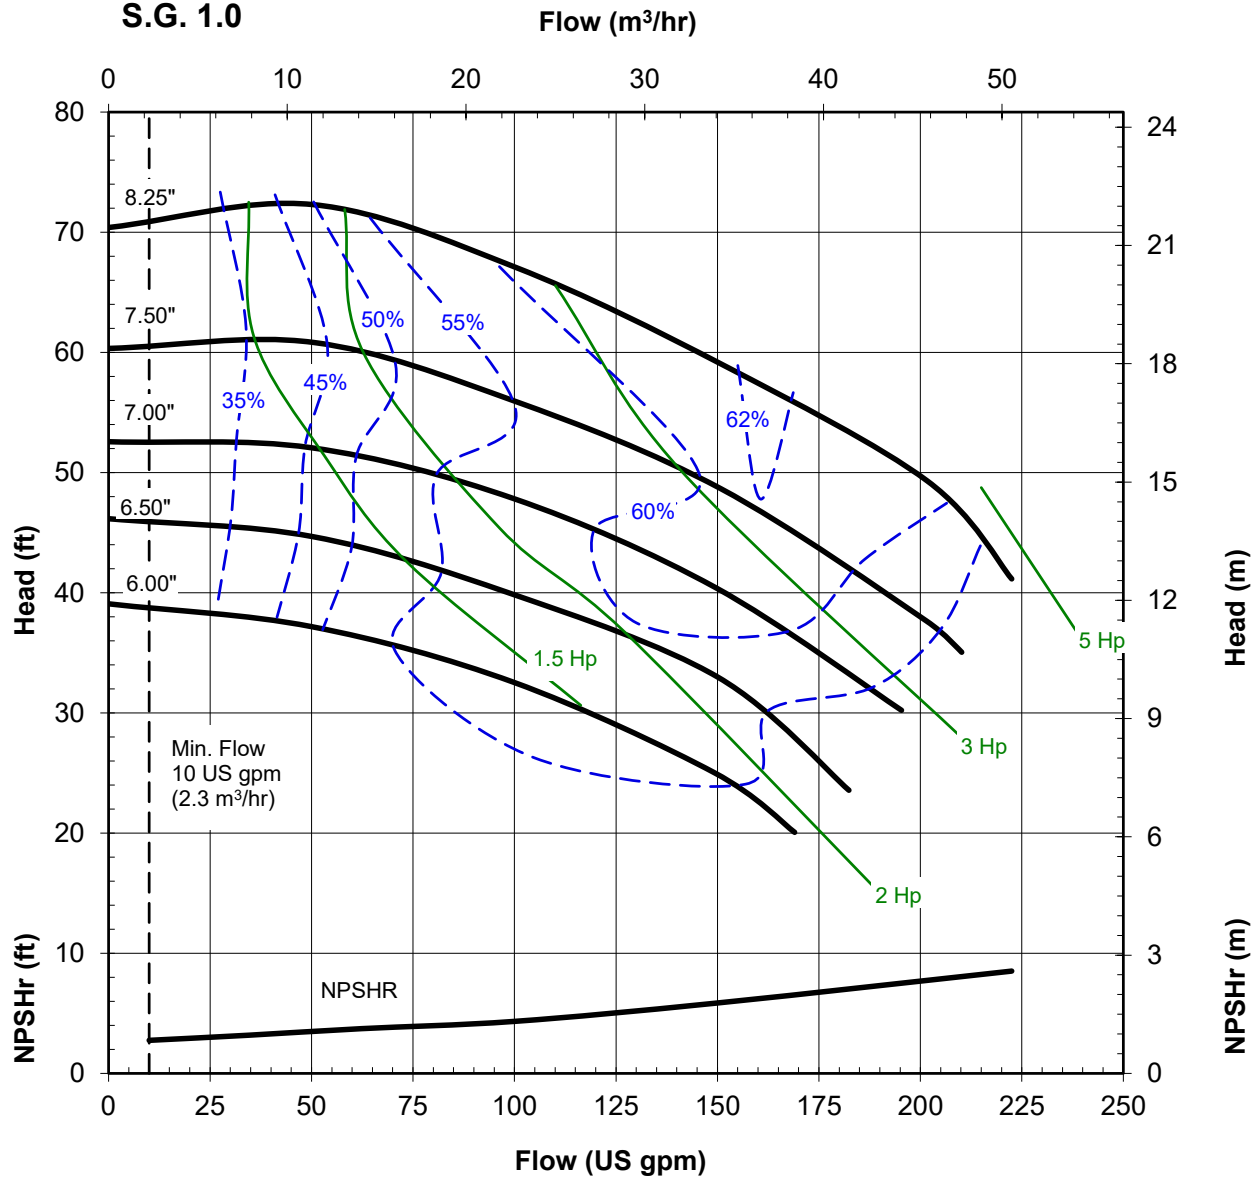


Impeller trims are available in 1/8" diameter increments (ex: 6.13", 8.13") between all curves.



UCR SERIES STANDARD PERFORMANCE


Model: UCR328
2900 RPM, 50-Hz
Suction: 3" Flange
Discharge: 2" Flange
S.G. 1.0

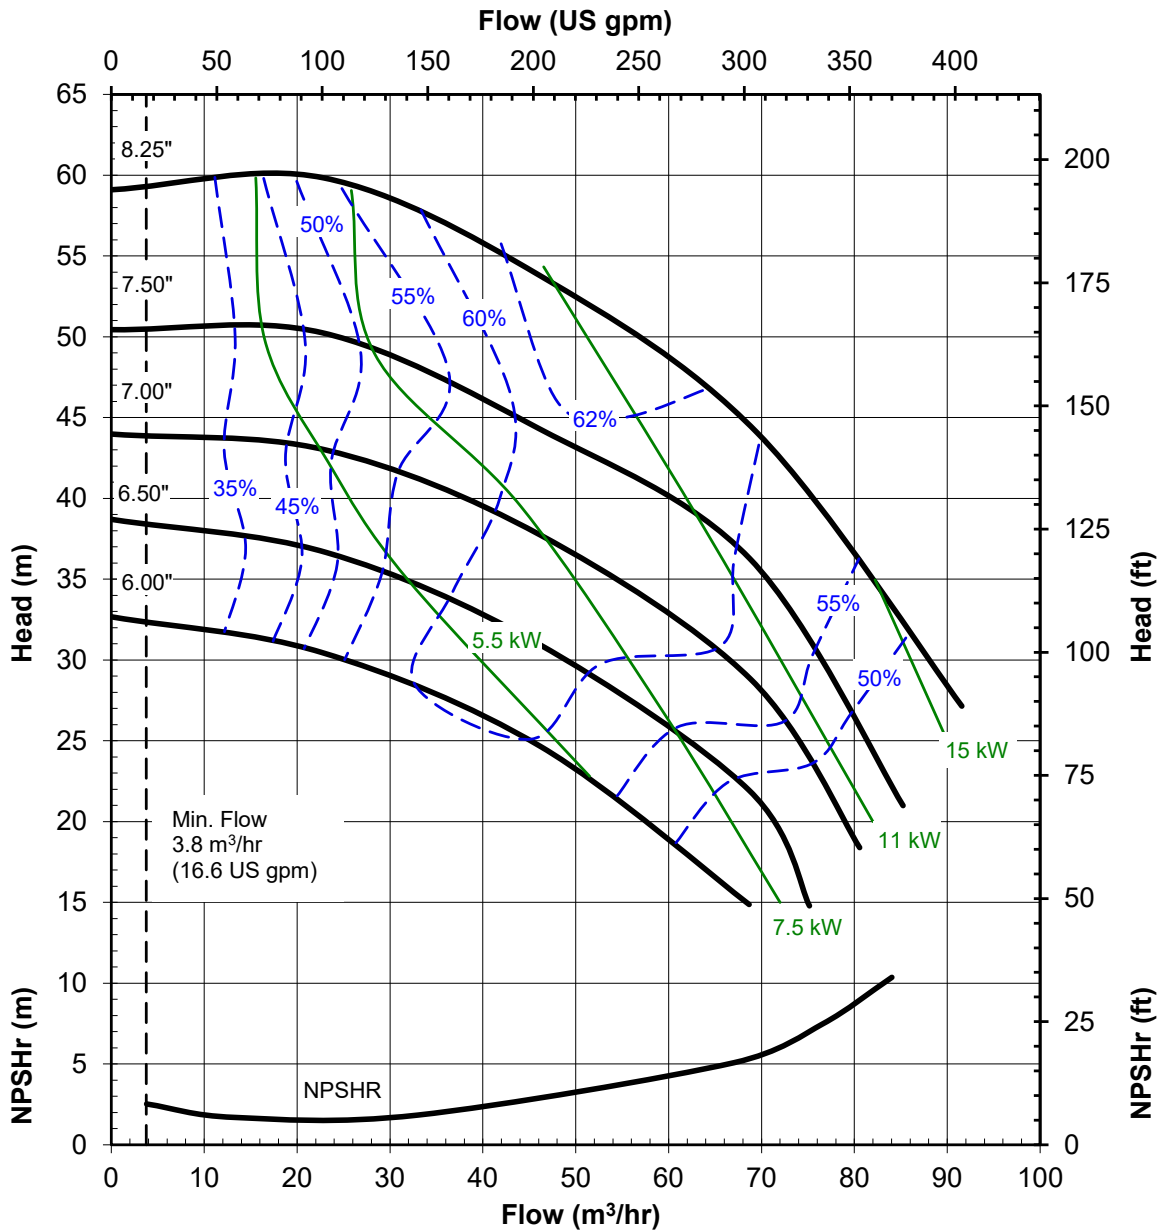

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 8.13")

UCR SERIES STANDARD PERFORMANCE


Model: UCR328
1450 RPM, 50-Hz
Suction: 3" Flange
Discharge: 2" Flange
S.G. 1.0

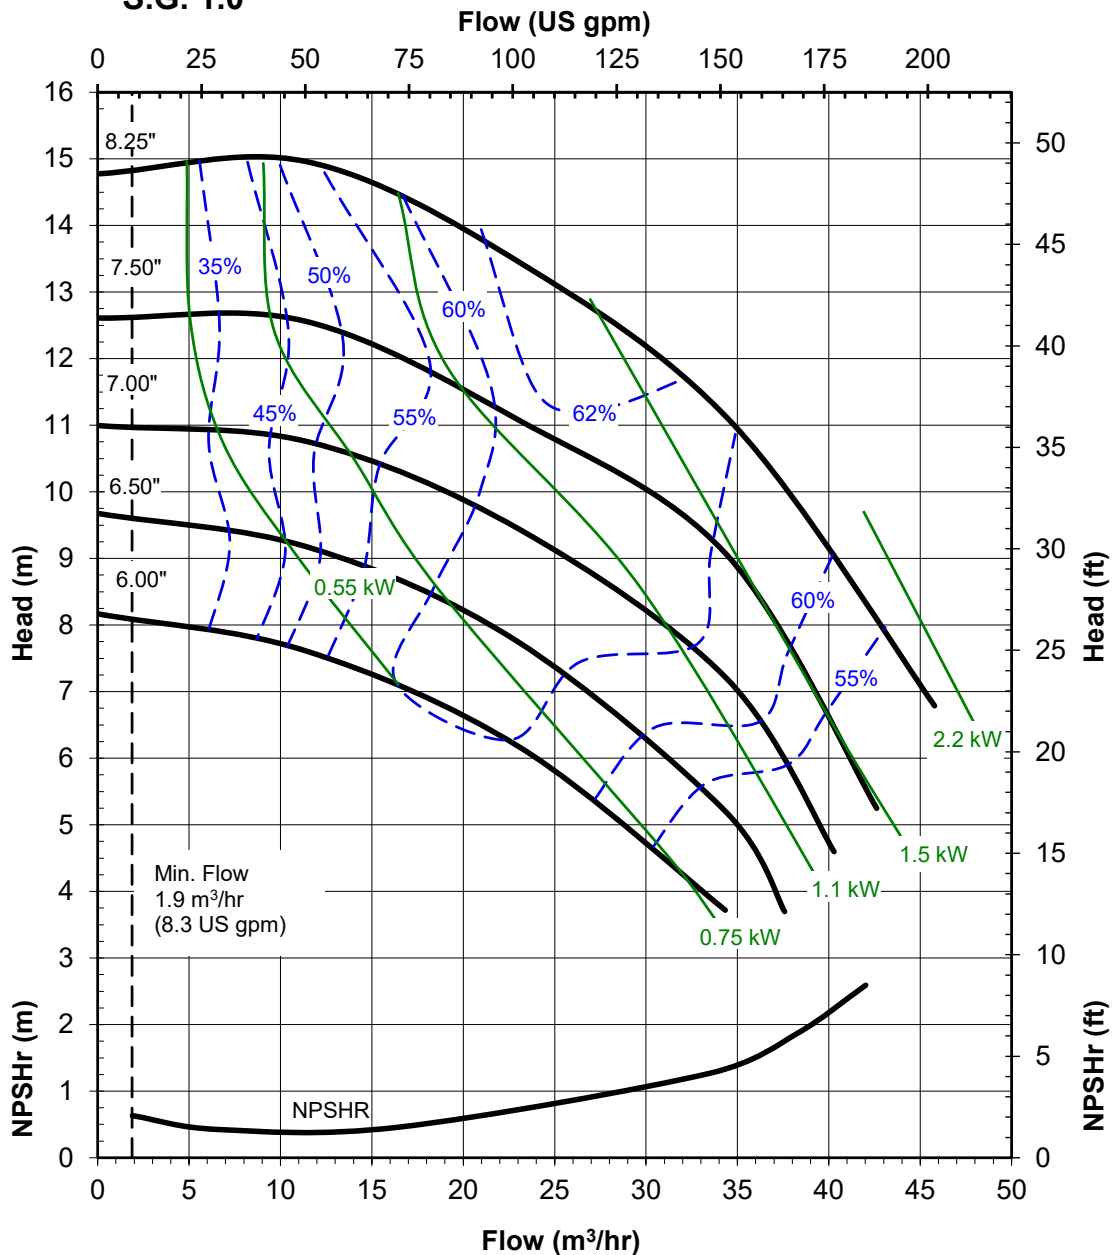

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 8.13") between all curves.

UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR3210
3500 RPM, 60-Hz
Suction: 3" Flange
Discharge: 2" Flange
S.G. 1.0

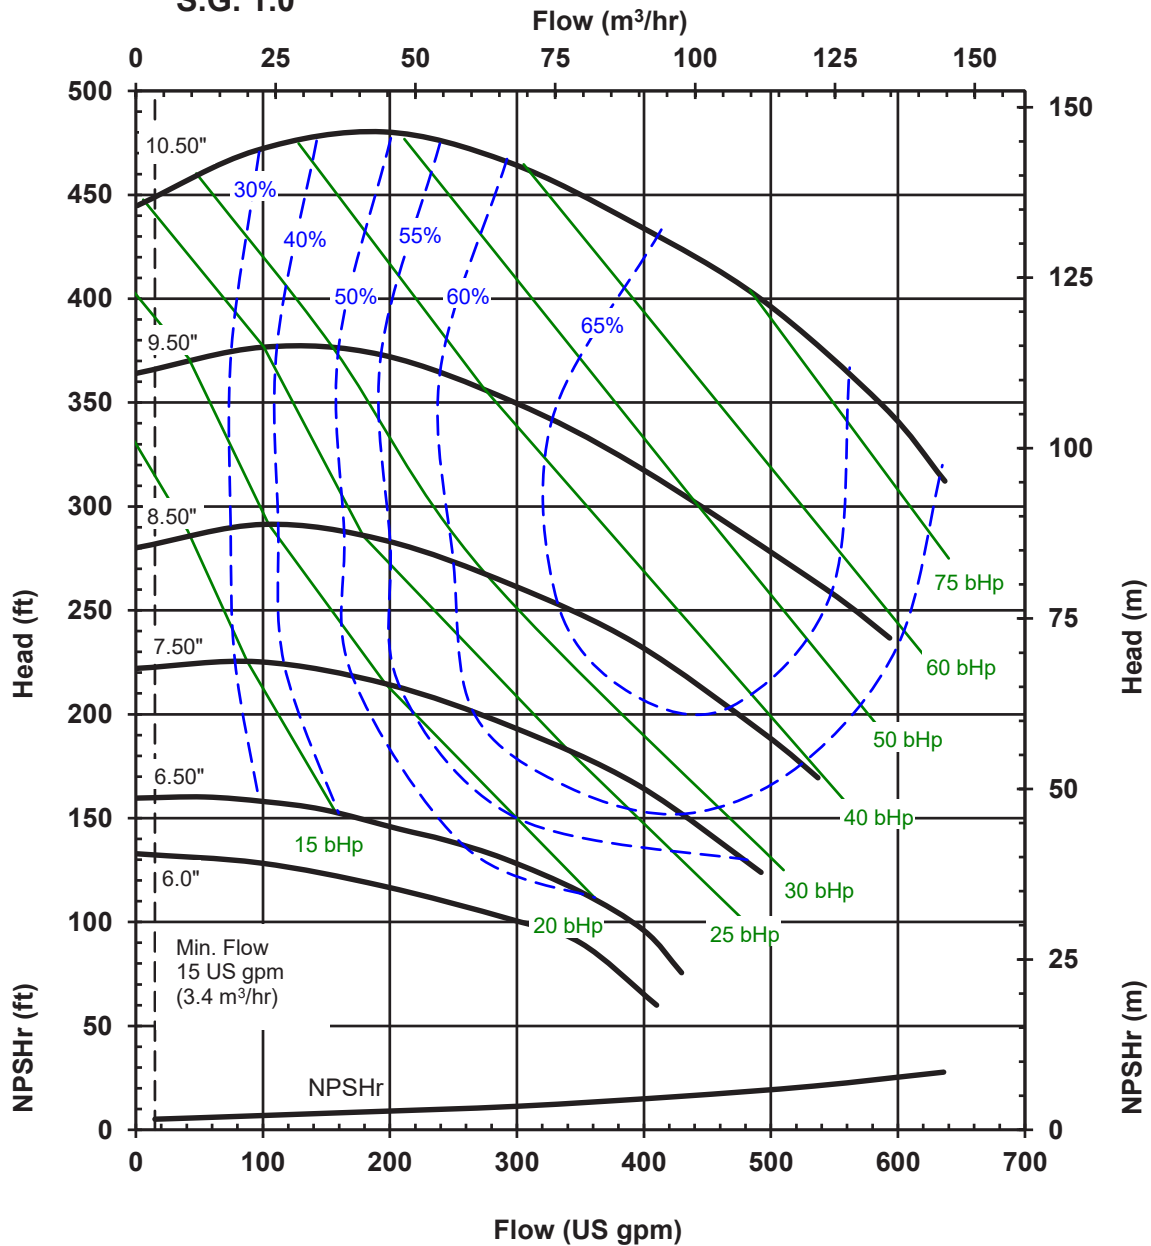


Impeller trims are available in 1/8" diameter increments (ex: 6.13", 10.37") between all curves



UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR3210
1750 RPM, 60-Hz
Suction: 3" Flange
Discharge: 2" Flange
S.G. 1.0

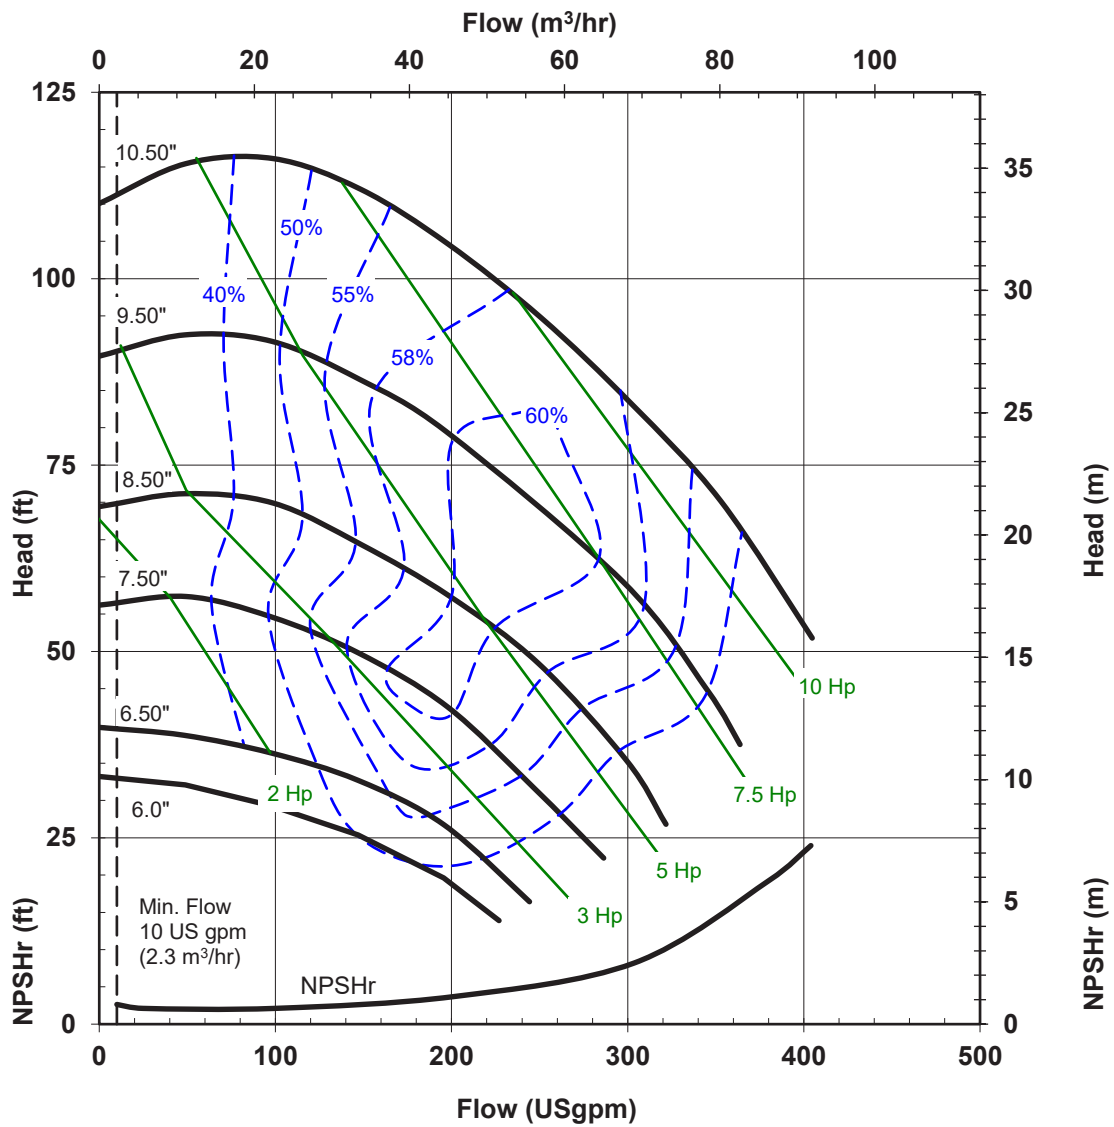

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 10.37") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR3210
2900 RPM, 50-Hz
Suction: 3" Flange
Discharge: 2" Flange
S.G. 1.0

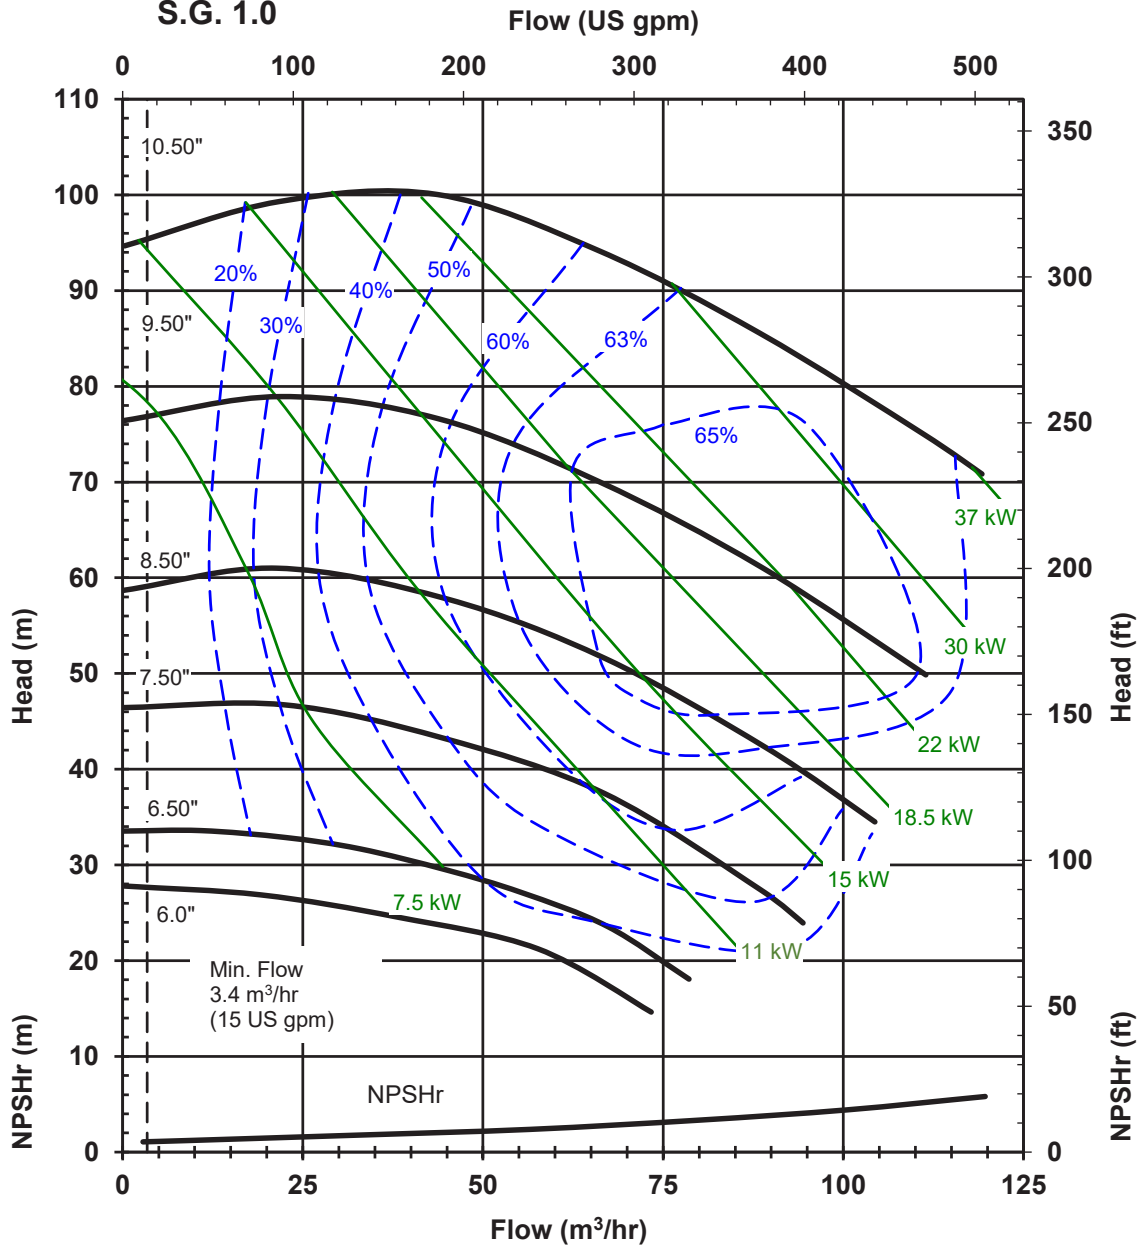

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 10.37") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR3210
1450 RPM, 50-Hz
Suction: 3" Flange
Discharge: 2" Flange
S.G 1.0

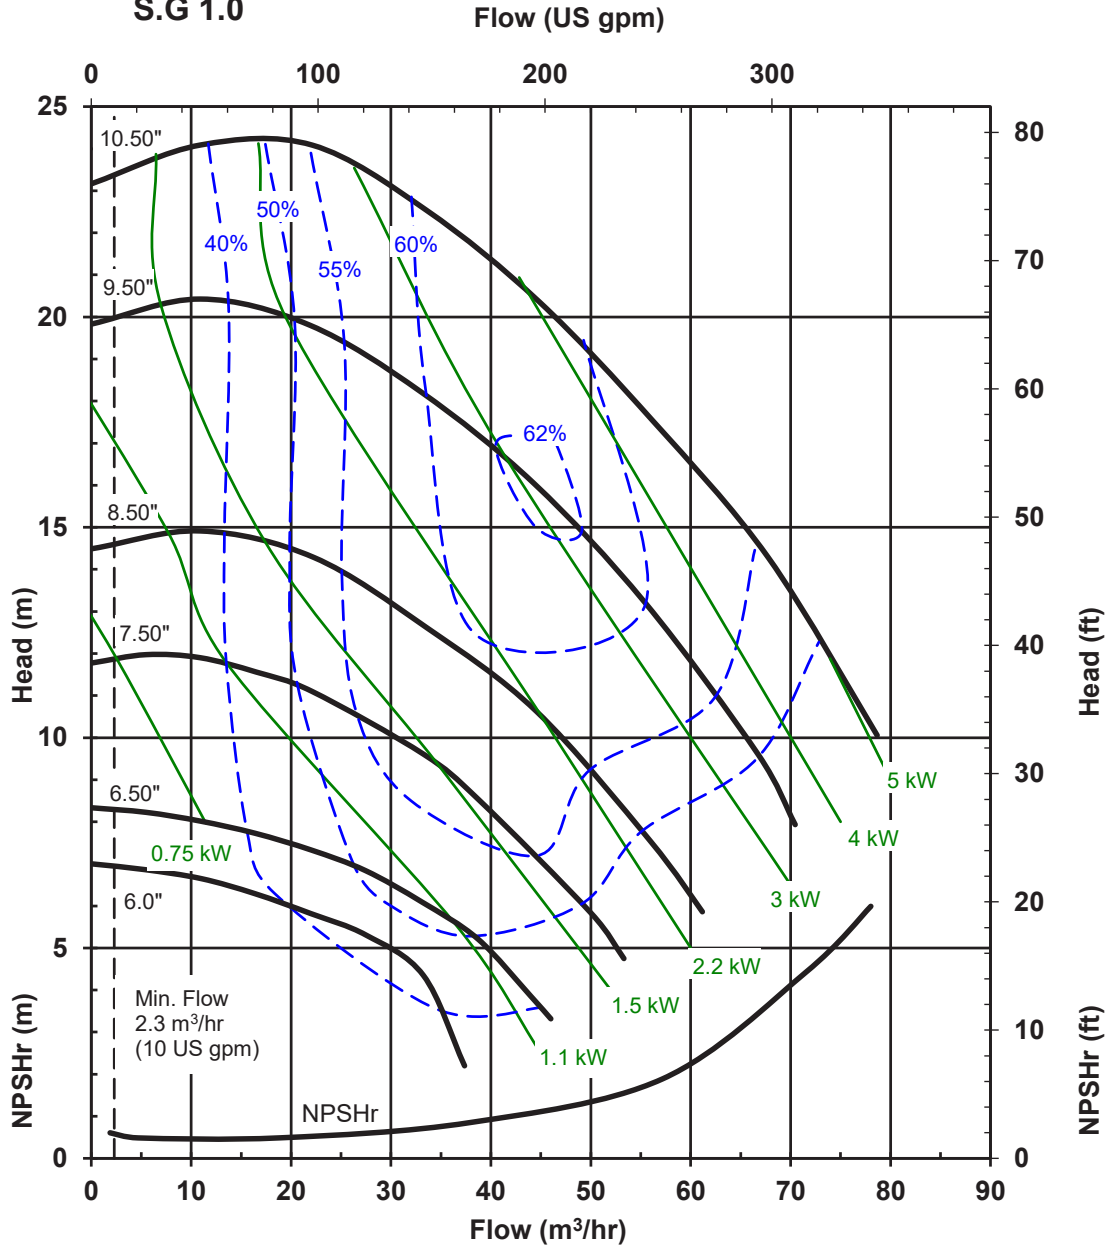

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 10.37") between all curves.

UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR436
3500 RPM, 60-Hz
Suction: 4" Flange
Discharge: 3" Flange
S.G. 1.0

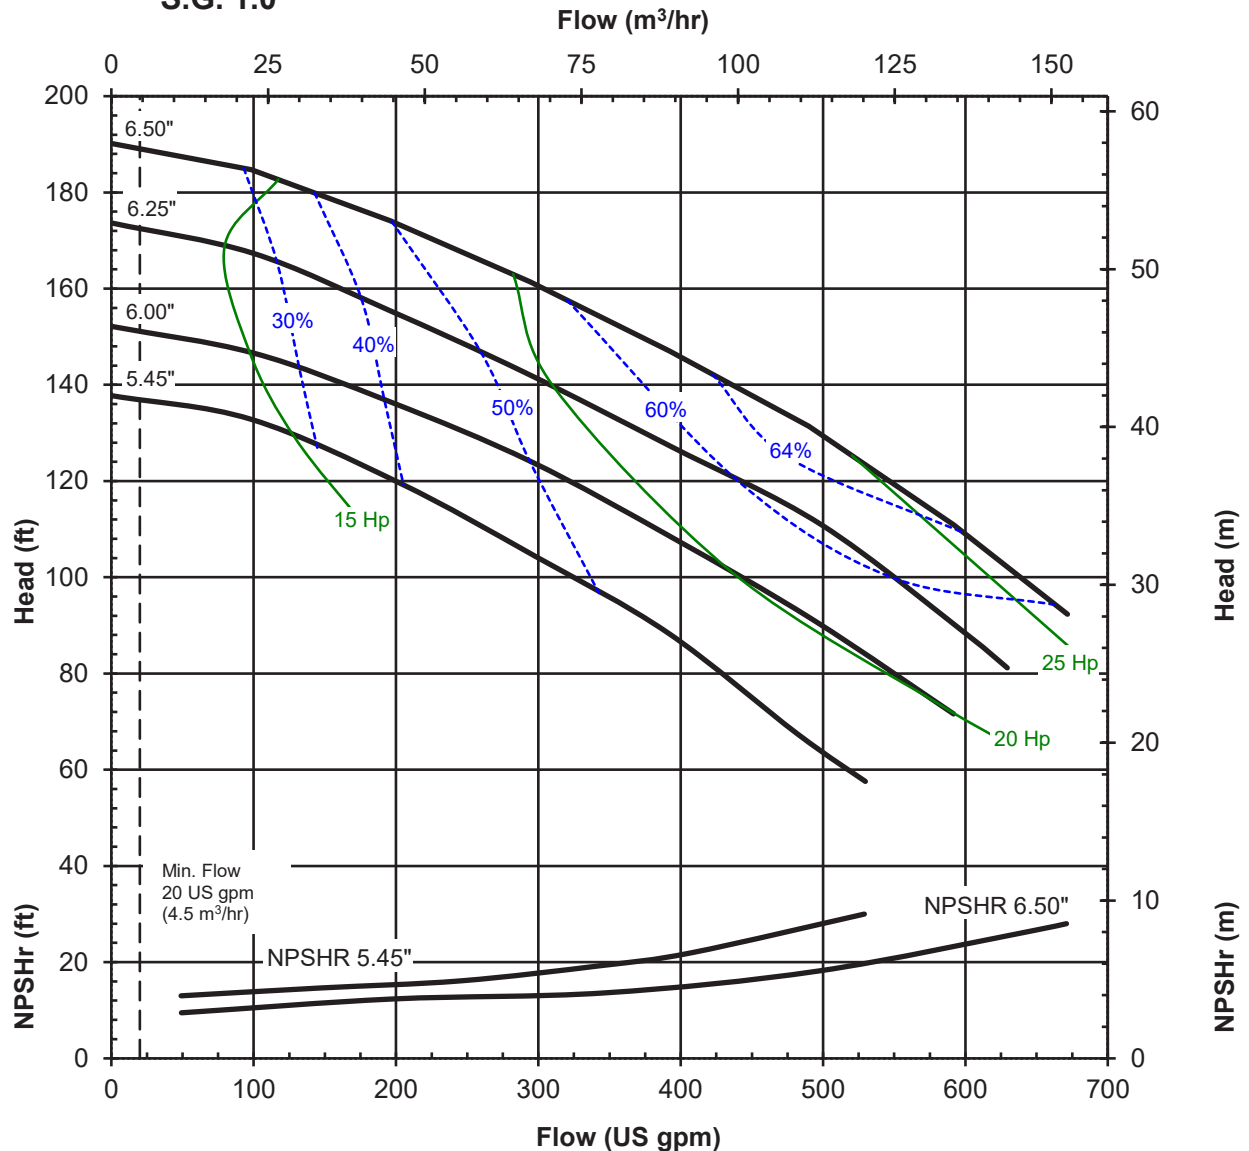


Impeller trims are available in 1/8" diameter increments (ex: 5.81", 6.37") between all curves



UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR436
1750 RPM, 60-Hz
Suction: 4" Flange
Discharge: 3" Flange
S.G. 1.0

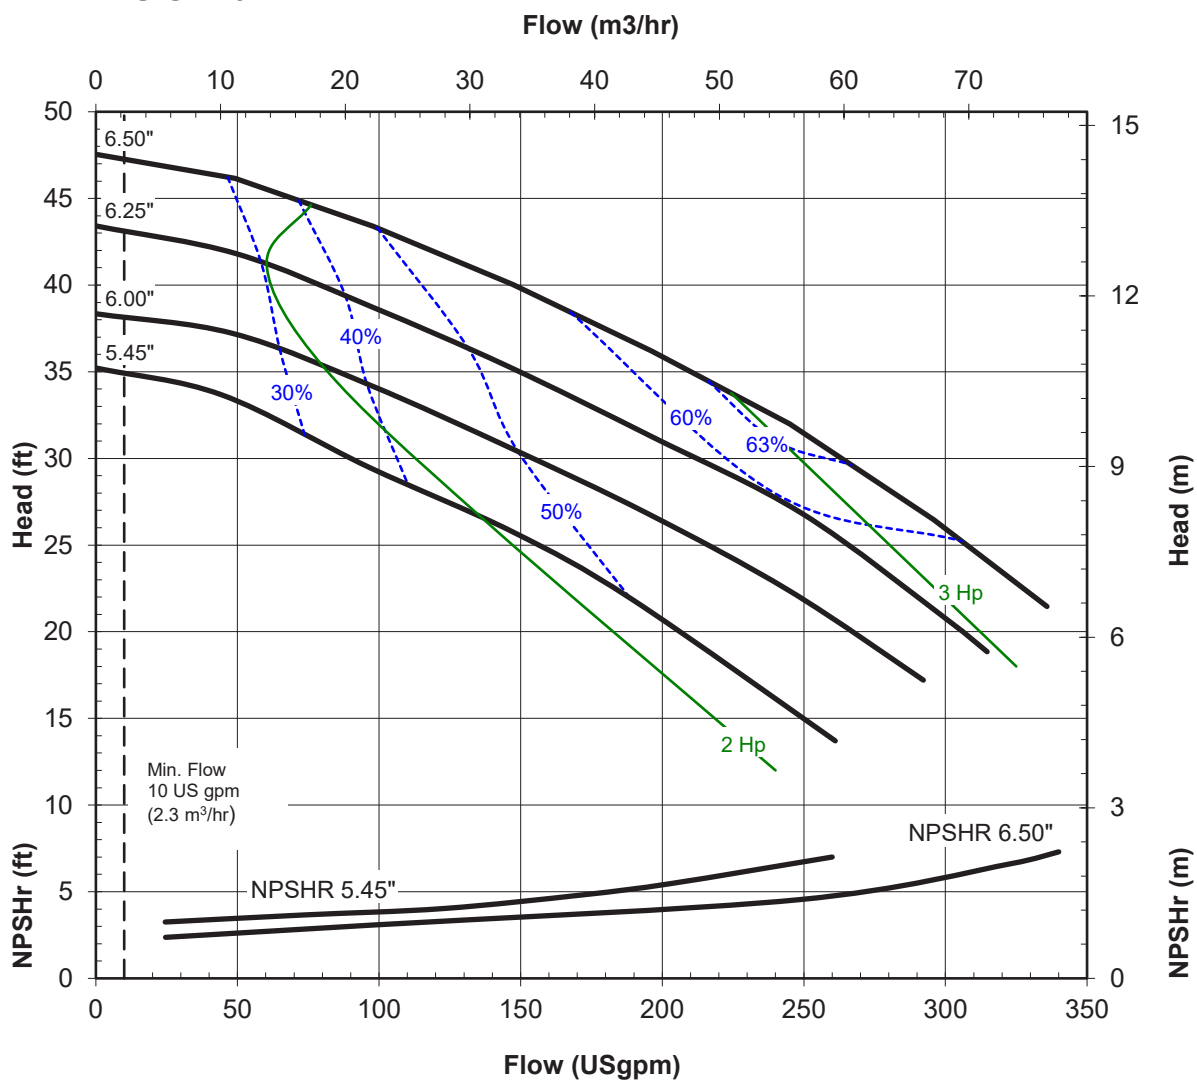

Impeller trims are available in 1/8" diameter increments (ex: 5.81", 6.37") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR436
2900 RPM, 50-Hz
Suction: 4" Flange
Discharge: 3" Flange
S.G. 1.0

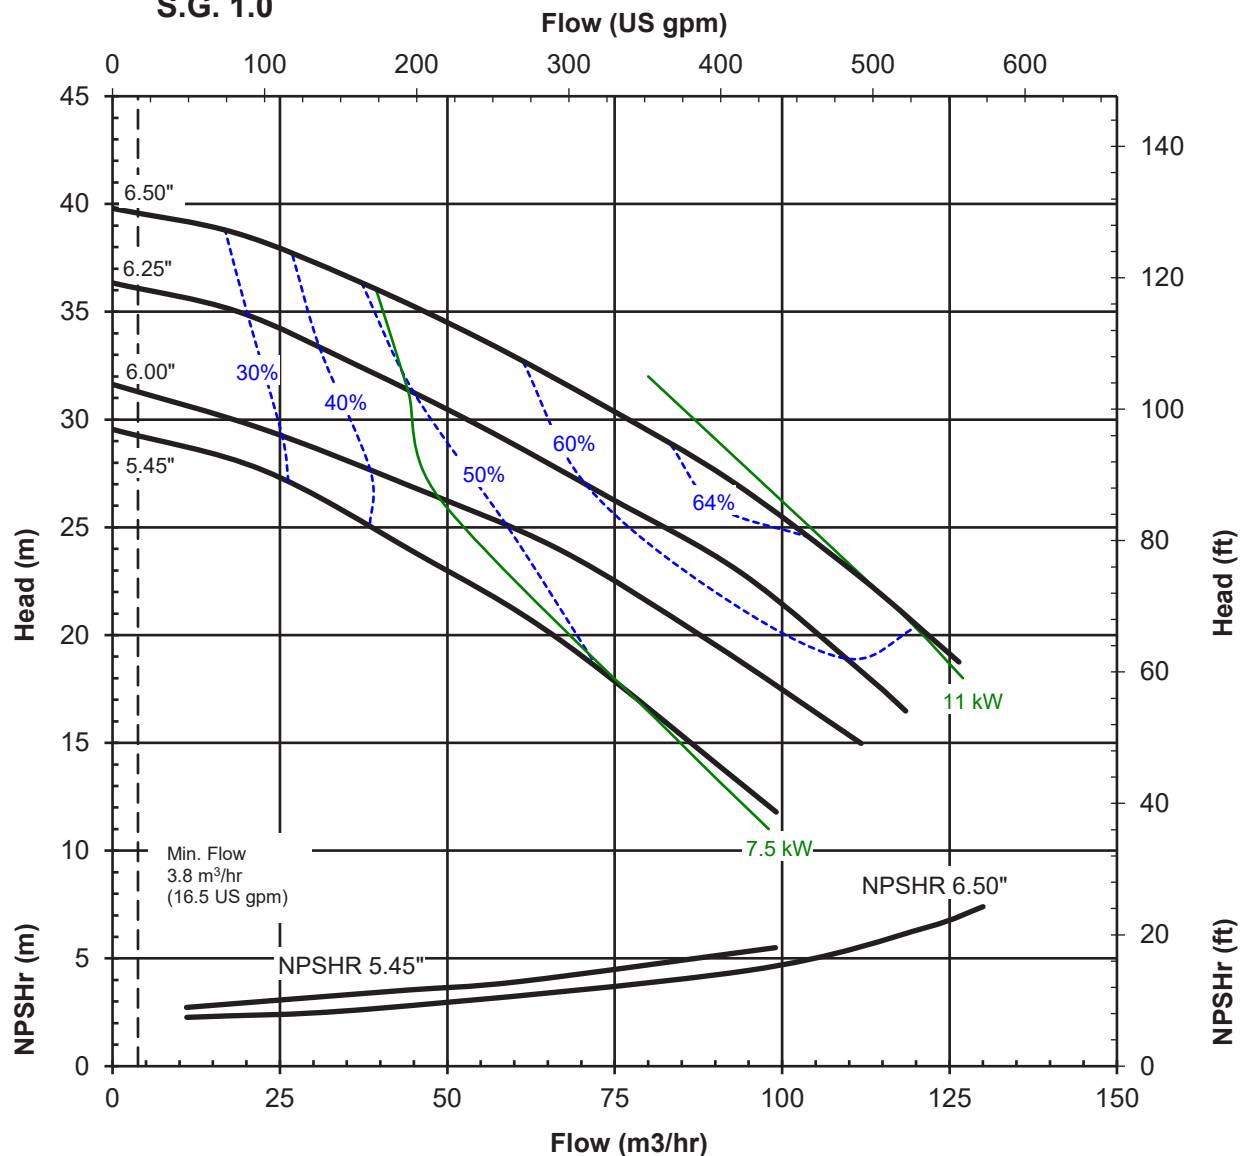

Impeller trims are available in 1/8" diameter increments (ex: 5.81", 6.37") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR436
1450 RPM, 50-Hz
Suction: 4" Flange
Discharge: 3" Flange
S.G. 1.0

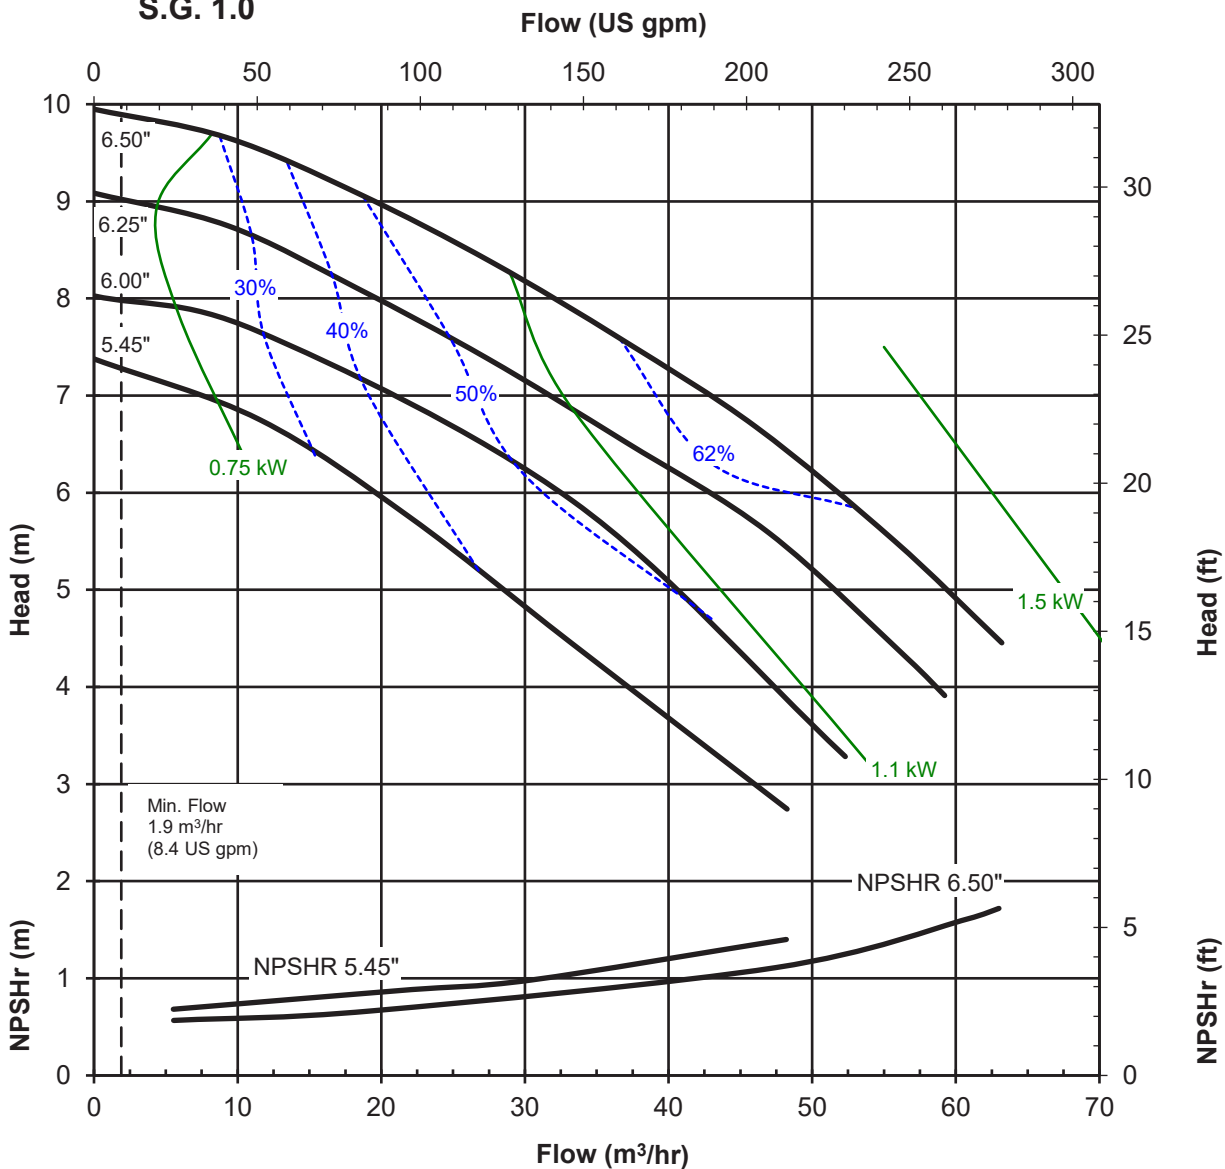

Impeller trims are available in 1/8" diameter increments (ex: 5.81", 6.37") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR436L
3500 RPM, 60-Hz
Suction: 4" Flange
Discharge: 3" Flange
S.G. 1.0

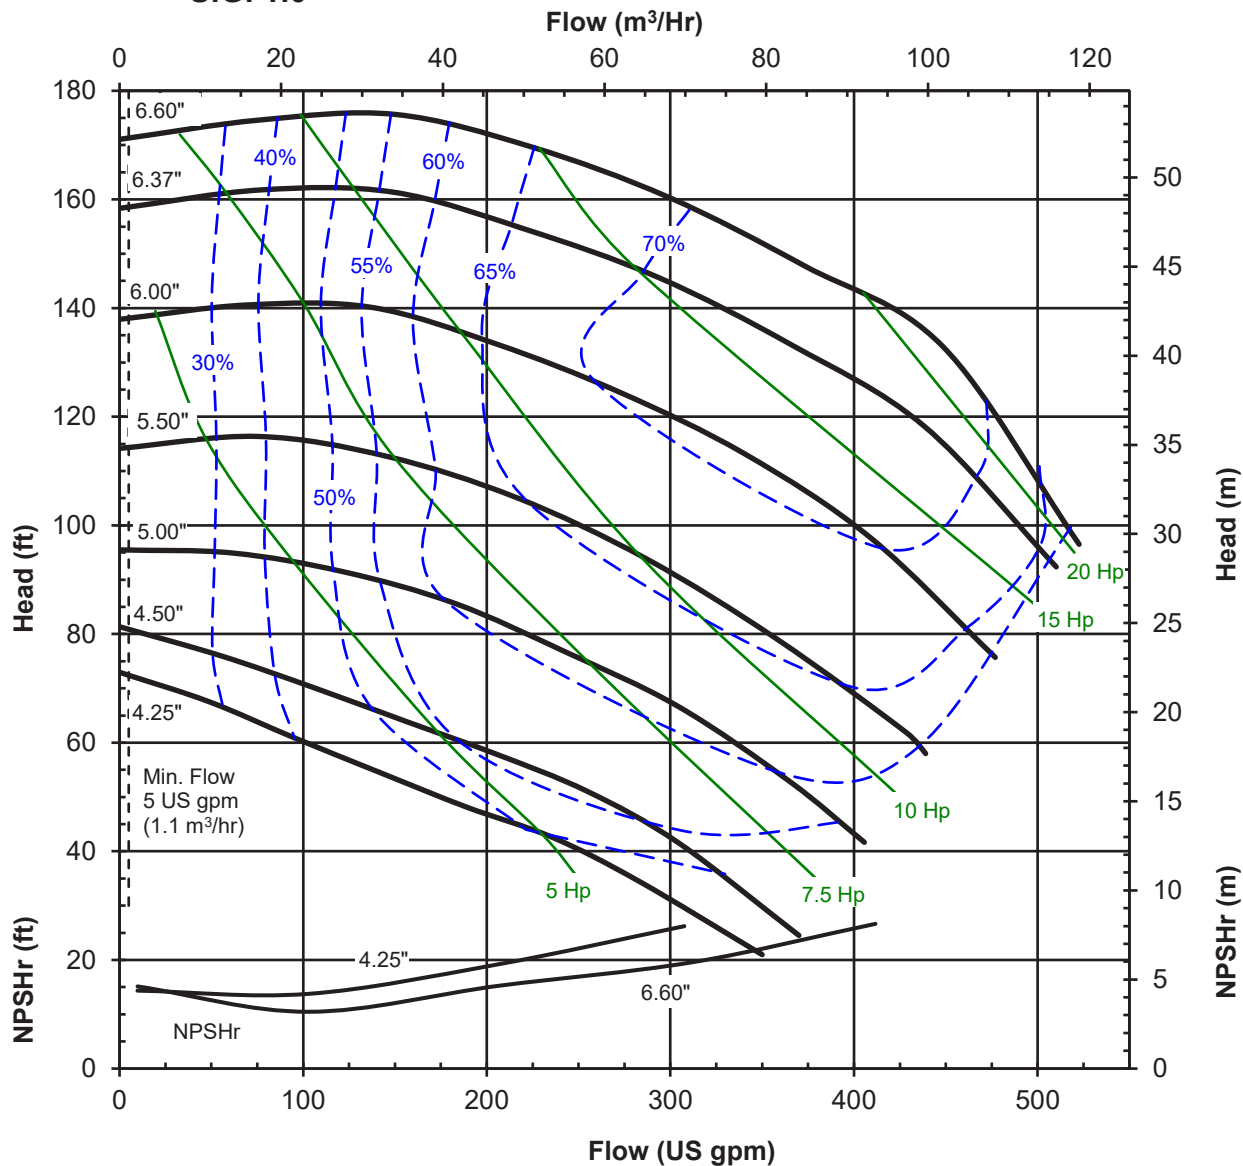


Impeller trims are available in 1/8" diameter increments (ex: 4.63", 6.13") between all curves



UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR436L
1750 RPM, 30-Hz
Suction: 4" Flange
Discharge: 3" Flange
S.G. 1.0

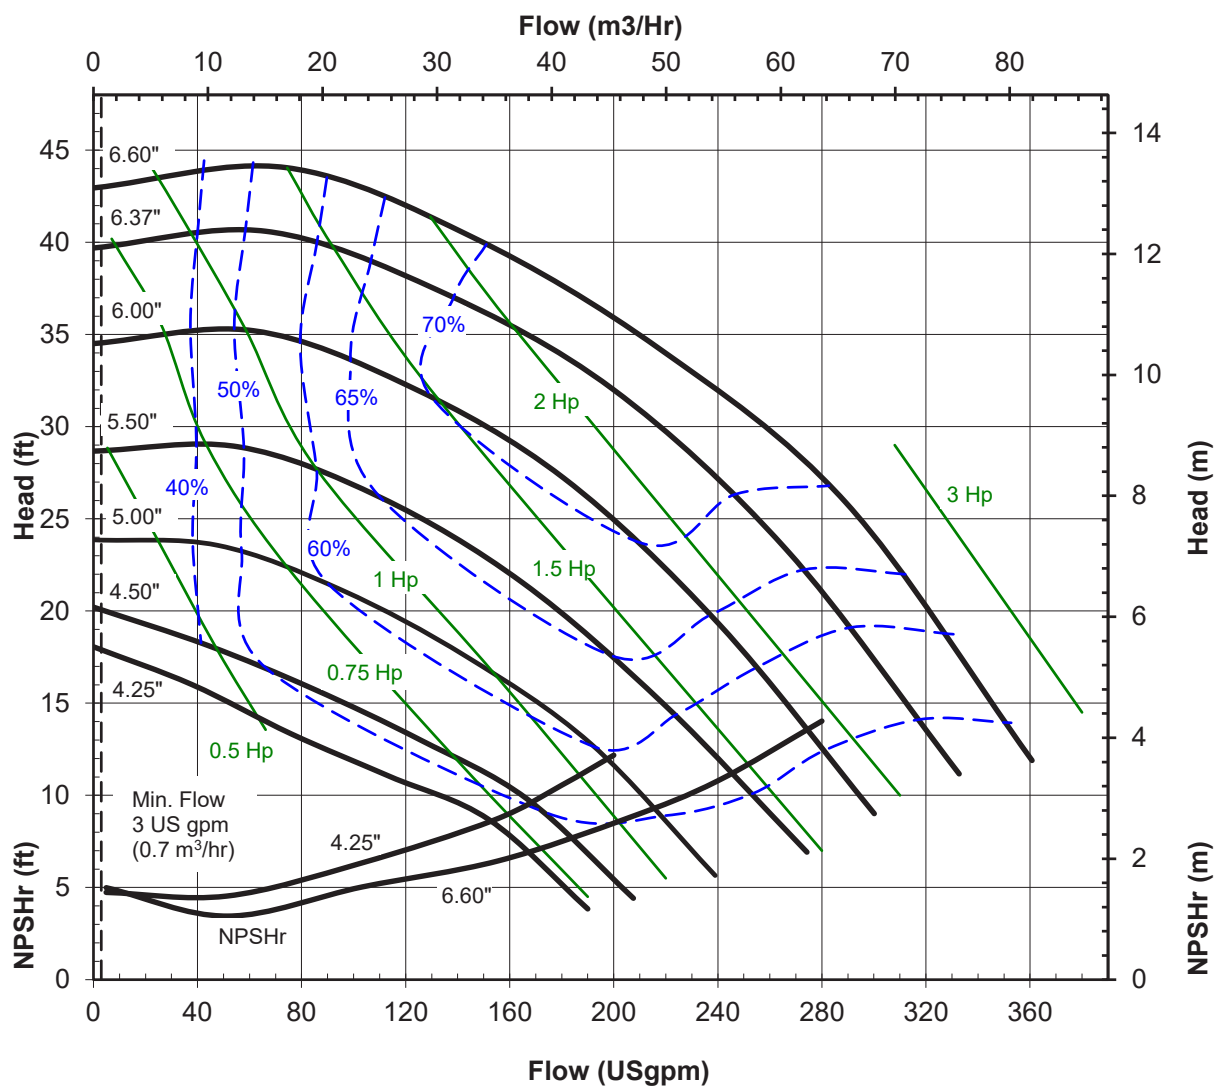

Impeller trims are available in 1/8" diameter increments (ex: 4.63", 6.13") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR436L
2900 RPM, 50-Hz
Suction: 4" Flange
Discharge: 3" Flange
S.G. 1.0

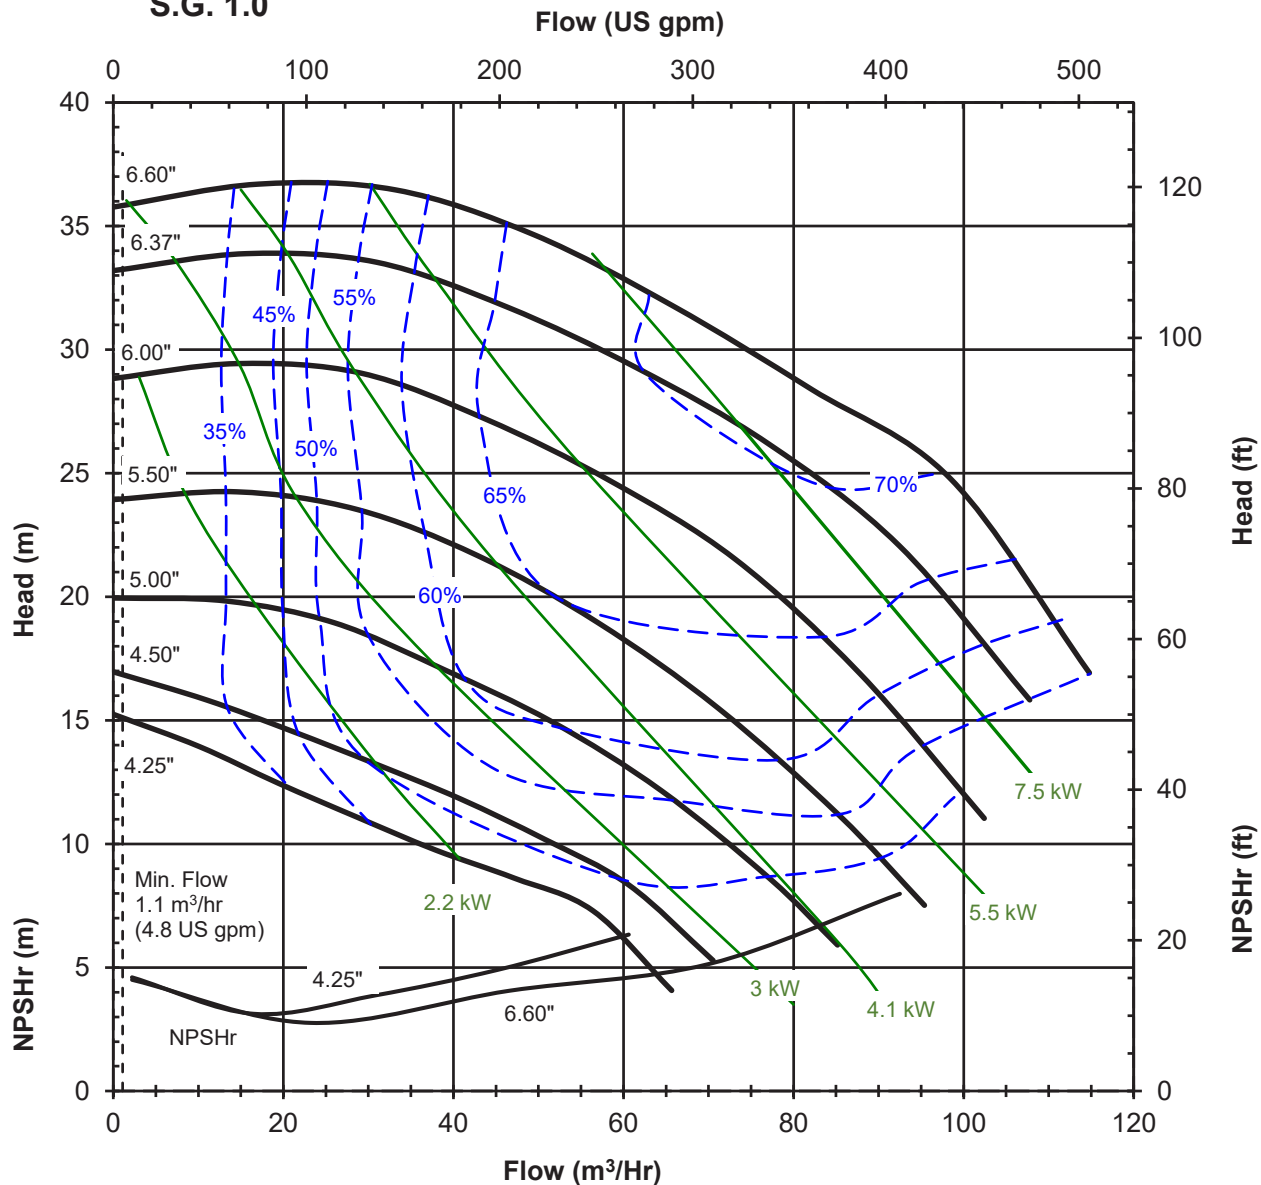

Impeller trims are available in 1/8" diameter increments (ex: 4.63", 6.13") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR436L
1450 RPM, 25-Hz
Suction: 4" Flange
Discharge: 3" Flange
S.G. 1.0

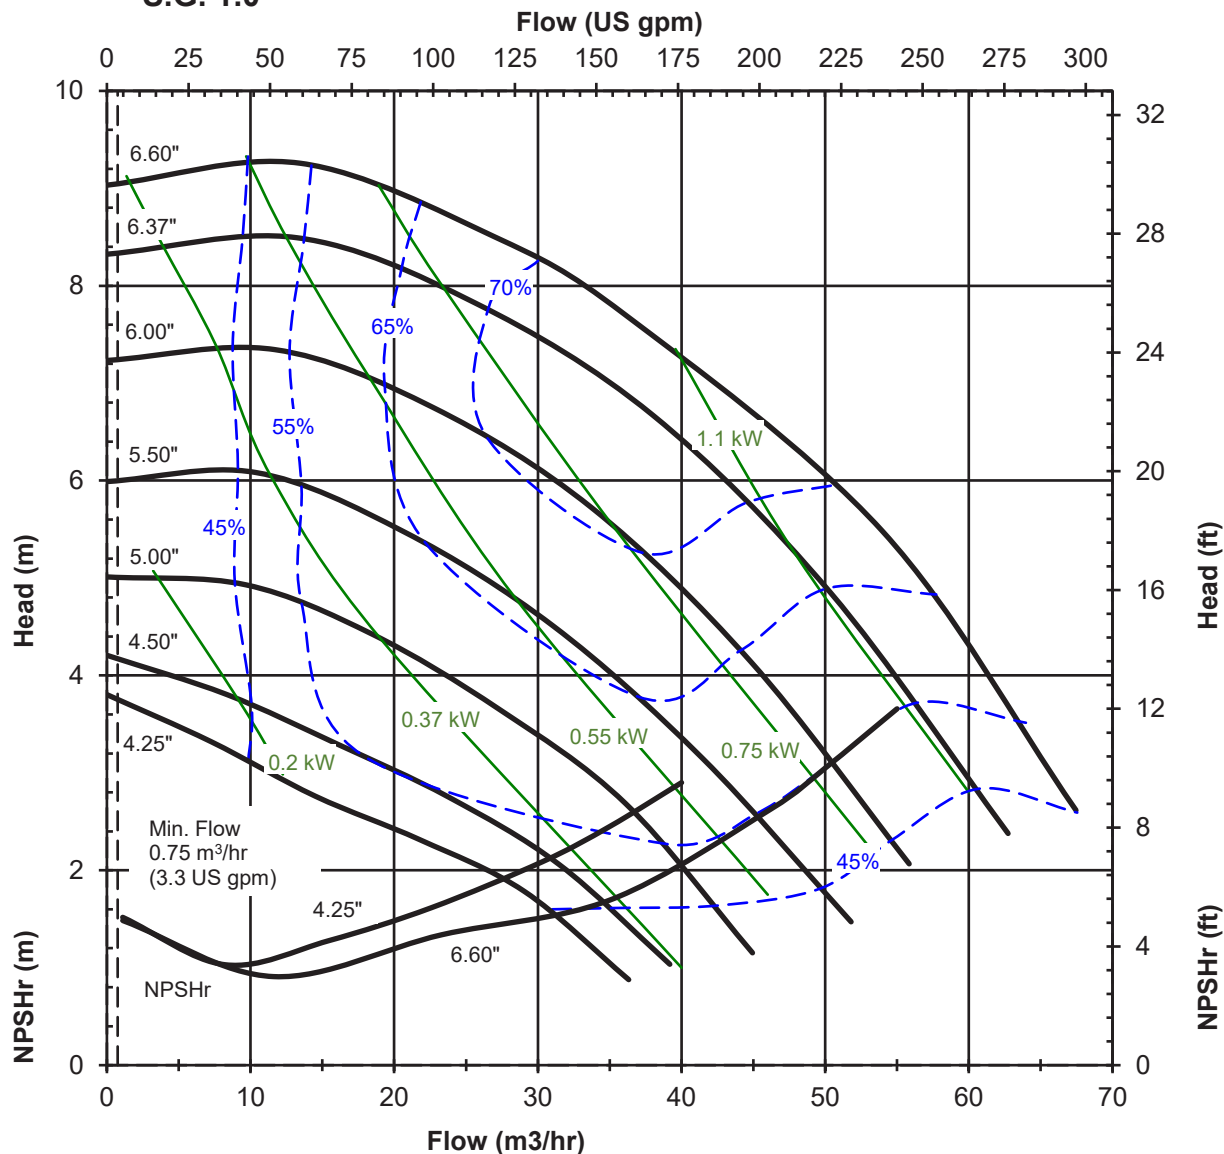

Impeller trims are available in 1/8" diameter increments (ex: 4.63", 6.13") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR438
3500 RPM, 60-Hz
Suction: 4" Flange
Discharge: 3" Flange
S.G. 1.0

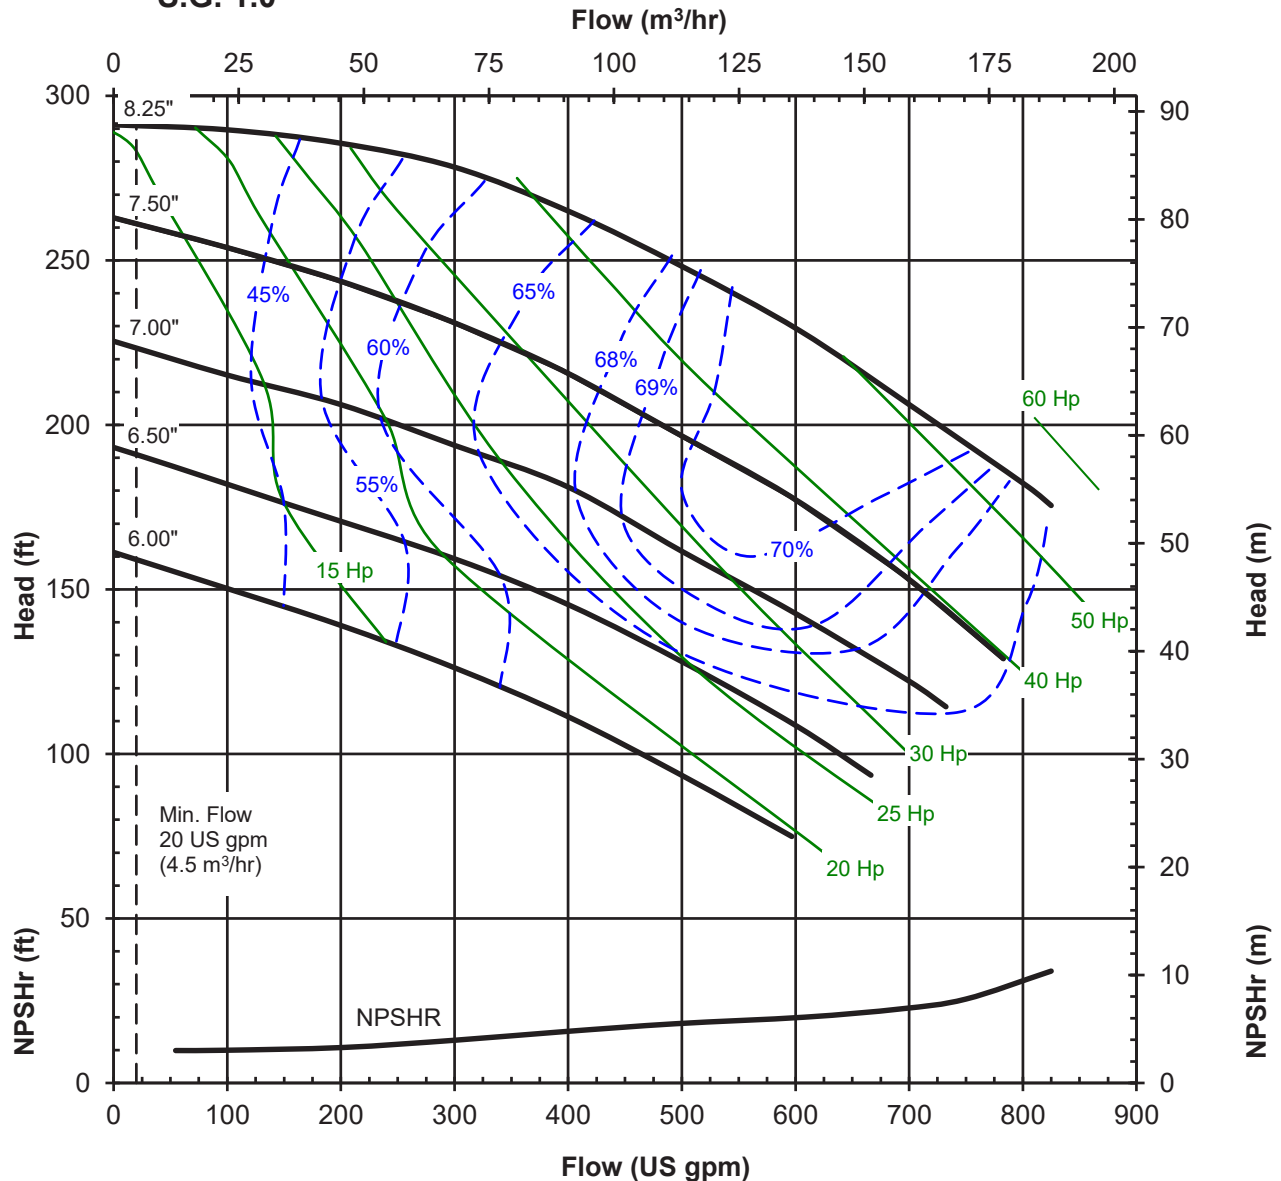


Impeller trims are available in 1/8" diameter increments (ex: 6.13", 7.88") between all curves



UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR438
1750 RPM, 60-Hz
Suction: 4" Flange
Discharge: 3" Flange
S.G. 1.0

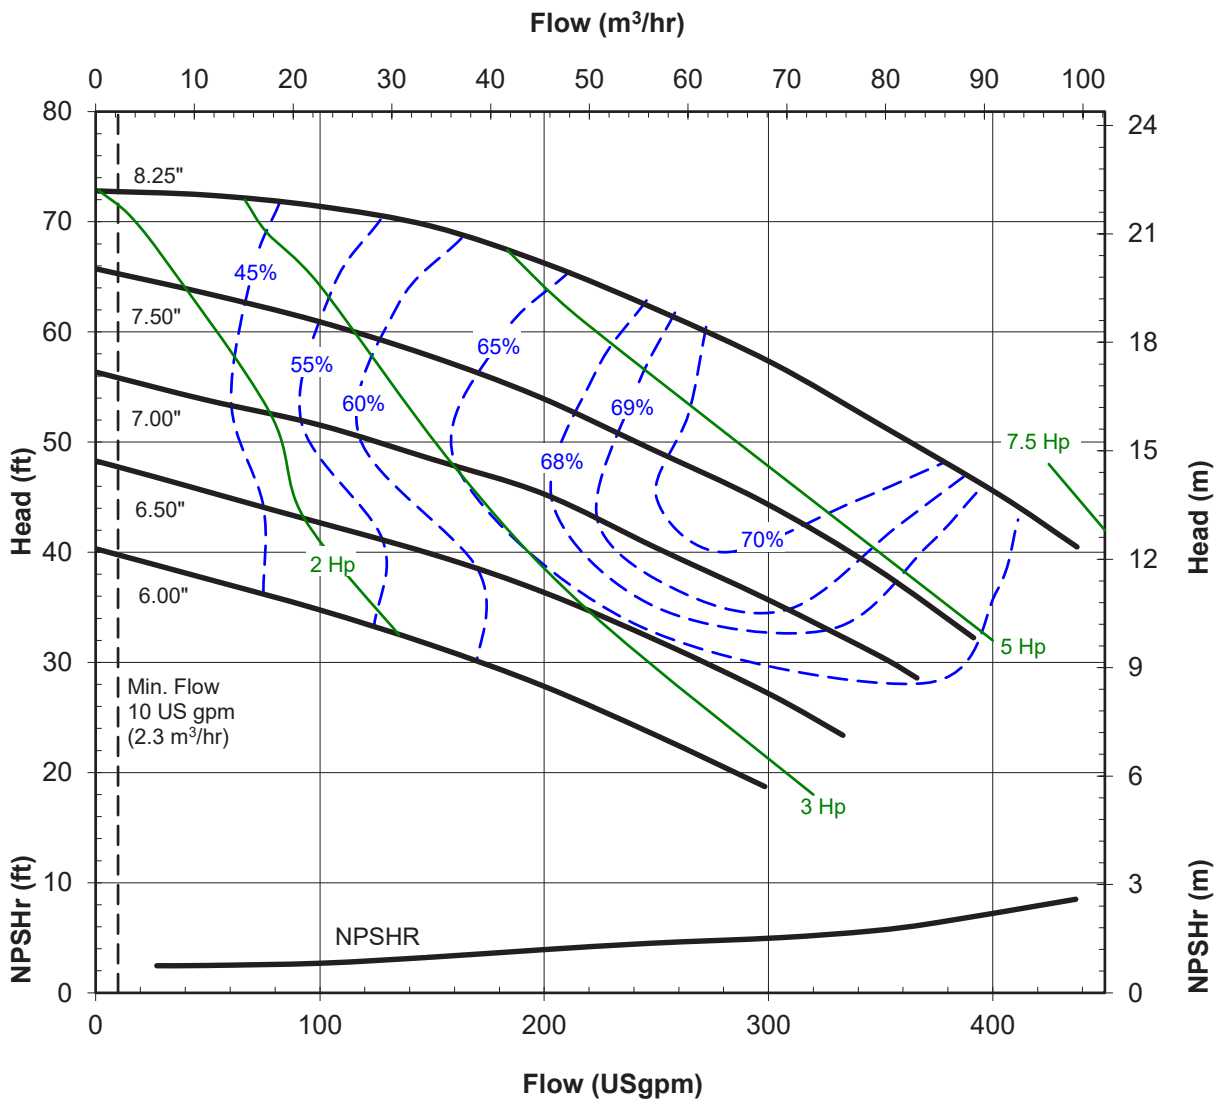


Impeller trims are available in 1/8" diameter increments (ex: 6.13", 7.88") between all curves

4015 Rev 3

UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR438
2900 RPM, 50-Hz
Suction: 4" Flange
Discharge: 3" Flange
S.G. 1.0

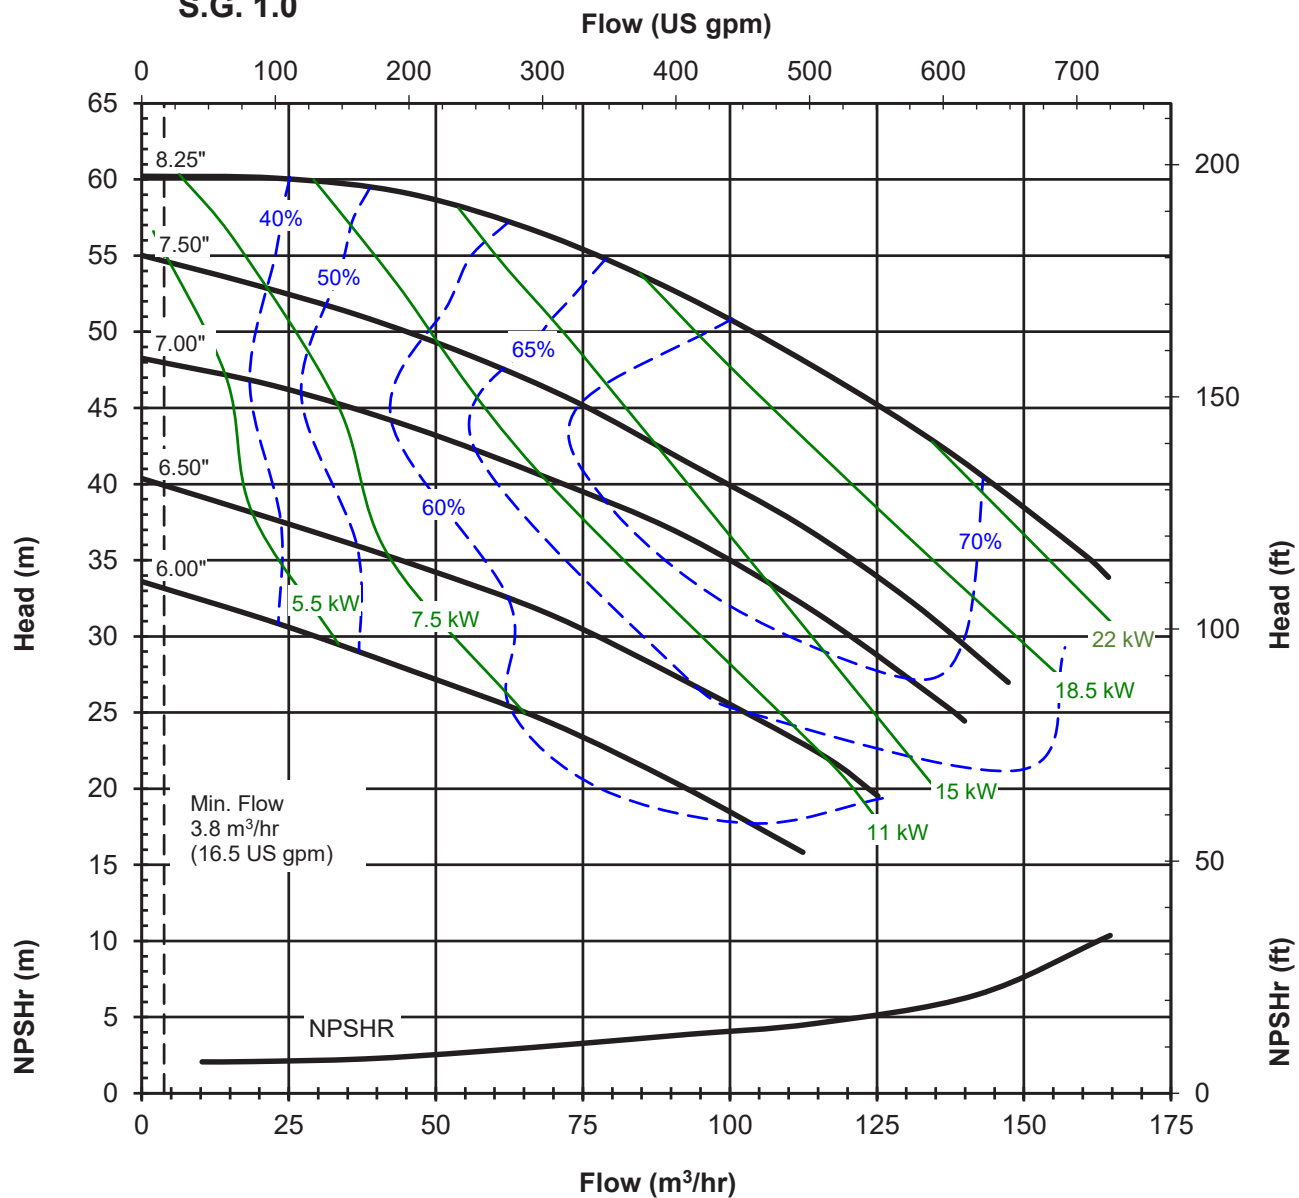

Impeller trims are available in 1/8" diameter increments (ex: 6.13", 7.88") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR438
1450 RPM, 50-Hz
Suction: 4" Flange
Discharge: 3" Flange
S.G 1.0

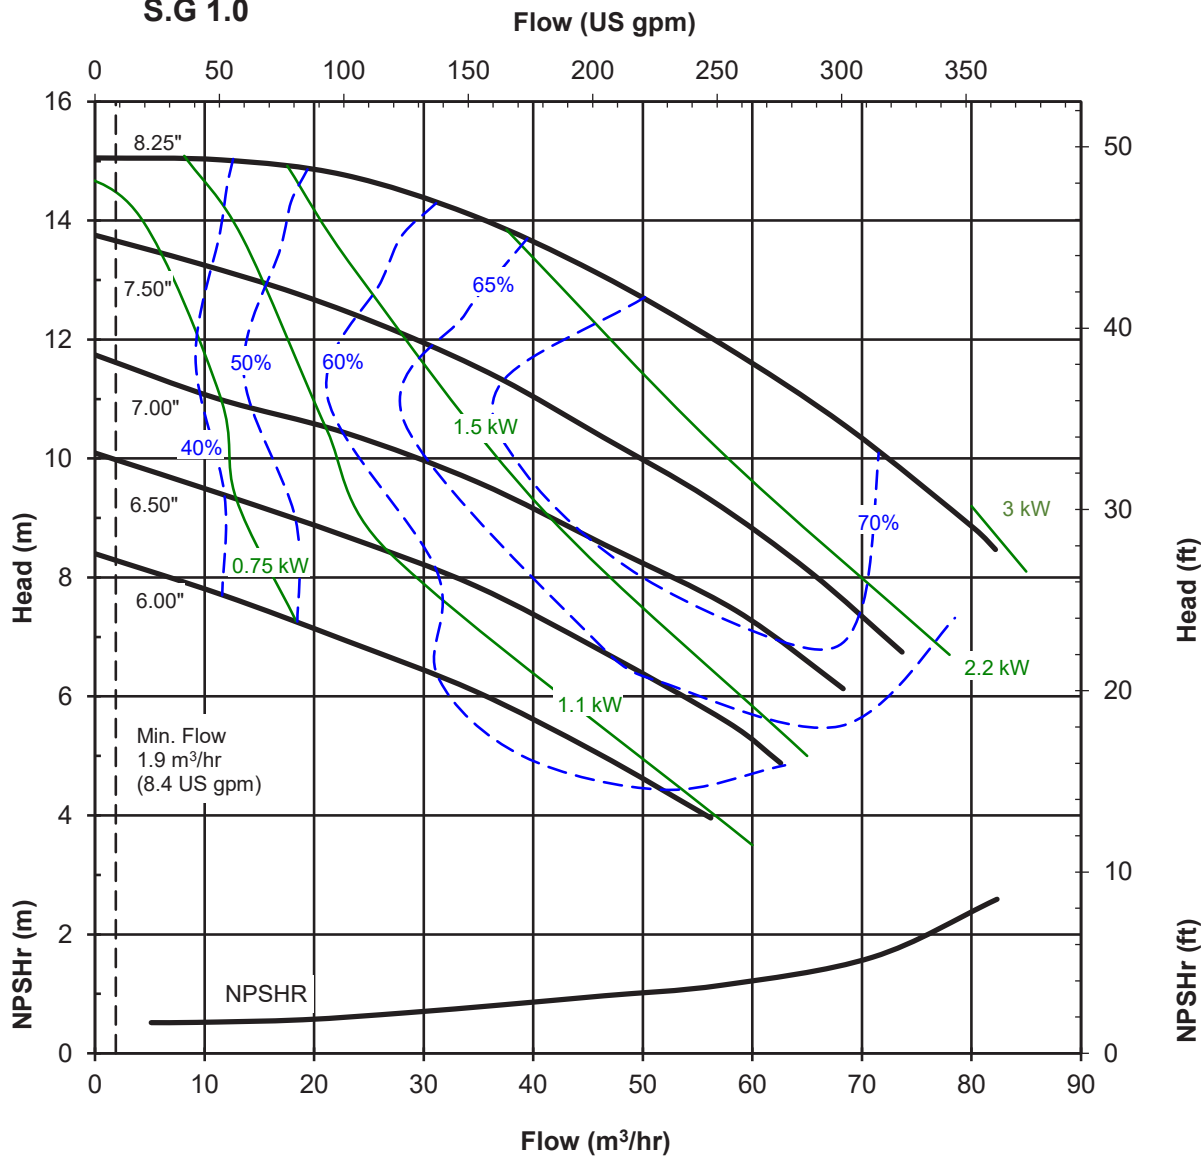


Impeller trims are available in 1/8" diameter increments (ex: 6.13", 7.88") between all curves.



UCR SERIES STANDARD PERFORMANCE CURVE


Model: UCR4310H
1750 RPM, 60-Hz
Suction: 4" Flange
Discharge: 3" Flange
S.G. 1.0

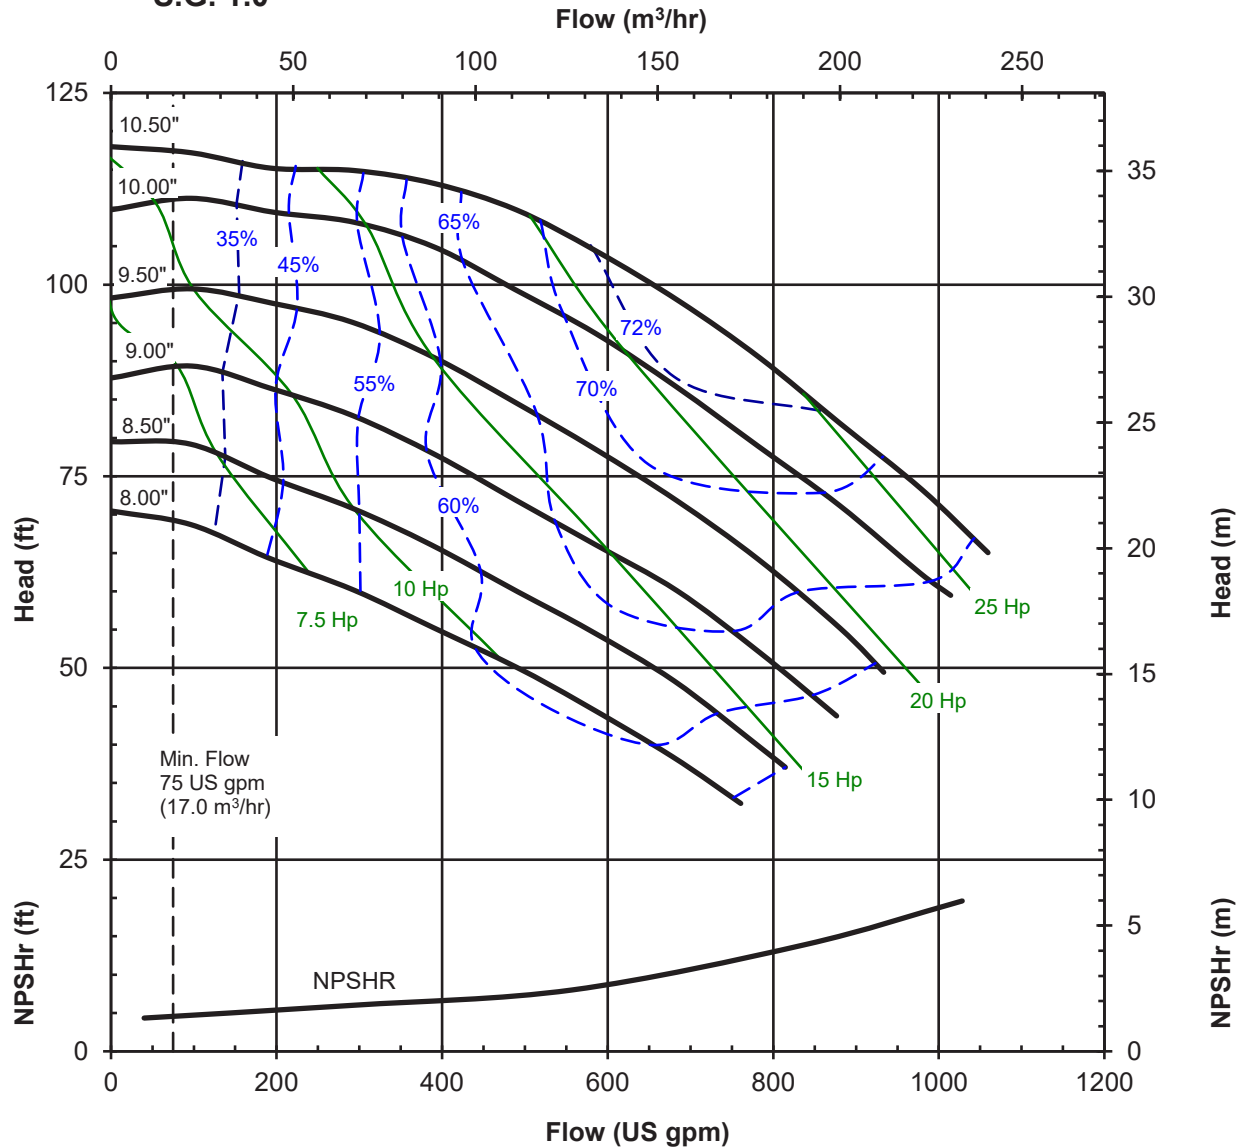

Impeller trims are available in 1/8" diameter increments (ex: 8.13", 10.37") between all curves

UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR4310H
1450 RPM, 50-Hz
Suction: 4" Flange
Discharge: 3" Flange
S.G. 1.0

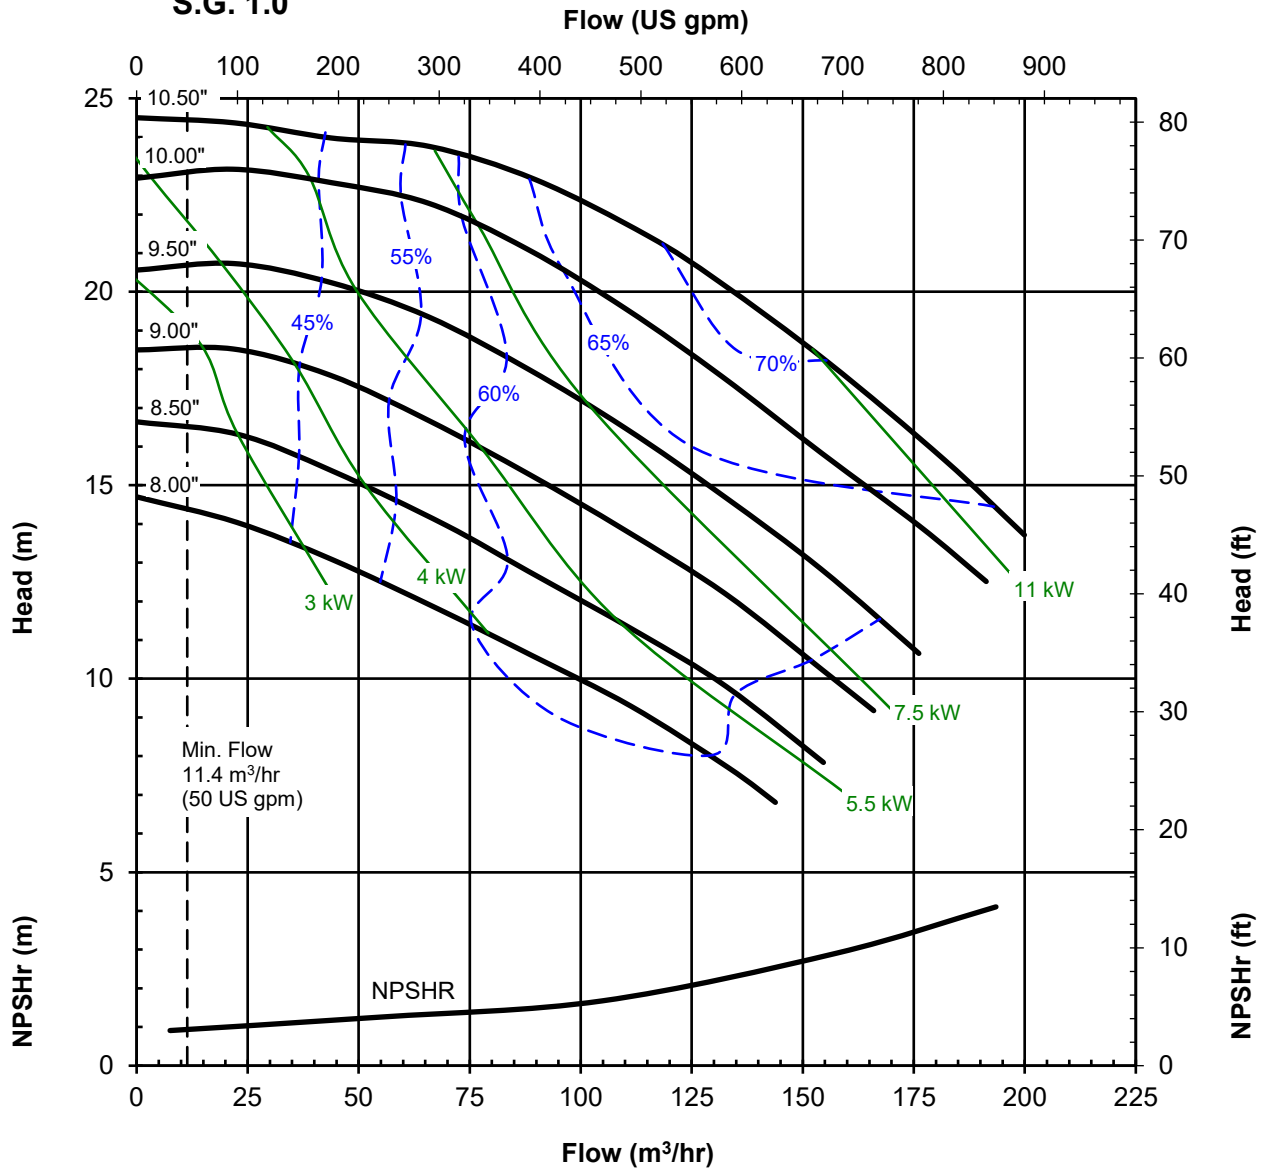


Impeller trims are available in 1/8" diameter increments (ex: 8.13", 10.37") between all curves



UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR6410
1750 RPM, 60-Hz
Suction: 6" Flange
Discharge: 4" Flange
S.G. 1.0

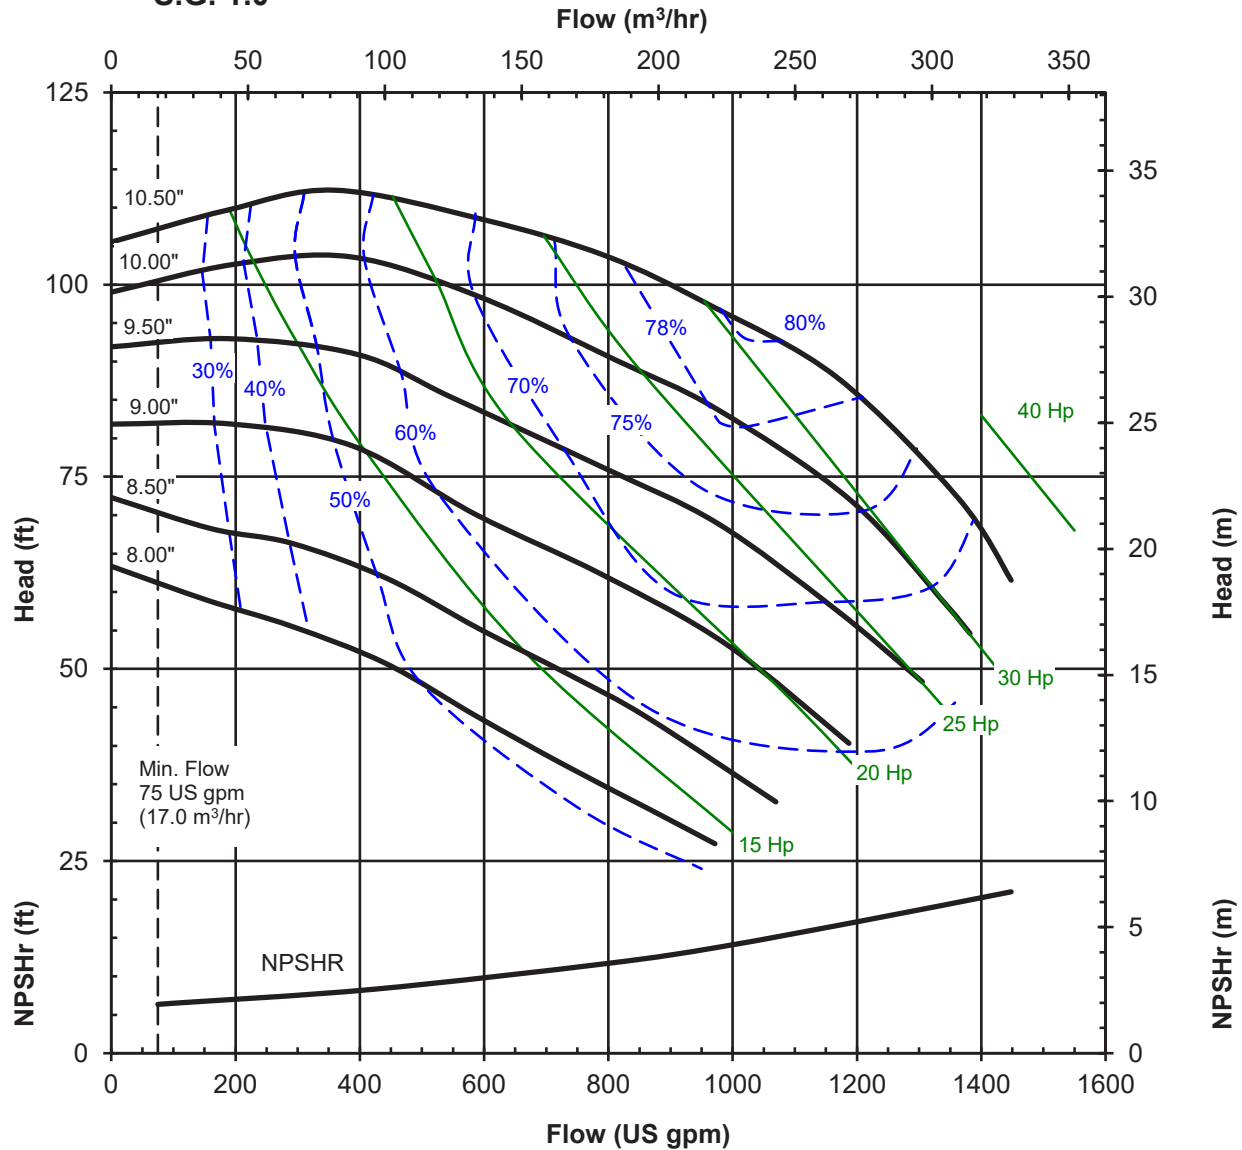


Impeller trims are available in 1/8" diameter increments (ex: 8.13", 10.37") between all curves



UCR SERIES STANDARD PERFORMANCE CURVE

Model: UCR6410
1450 RPM, 50-Hz
Suction: 6" Flange
Discharge: 4" Flange
S.G. 1.0

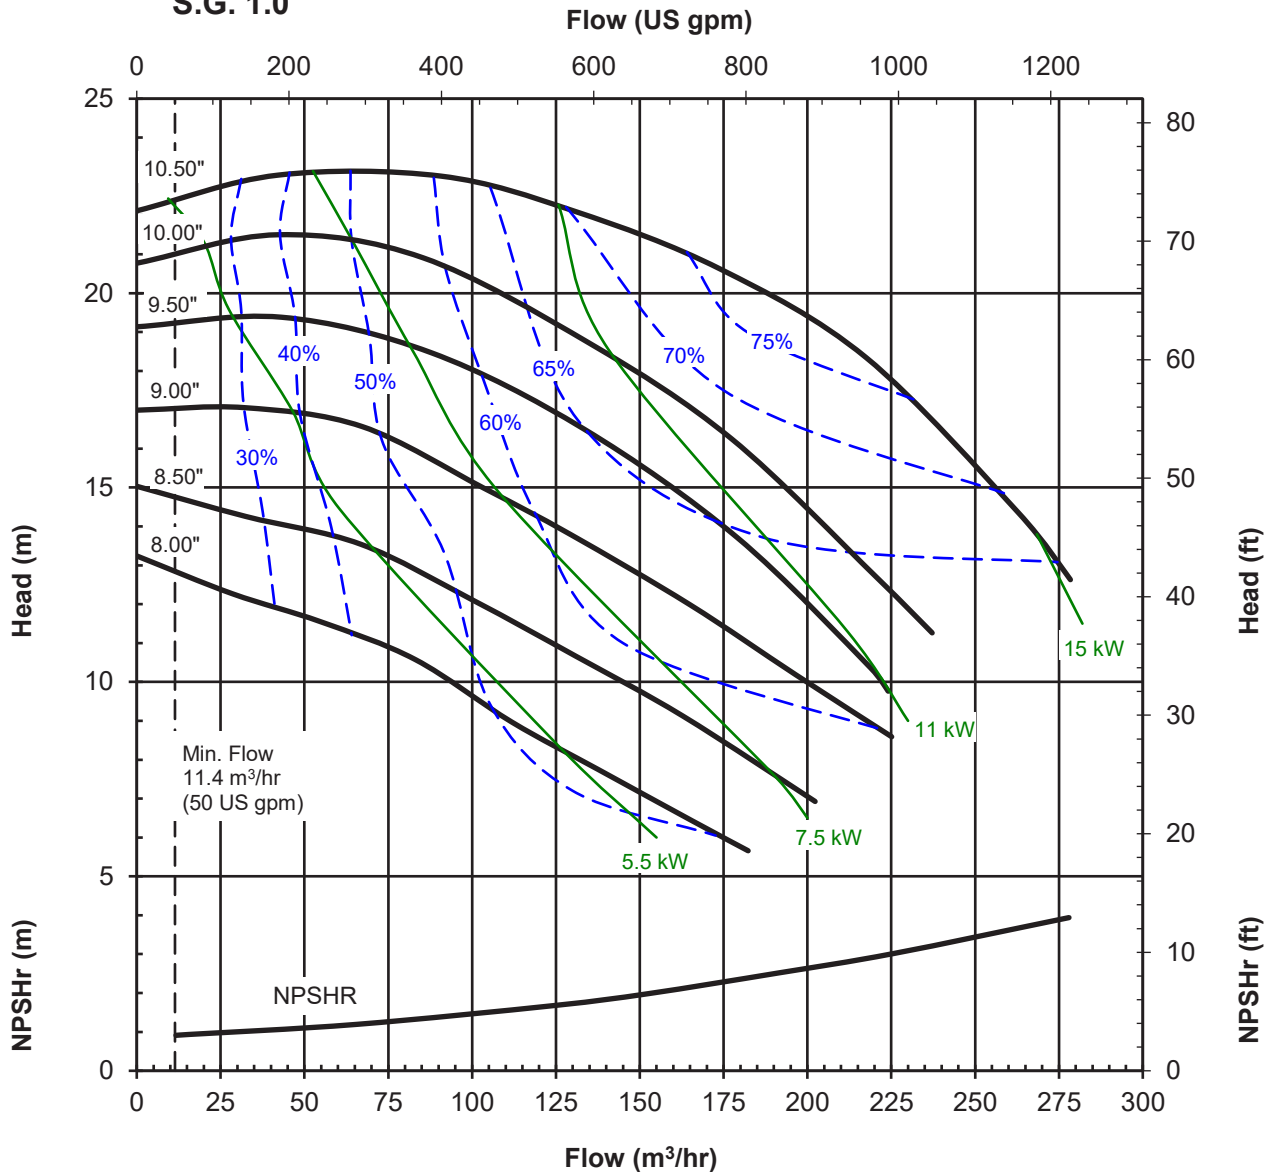

Impeller trims are available in 1/8" diameter increments (ex: 8.13", 10.37") between all curves